
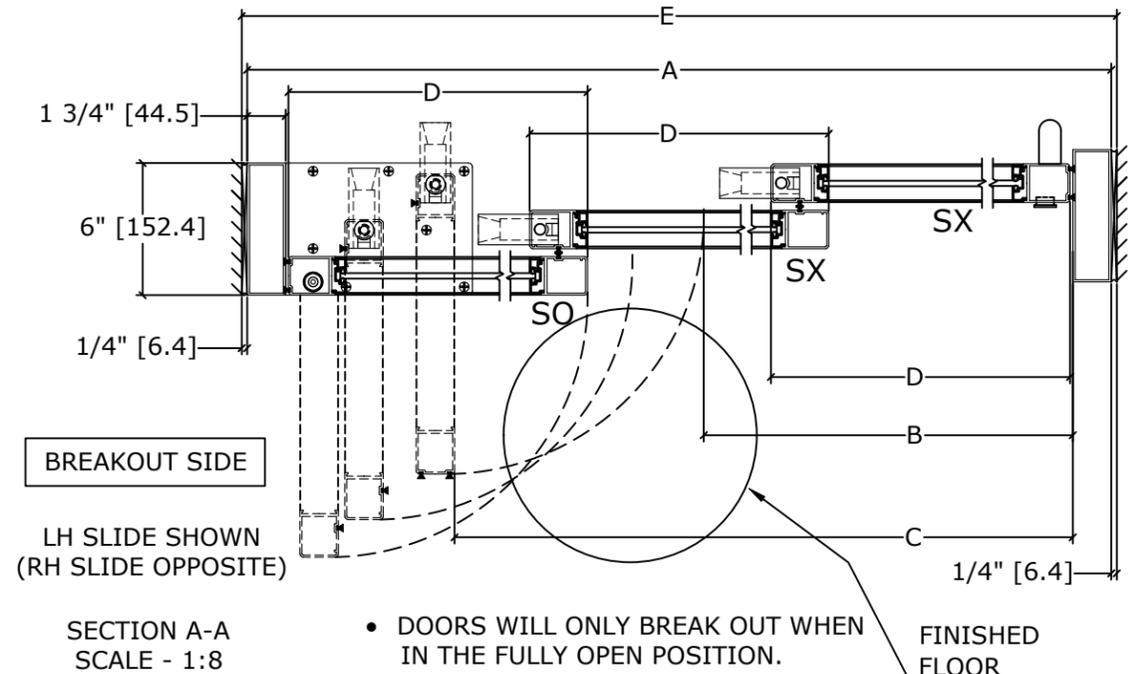
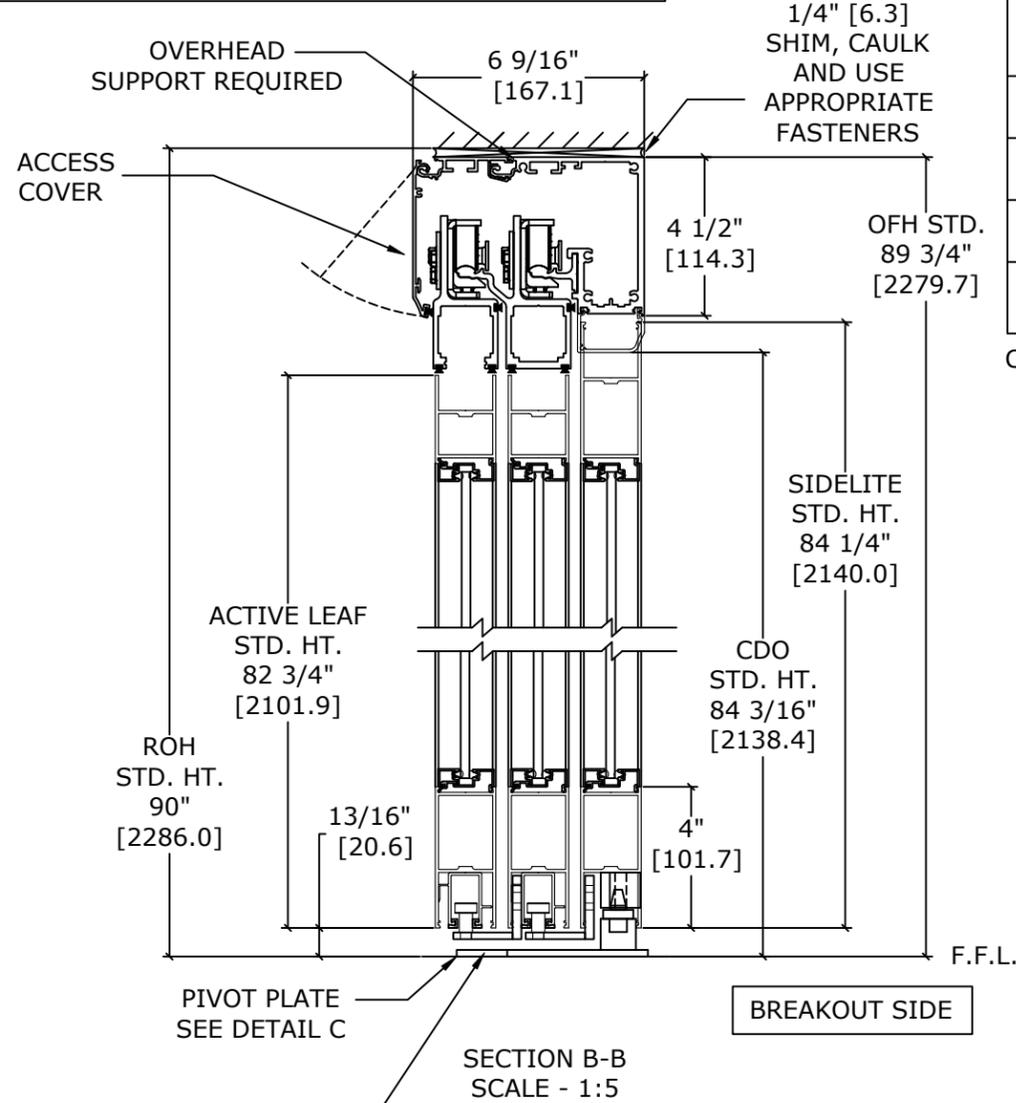


| MODEL NO. | OVERALL FRAME WIDTH (A) | CLEAR DOOR OPENING (B) | BREAKOUT OPENING (C) | ACTIVE & SIDELITE LEAF WIDTH (D) | ROUGH OPENING WIDTH (E) |
|------------|-------------------------|------------------------------------|------------------------|----------------------------------|-------------------------|
| VMT3FBO-8 | 96" [2438.4] | 53 3/4" [1365.3] | 82 1/2" [2095.5] | 32 1/2" [825.5] | 96 1/2" [2451.1] |
| VMT3FBO-10 | 120" [3048.0] | 69 3/4" [1771.7] | 106 1/2" [2705.1] | 40 1/2" [1028.7] | 120 1/2" [3060.7] |
| VMT3FBO-12 | 144" [3657.6] | 85 3/4" [2178.1] | 130 1/2" [3314.7] | 48 1/2" [1231.9] | 144 1/2" [3670.3] |
| KEY: | | (2*A/3)-10 1/4" (2*A/3)-[260.4] | A-13 1/2" A-[342.9] | (A/3)+ 1/2" (A/3)+[12.7] | A+1/2" A+[12.7] |

CONSULT FACTORY FOR ALL CUSTOM CONFIGURATION SIZES OR SIZES OVER 12'.

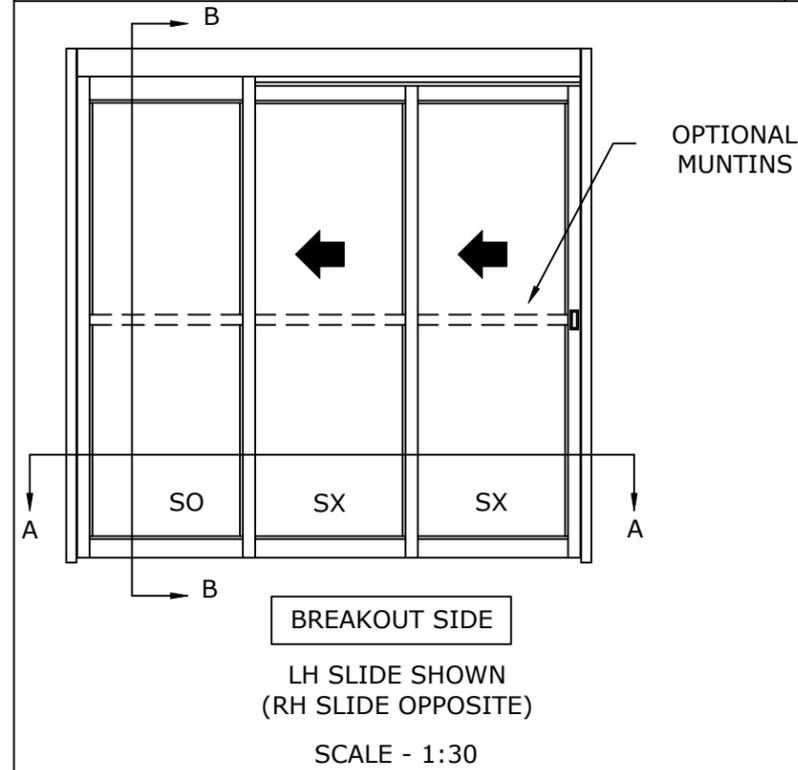

• DOORS WILL ONLY BREAK OUT WHEN IN THE FULLY OPEN POSITION.

FINISHED FLOOR MUST NOT BE AN INCREASE IN ELEVATION THROUGH BREAKOUT DOOR(S) PATH

REFER TO RELEVANT [LOCAL, STATE, NATIONAL, OR AHJ] BUILDING CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE.

| | |
|---------|----------|
| DWG NO. | 1016213 |
| DRN BY | DBN |
| DATE | 10/16/18 |
| CHK BY | CLW |
| DATE | 10/16/18 |
| REV. | 4.0 |
| DATE | 01/19/22 |

- NOTES:**
- STANDARD PACKAGE CONSISTS OF:
- STANDARD FINISH: CLASS 1, .018MM, CLEAR- AA-M12C22A41
 - NARROW STILE RAILS
 - 1/4" GLASS STOPS AND BLOCKS
 - PULL HANDLE(S) AND RECESSED FINGER PULL(S)
 - NURSE ASSIST MAGNETIC CATCHES
 - FULL OPENING DAMPENING DEVICE
- OPTIONS AVAILABLE:
- SPECIAL FINISHES
 - PACKAGE WILL ACCEPT UP TO 1 1/4" [31.8] INSULATED GLASS, SEE SHEET AA-13 FOR DETAILS
 - 7" & 10" BOTTOM RAILS, SEE SHEET AA-14 FOR DETAILS
 - MUNTINS, SEE SHEET AA-14 FOR DETAILS
 - SEE SHEET OS-1 FOR ALL OTHER OPTIONS.

FINISHED FLOOR MUST NOT BE CONCAVE ACROSS THE CLEAR DOOR OPENING AND NOT OUT OF LEVEL MORE THAN 1/8"

