

Free Passage = (W) 128 128 60 Cladding Heatertape PU Panel Wall Door Width = (W) + 110Floor camber = (W) + 400

SECTION A-A

Note:

- 1) Number of sheet joints on door leaf may change as it depends upon door size.
- 2) Cutout preparation will be in customer scope.
- 3) Finished floor level is required (Customer scope).
- 4) Floor Camber and filling after sill installation will be in customer scope.
- 5) Power Supply (Customer Scope)-Single-Phase,230v,50-60Hz with earthing. Load = 1.0 Kw.

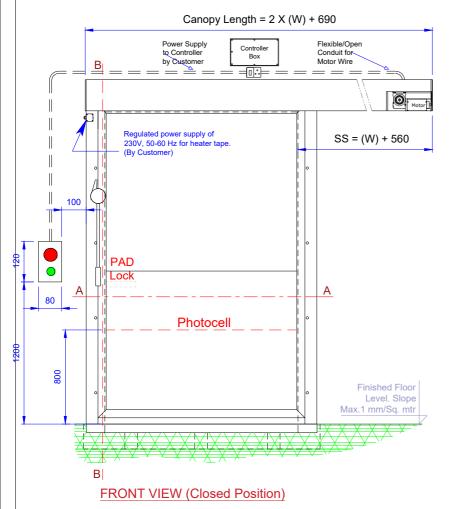

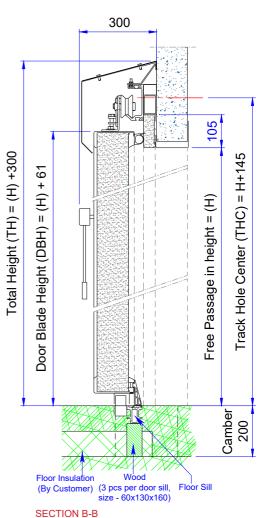

Format:

A4



METAFLEX DOORS INDIA PVT. LTD 8-A, Part I & II, Udyog Vihar, Greater Noida-201306, U.P., INDIA. Phone:- 0120-4751000 www.metaflexdoors.in

Projection	Drawn	S.K.	Chkd	N.K.	Proj. nr.
	Date	31-10-2025	Ch.date	31-10-2025	STANDARD
	Scale	NTS	Tol.		GA DWG. OF MF5A
NC-File	Dim.	mm	Art.nr.	XXXXX	5. 1
SheetM.	Dep.	Projects_Design	Config	RIGHT	05
Finish					Sheet 1 of 1

This drawing contains confidential information and is the property of Metaflex Doors India Pvt. Ltd. Without whose permission it may not be copied, shown or handed to a third party or otherwise used

Description	MF5 AUTOMATIC DOOR ON PU PANEL WALL					
Title	MF5	Drawing no. MF5A-PR	Rev. 00			