
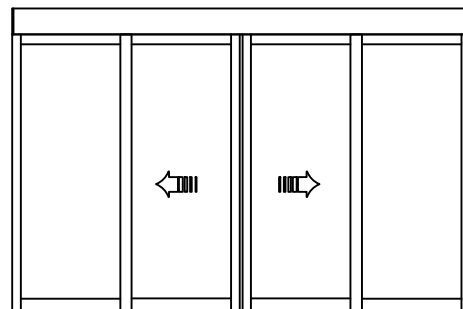
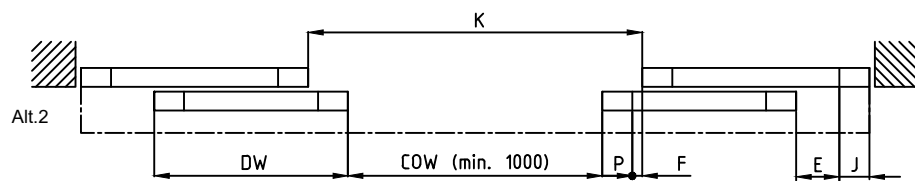
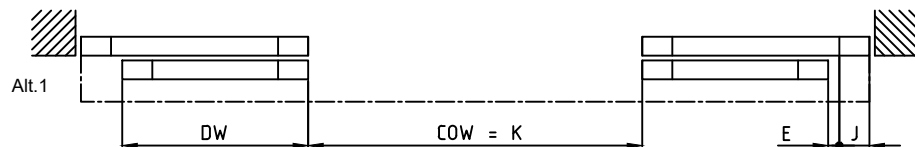


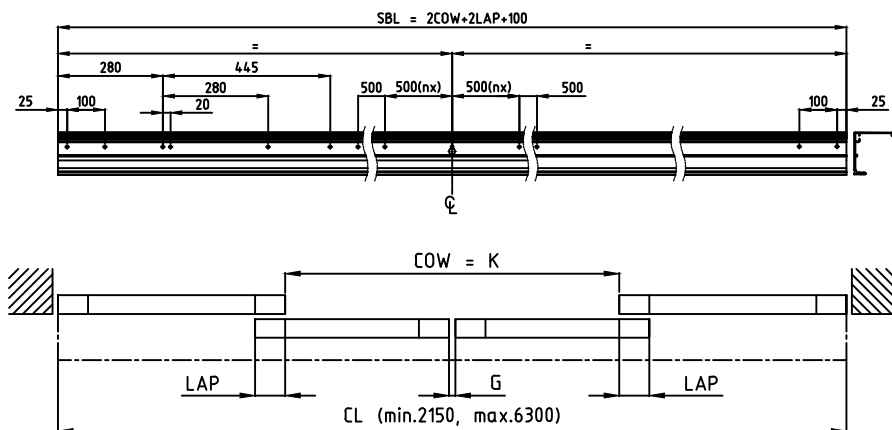

STATE WHEN ORDERING

COW = mm
CL = mm
SBL = mm
LAP = mm
G = mm
DW = mm
Door weight= kg

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

	Alt. 1	Alt. 2	
Overlap (min. 20mm)	LAP	LAP	 x2 =
Finger protection (min. 25mm)	E	E	 x2 =
Finger protection (min. 25mm)	-	F	 x2 =
Jamb width (min. 30mm)	J	J	 x2 =
Leading edge width	-	P	 x2 =
Sum of above			Sum =

Alt.1 COW = K	K=	(K + 2LAP - G) / 2 = DW	DW =
Alt.2 COW + 2P + 2F = K	K=		DW =

Cover length CL	(CL - Sum) / 2 = = COW max.
Door travel COW	(COW x2) + Sum = = CL min.

Customer:
Door id:
Project No:

Ref: _____

Date: _____

Sign: _____

Sliding door operator
ASSA ABLOY SL500-2
Art. No. 1008568

ASSA ABLOY

6.0 1010709-en