

Slide open to the right

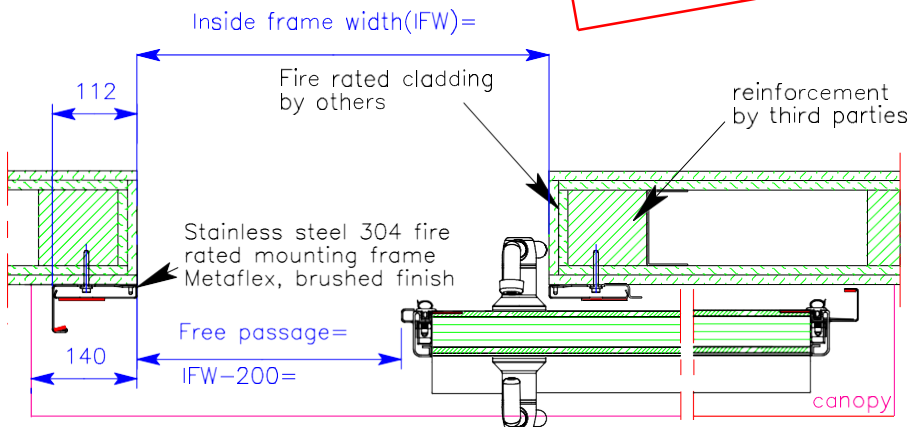
Door no: —

Quantity: 1 p.

Approved by:

Initials:

Date:



#### Remarks:



- Current:** 230V / 50Hz socket 1P+1N+RA (by others)
- Conduits:** 5/8" conduits for electrical wiring (by others)
- Wiring:** 4 x 0,34 mm<sup>2</sup>, shielded cables, 2m overlength (by others)
- Isolators:** For current, switches and safeties delivered and mounted by others.
- Floor:** —Floor must be level.  
—No corner profile in sliding space

A: Switches  
B: Socket (current)  
C: Optional functions

- \* 60 minutes fire rated door EI1
- \* Window: No
- \* Switches: not provided
- \* Safety: 2 p. infra-red safetysensors.
- \* UPS: not provided



Metaflex Doors Europe BV  
Ambachtsstraat 11  
NL-7122 MP Aalten  
The Netherlands  
T +31 88 1414 900  
info@metaflexdoors.com  
www.metaflexdoors.com

Rev.:	Modification:	Date:	Drawn:	Checked:
<div>Projektion</div> <div></div>	Scale: nvt	Drawn: RW	Work:  —  —	
	Dimension: mm	Checked: —		
	Date: 28-02-2023	Project: —		
	We explicitly reserve all rights regarding our designs, drawings and other products, as well as intellectual property rights if applicable.			
Discription: Medicare EI1 60 2.0, SDA04				Size:
Belongs to:		Drg.no.:	rev. 00	A4