
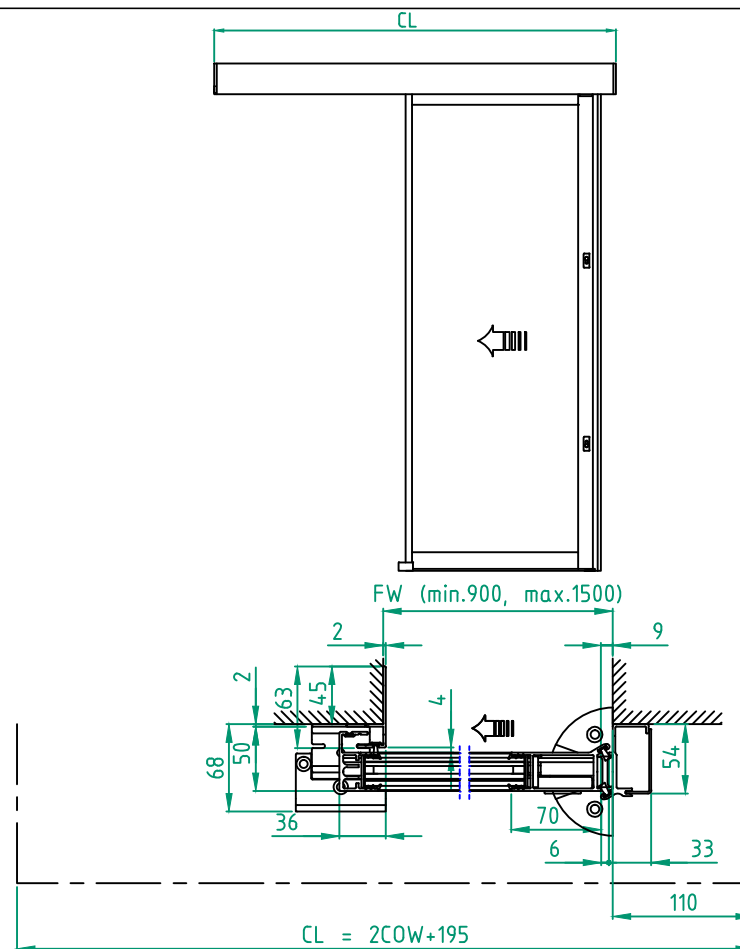
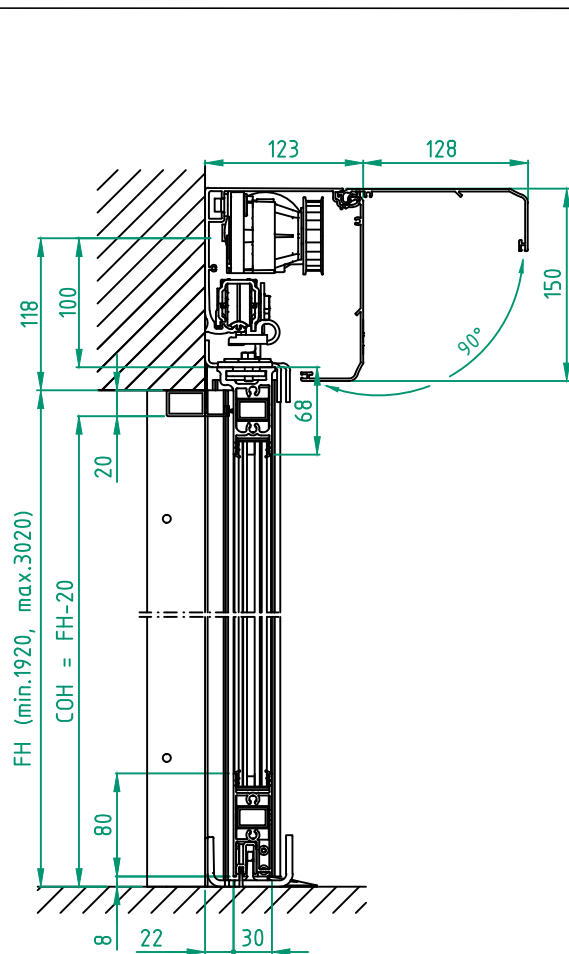


OPEN DOOR, ONE-WAY CYLINDER

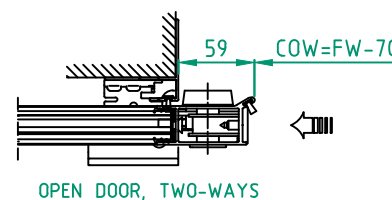

OPEN DOOR, TWO-WAYS

STATE WHEN ORDERING

FW = mm
FH = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Options see layers:

☐ Alternative F (concrete/brick)
☐ Alternative U (aluminium/steel)

Glass option see drw. 1009030

Glass code:

Installation

☐ Floor heating
☐ Other

Note!

Cylinder ordered separately.
If other cylinder than 1700614 is
used for two-ways locking, it
must have following classification
according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41

Cylinder length:

One-way 27/9 mm
Two-ways 27/27 mm

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Automatic door system
ASSA ABLOY Slim Eco RC2 1 Panel wall mounted left opening
Art. No. 1015771-1PS-15
ASSA ABLOY SL500

ASSA ABLOY

5.0

1015771-en

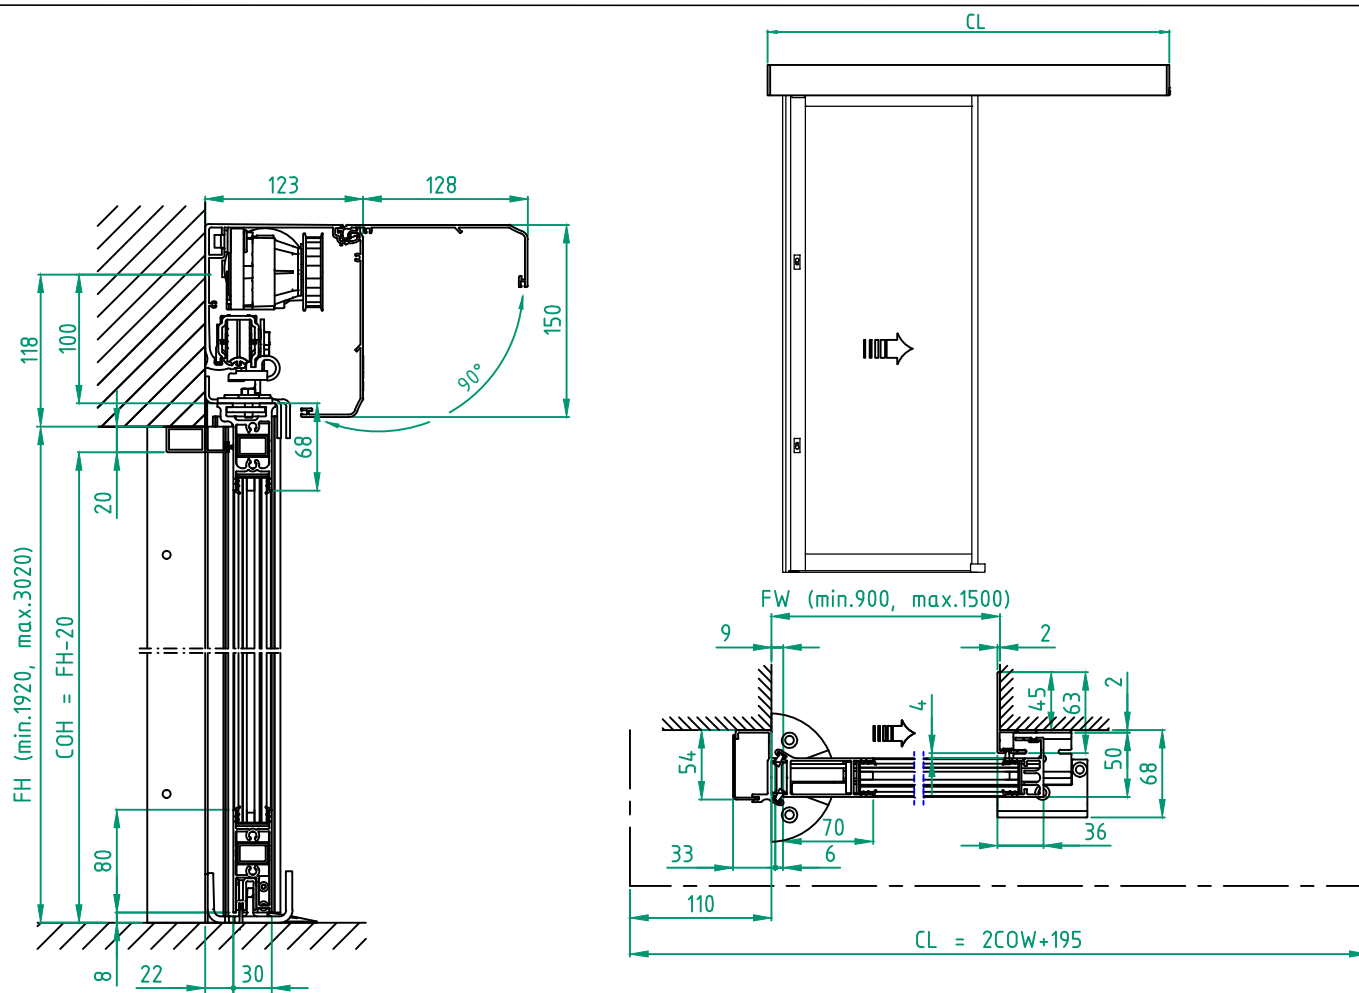

STATE WHEN ORDERING

FW = mm
FH = mm
COW = mm
COH = mm
CL = mm

Surface treatment
☐ Silver anodized
☐ Special anodized
RAL
Special powder coating
.....

Options see layers:
☐ Alternative F (concrete/brick)
☐ Alternative U (aluminium/steel)

Glass option see drw. 1009030
Glass code:
.....

Installation
☐ Floor heating
☐ Other
.....

Note!
Cylinder ordered separately.
If other cylinder than 1700614 is
used for two-ways locking, it
must have following classification
according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41


Cylinder length:
One-way 27/9 mm
Two-ways 27/27 mm

Customer:	Ref:
Door id:	Date:
Project No:	Sign:

Automatic door system
ASSA ABLOY Slim Eco RC2 1 Panel wall mounted right opening
Art. No. 1015771-1PS-15
ASSA ABLOY SL500

ASSA ABLOY

5.01015771-en

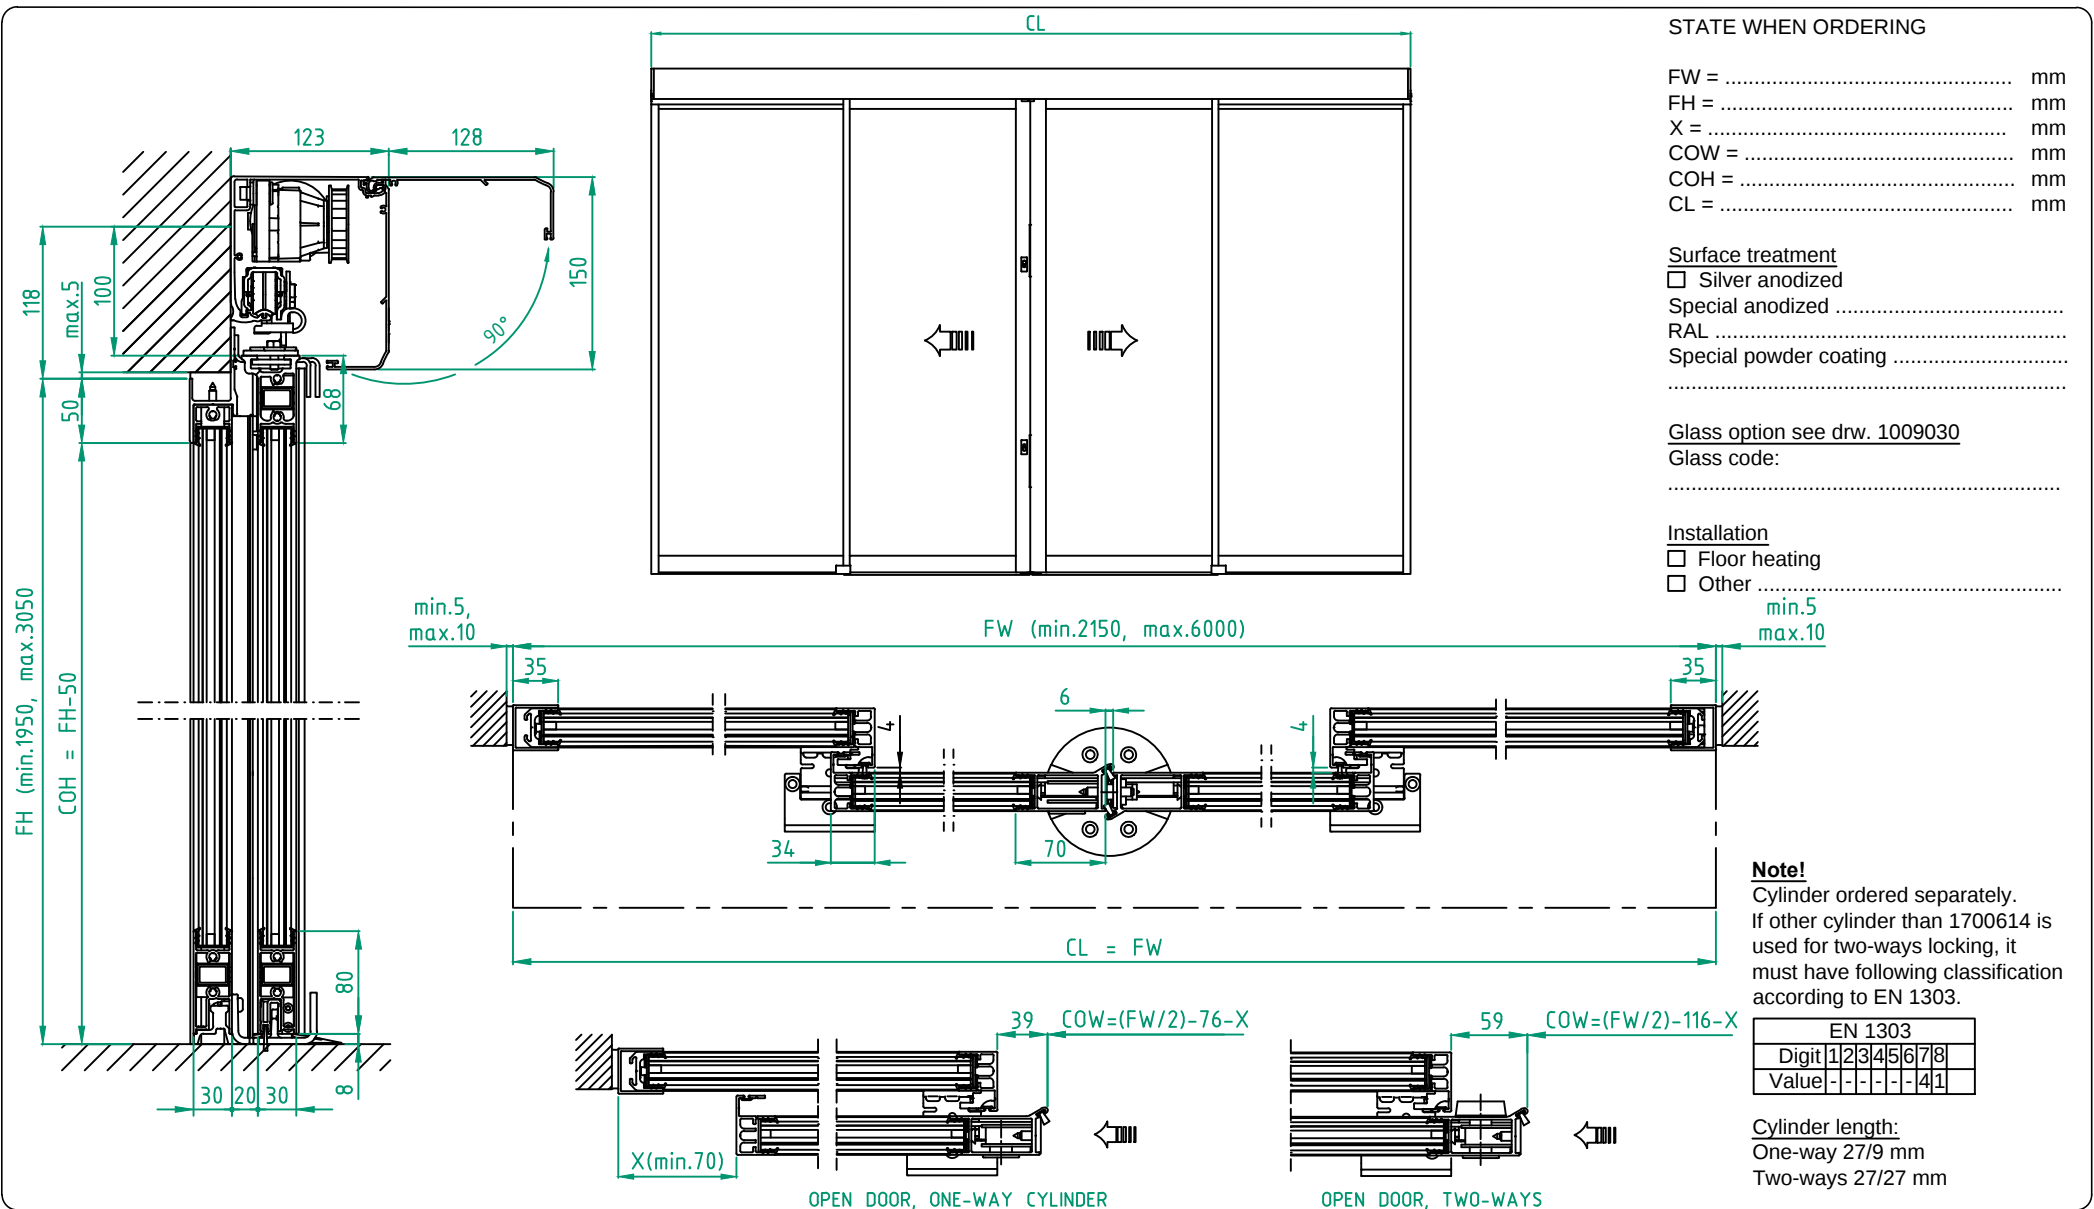

Customer:

Door id:

Project No:

(Ref:

(Date:

(Sign:

Automatic door system
ASSA ABLOY Slim Eco RC2 4 Panel wall mounted bipart
Art. No. 1015771-4PB-15
ASSA ABLOY SL500

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Glass option see drw. 1009030

Glass code:

Installation

☐ Floor heating
☐ Other


Note!

Cylinder ordered separately.
If other cylinder than 1700614 is used for two-ways locking, it must have following classification according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41

Cylinder length:

One-way 27/9 mm
Two-ways 27/27 mm

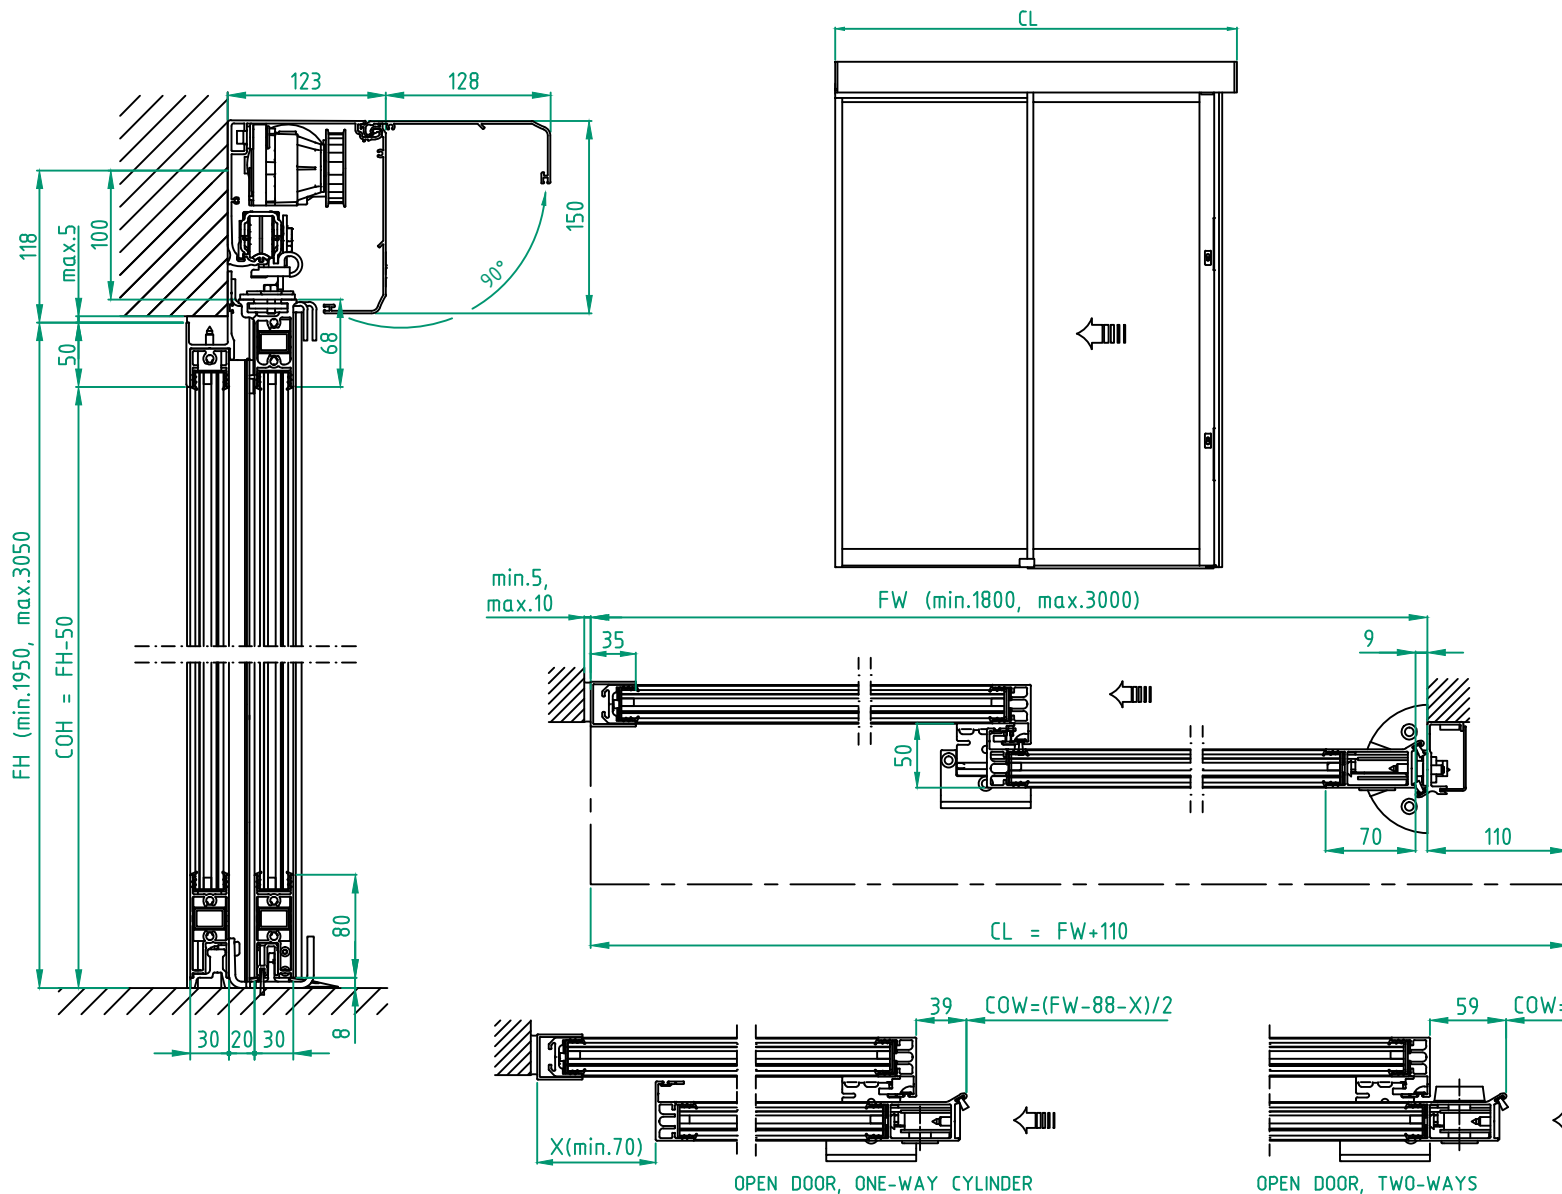

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Glass option see drw. 1009030

Glass code:
.....

Installation

☐ Floor heating
☐ Other

Note!

Cylinder ordered separately.
If other cylinder than 1700614 is used for two-ways locking, it must have following classification according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41


Cylinder length:

One-way 27/9 mm
Two-ways 27/27 mm

Customer:	Ref:	Automatic door system ASSA ABLOY Slim Eco RC2 2 Panel wall mounted left opening Art. No. 1015771-2PS-15 ASSA ABLOY SL500
Door id:	Date:	
Project No:	Sign:	

ASSA ABLOY

5.0 1015771-en

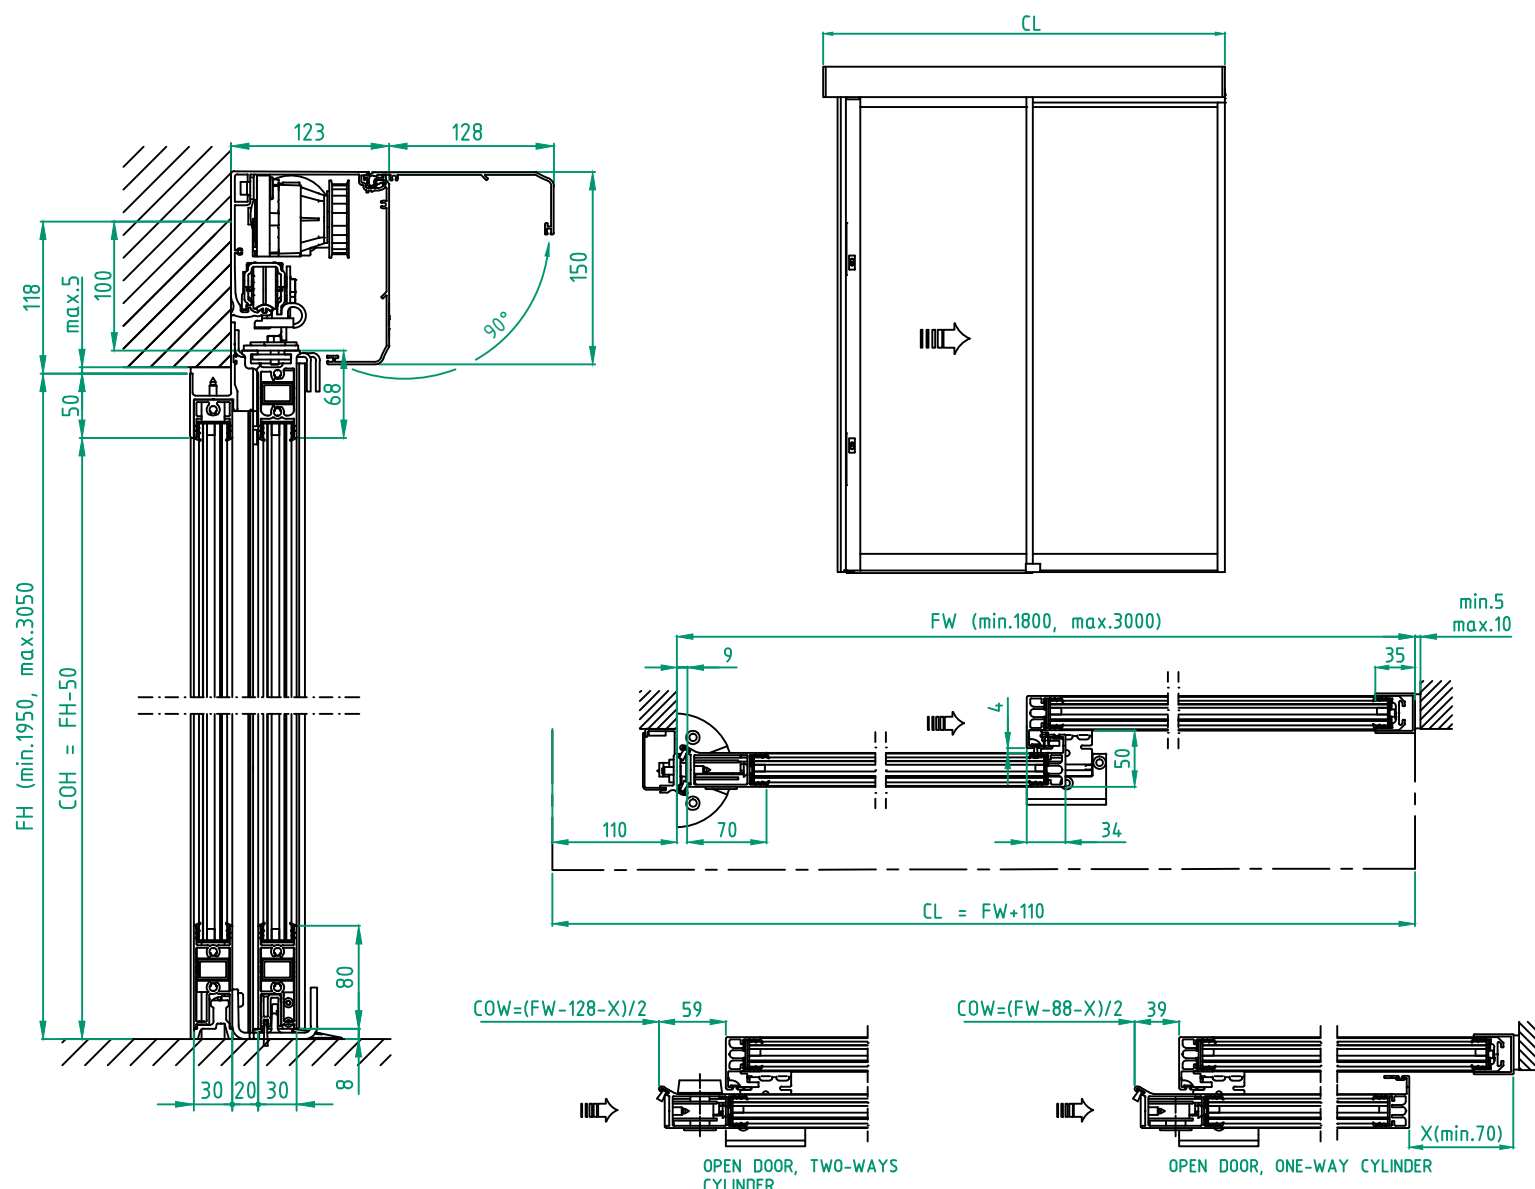

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Glass option see drw. 1009030

Glass code:
.....

Installation

☐ Floor heating
☐ Other
.....

Note!

Cylinder ordered separately.
If other cylinder than 1700614 is
used for two-ways locking, it
must have following classification
according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41

Cylinder length:

One-way 27/9 mm
Two-ways 27/27 mm

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Automatic door system
ASSA ABLOY Slim Eco RC2 2 Panel wall mounted right opening
Art. No. 1015771-2PS-15
ASSA ABLOY SL500

ASSA ABLOY

5.0

1015771-en

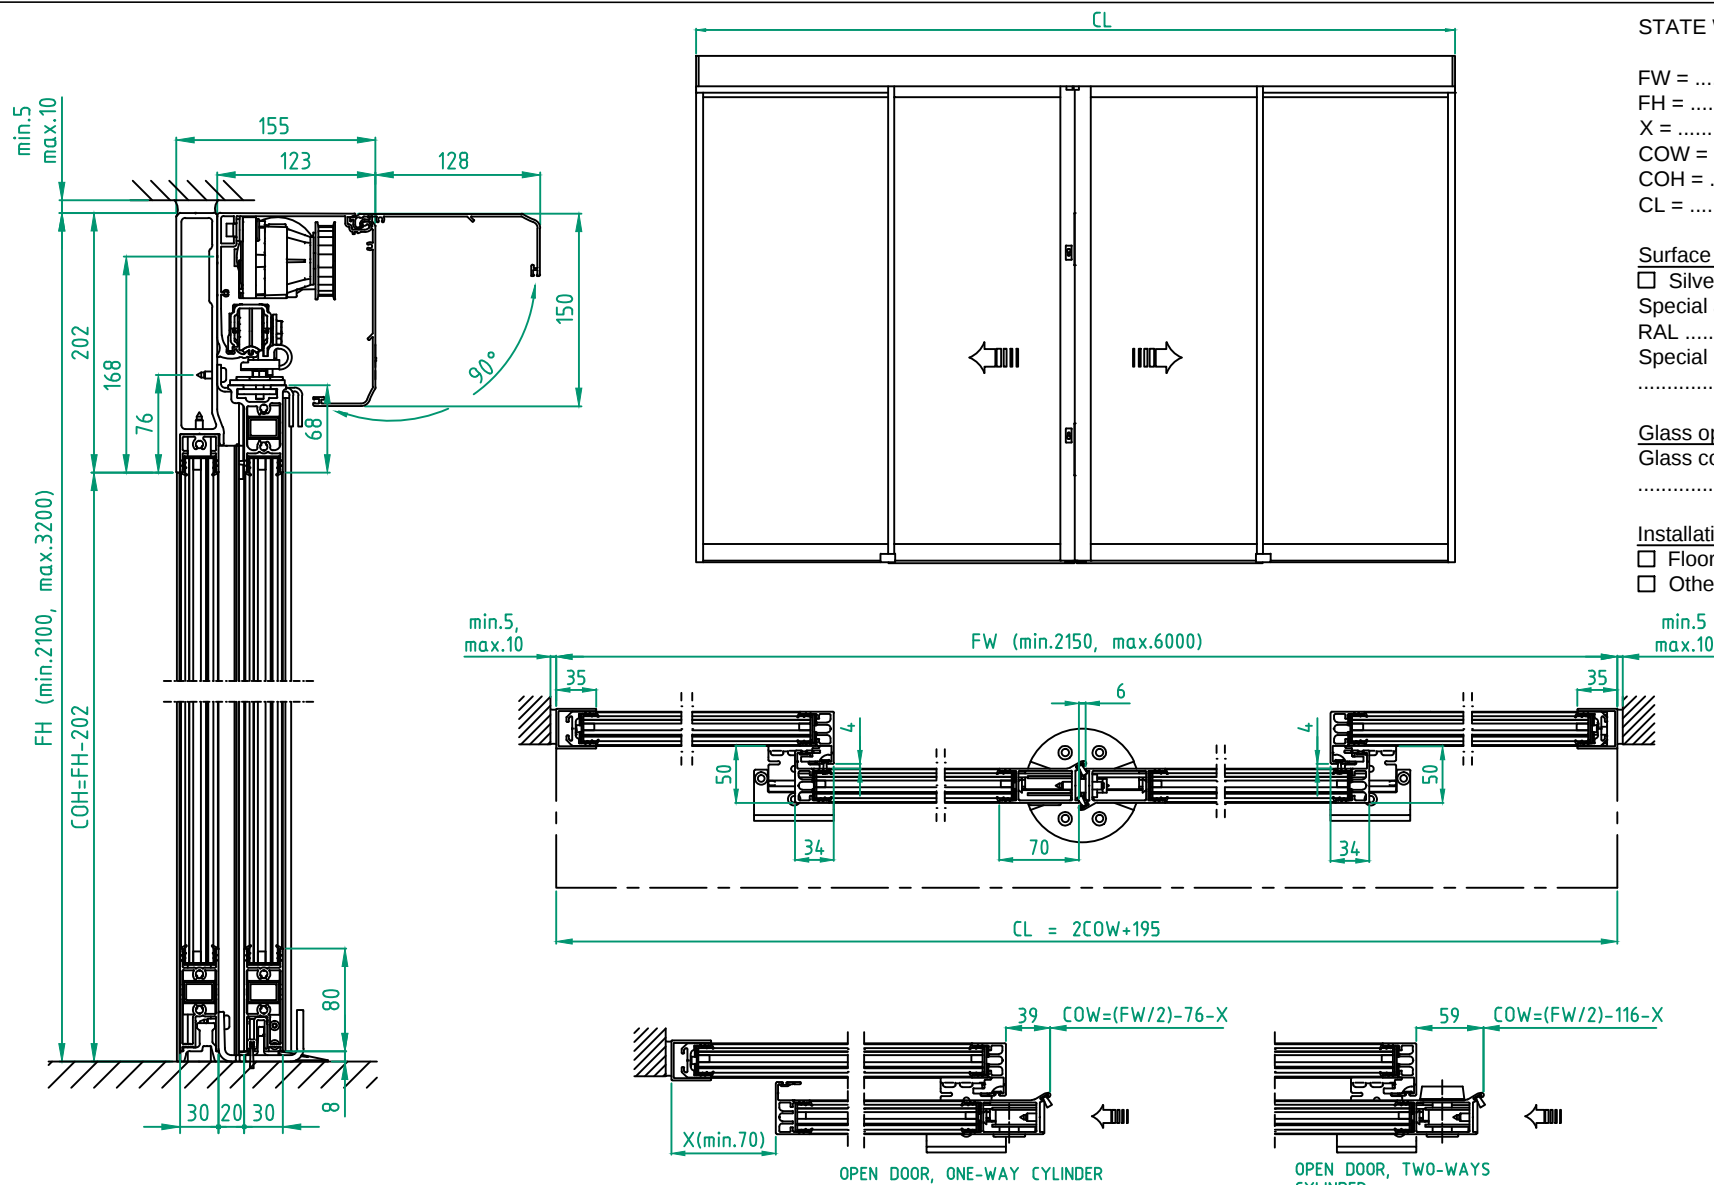

STATE WHEN ORDERING

FW = mm
 FH = mm
 X = mm
 COW = mm
 COH = mm
 CL = mm

Surface treatment

☐ Silver anodized
 Special anodized
 RAL
 Special powder coating

Glass option see drw. 1009030

Glass code:

Installation

☐ Floor heating
☐ Other

Note!

Cylinder ordered separately.
 If other cylinder than 1700614 is used for two-ways locking, it must have following classification according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41

Cylinder length:

One-way 27/9 mm
 Two-ways 27/27 mm

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Automatic door system
 ASSA ABLOY Slim Eco RC2 4 Panel beam mounted bipart
 Art. No. 1015771-4PB-15
 ASSA ABLOY SL500

ASSA ABLOY

5.0

1015771-en

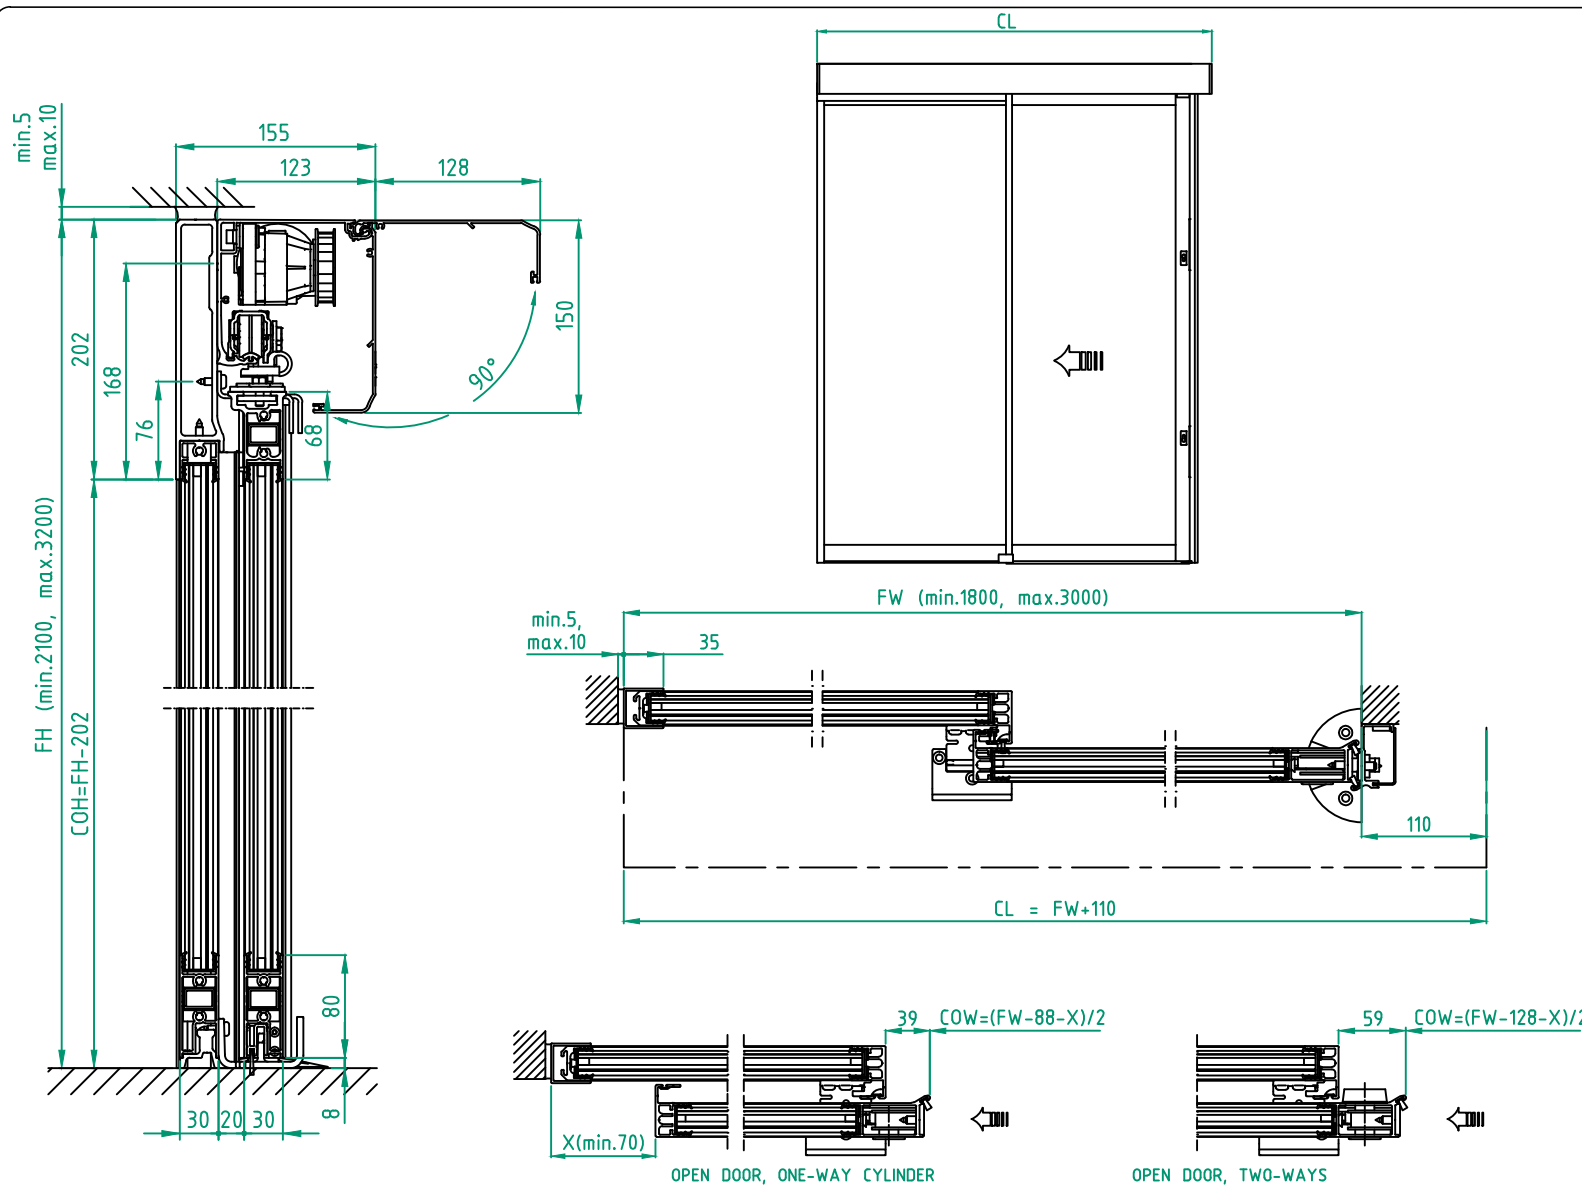

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

Glass option see drw. 1009030

Glass code: _____

Installation

☐ Floor heating

☐ Other

Note!

Cylinder ordered separately.
If other cylinder than 1700614 is
used for two-ways locking, it
must have following classification
according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41

Cylinder length:

One-way 27/9 mm

Two-ways 27/27 mm

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Automatic door system
ASSA ABLOY Slim Eco RC2 2 Panel beam mounted left opening
Art. No. 1015771-2PS-15
ASSA ABLOY SL500

ASSA ABLOY

5.0

1015771-en

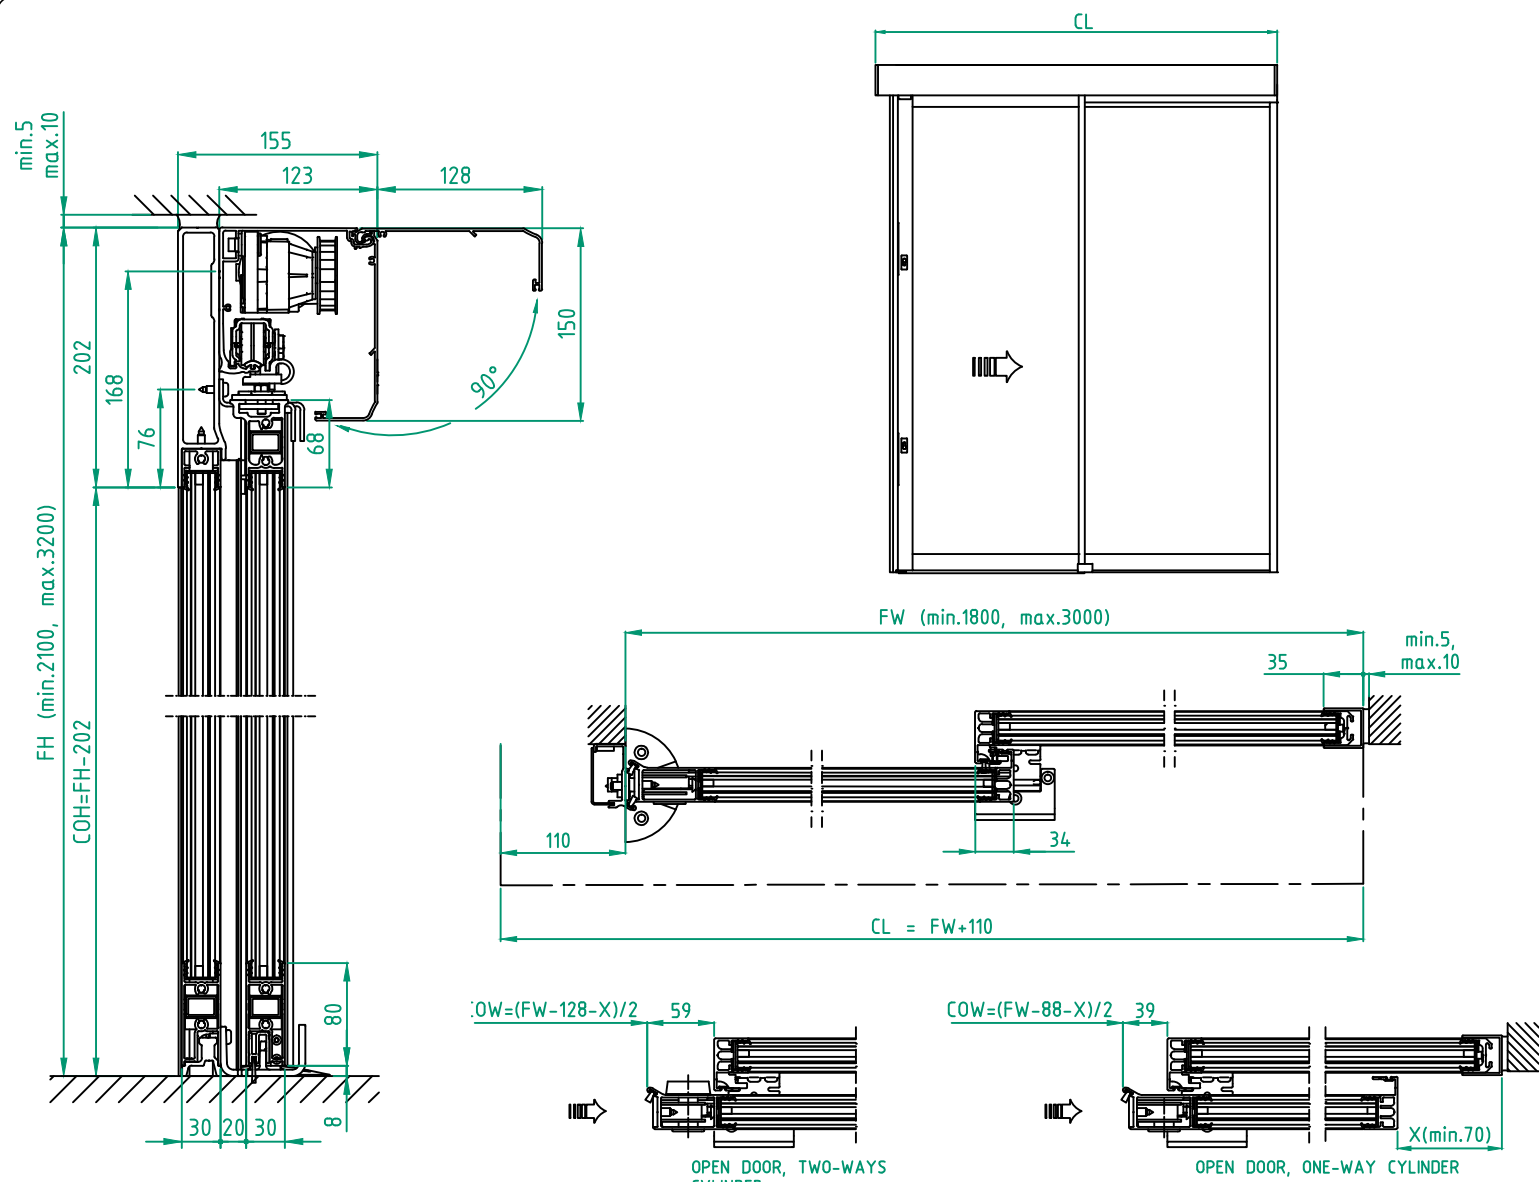

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment
☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Glass option see drw. 1009030
Glass code:
.....

Installation
☐ Floor heating
☐ Other
.....

Note!
Cylinder ordered separately.
If other cylinder than 1700614 is
used for two-ways locking, it
must have following classification
according to EN 1303.

EN 1303							
Digit	1	2	3	4	5	6	7
Value	-	-	-	-	-	-	41

Cylinder length:
One-way 27/9 mm
Two-ways 27/27 mm

Customer: _____

Door id: _____

Project No: _____

Ref: _____

Date: _____

Sign: _____

Automatic door system
ASSA ABLOY ☐ Slim Eco RC2 2 Panel beam mounted right opening
Art. No. 1015771-2PS-15
ASSA ABLOY SL500

ASSA ABLOY

5.0 1015771-en