

Docking equipment

ASSA ABLOY DE6090FL

ASSA ABLOY
Entrance Systems

Experience a safer
and more open world



Safety and comfort for the loading operation

The ASSA ABLOY DE6090FL Fan Light is a unique and innovative product from ASSA ABLOY Entrance Systems. This exclusive two in ONE product is a convenient, safe and sustainable help when working in and around the docking area. It has a modern, solid and reliable design, and is truly user friendly.

The compact ASSA ABLOY DE6090FL Fan Light is a combined solution of a fan and a dock light in one system. The fan creates a continuous stream of fresh air that refreshes and cleans the air inside the trailer or container and the integrated dock light provides extensive light. It has a flexible solid arm that fits general industry and logistics applications, for an easy and fast docking process. The ASSA ABLOY DE6090FL Fan Light is equipped with two on-off buttons, one for each function: fan and light. Due to the lightweight it is easy to operate and the low noise level of the fan contributes to a safe and secure work place.


Benefits

- Two in ONE product, fan with integrated dock light to create better working conditions for staff and avoid damages to the equipment, the goods, on the vehicle or the building.
- Powerful fan to have fresh air instead of cold, hot or moisty air for improved work environment.
- Bright and sufficient light in the truck and docking area thanks to powerful illumination.
- Energy efficient fan and LED-lamps. Low energy consumption, long lasting lifetime and low operational cost.
- Flexible solid arm that fits every application, for an easy and fast docking process.
- Lightweight, small size and low space requirement for easy installation and operation.
- Very low noise level for a safe and secure work place.
- Modern and solid design. User friendly with no special training needed for operation.


Technical Data

Power Supply	230 V AC / 50Hz
Cable	Length 2 m with plug
Total weight	9 kg
Fan	
Max. airflow rate	355 m ³ /h
Max. air temperature	60 °C
Air pressure max.	90Pa
Power input	0,1 kW
Protection class	IP22
Sound level (3m distance)	61,5 dB(A)
Dock Light LED	
Watt	20W
Light temperature	5000K
Lumens of light	2565
Life time	More than 50.000 hours in typical applications
Protection Class	IP66

Installation

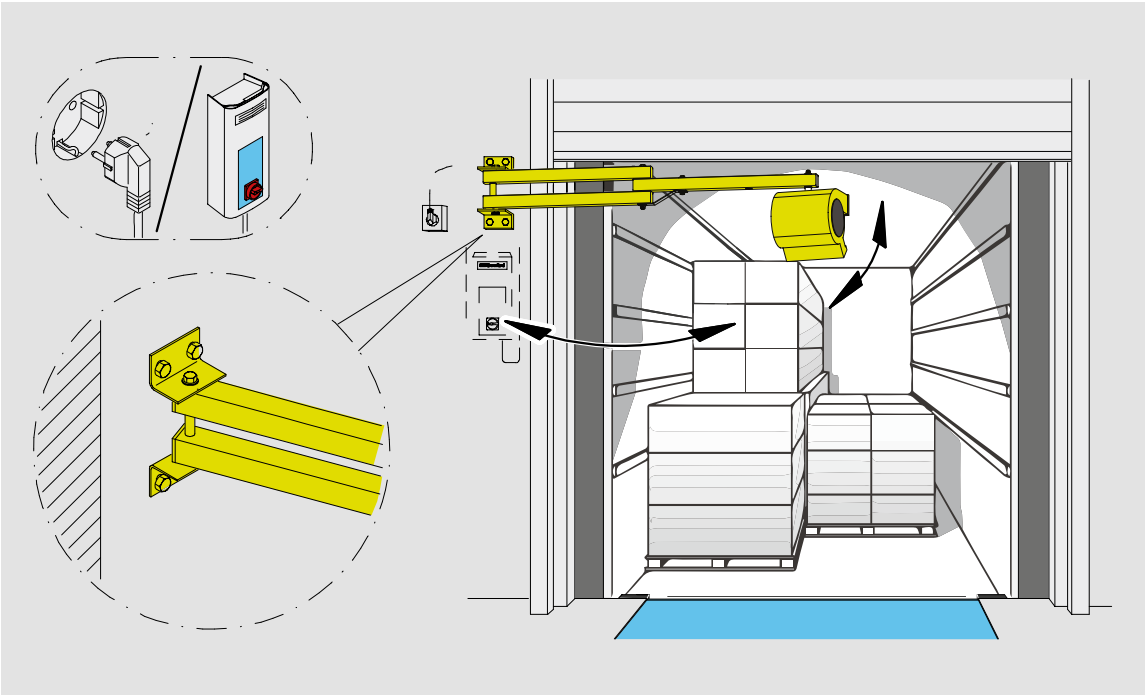

Side view

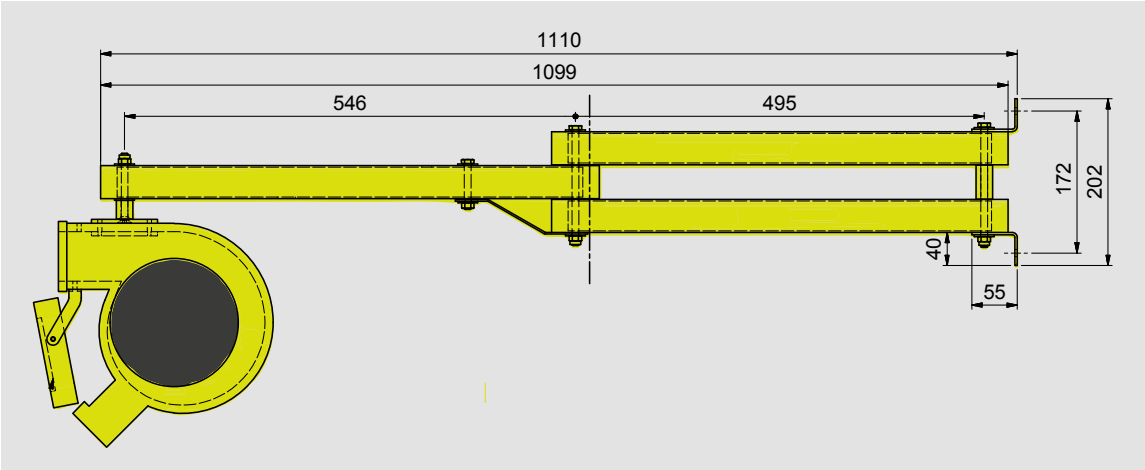

Top view

