


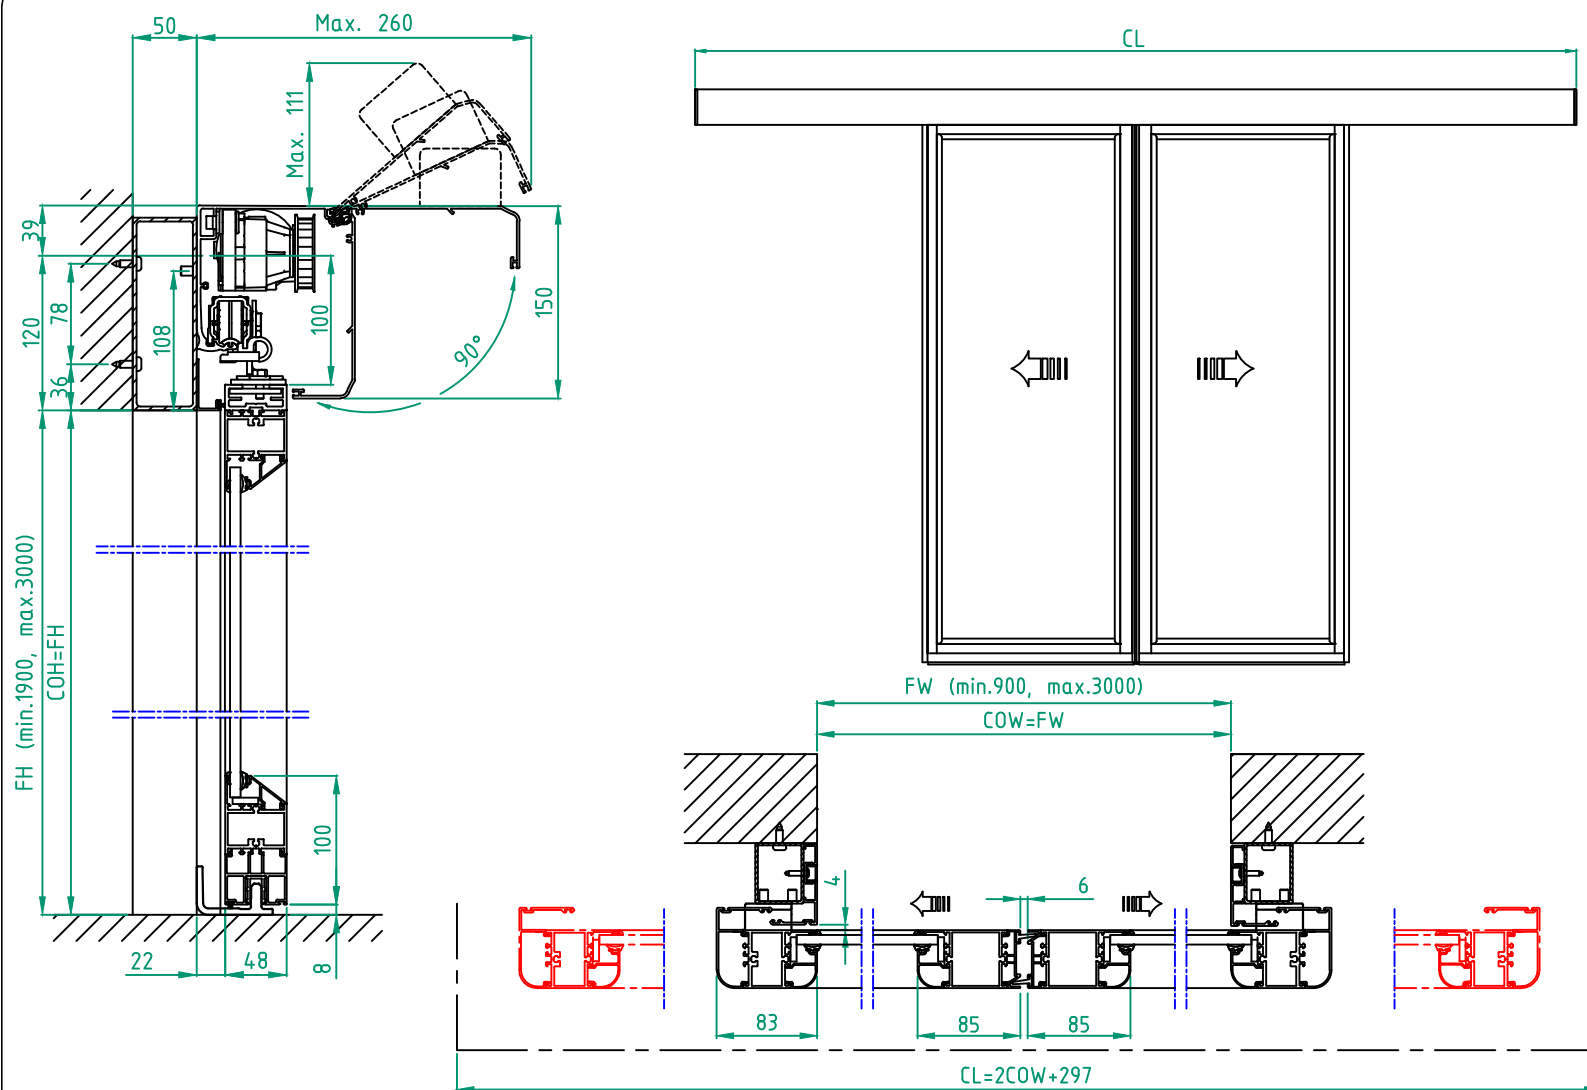

STATE WHEN ORDERING

FW = mm
 FH = mm
 COW = mm
 COW with ASSA = COW-154 = mm
 COH = mm
 CL = mm

Surface treatment

☐ Silver anodized
☐ Special anodized
 RAL
☐ Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Frame Eco
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm
☐ Threshold floor guide, L = 2FW + 116
☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:



Project No:

Sign:

Automatic door system
 ASSA ABLOY Frame 2 Panel wall mounted bipart
 Art. No. 1009380-2PB-15
 ASSA ABLOY SL500

ASSA ABLOY

8.0 1009380-LTE

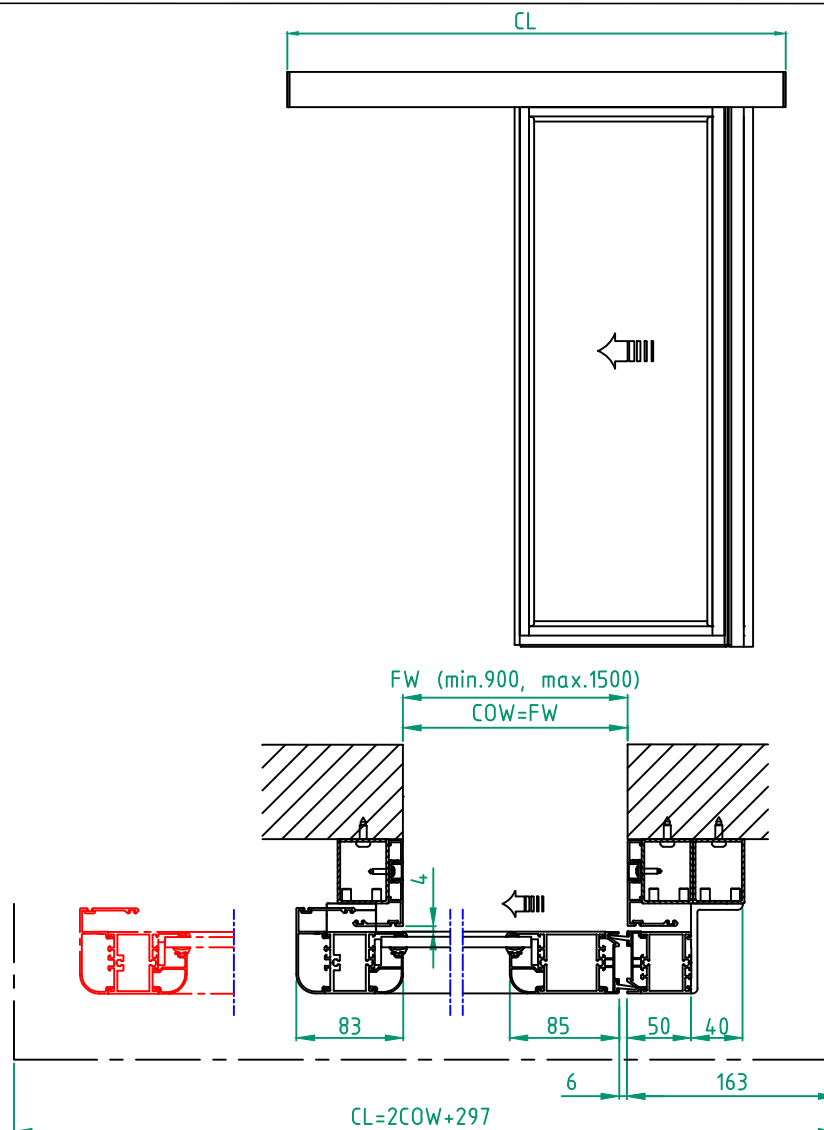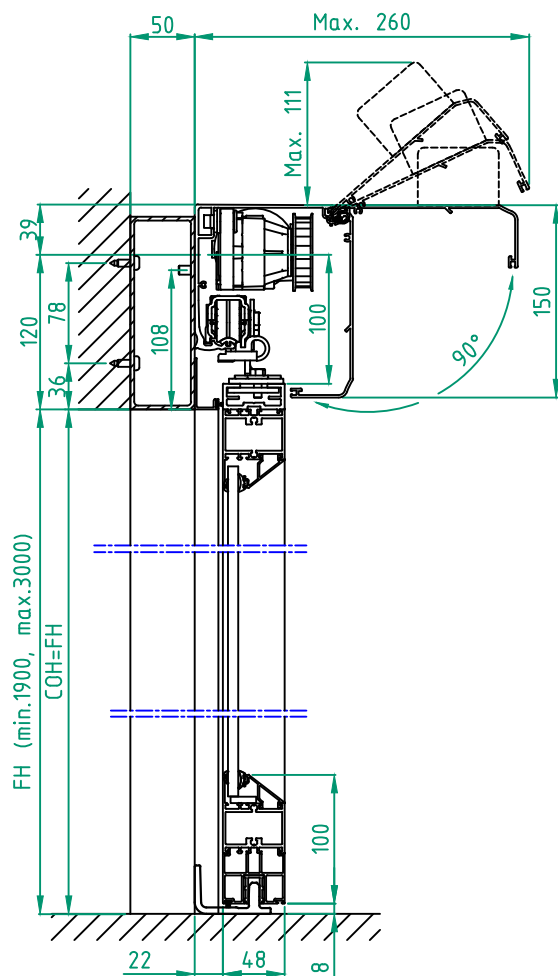

STATE WHEN ORDERING

FW = mm
 FH = mm
 COW = mm
 COW with ASSA = COW-77 = mm
 COH = mm
 CL = mm

Surface treatment

☐ Silver anodized
☐ Special anodized
 RAL
☐ Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Frame Eco
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm
☐ Threshold floor guide, L = 2FW + 44
☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:



Project No:

Sign:

Automatic door system
 ASSA ABLOY Frame 1 Panel wall mounted opening left
 Art. No. 1009380-1PS-15
 ASSA ABLOY SL500

ASSA ABLOY

8.0 1009380-LTE

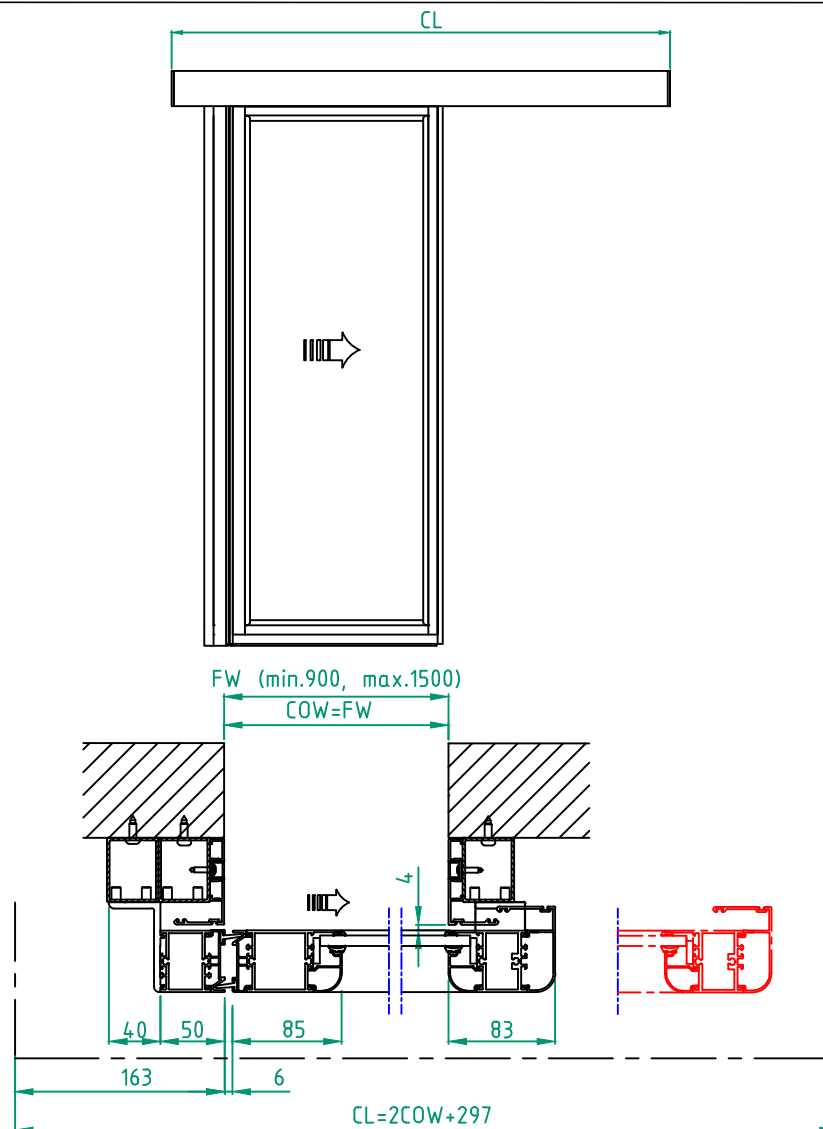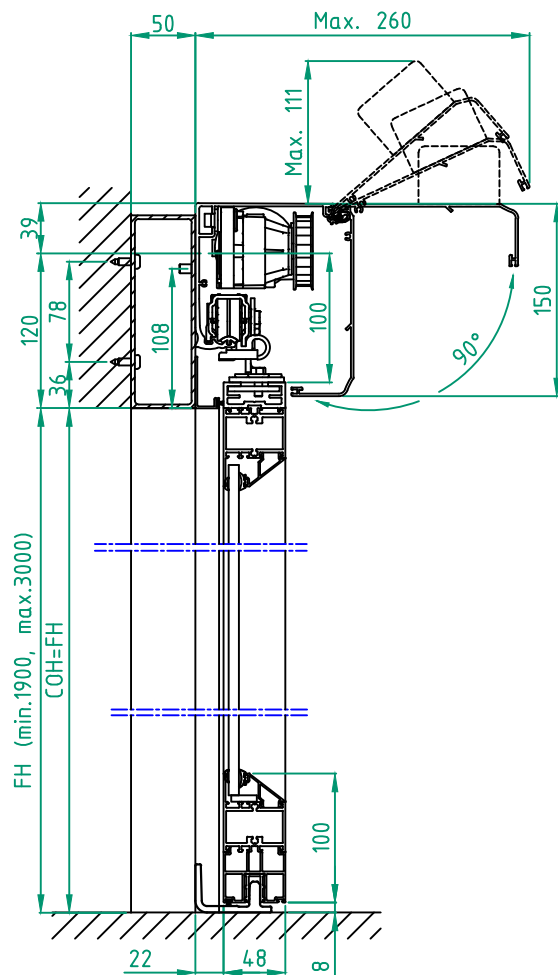

STATE WHEN ORDERING

FW = mm
 FH = mm
 COW = mm
 COW with ASSA = COW-77 = mm
 COH = mm
 CL = mm

Surface treatment

☐ Silver anodized
☐ Special anodized
 RAL
☐ Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Frame Eco
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm
☐ Threshold floor guide, L = 2FW + 44
☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:




Project No:

Sign:

Automatic door system
 ASSA ABLOY Frame 1 Panel wall mounted opening right
 Art. No. 1009380-1PS-15
 ASSA ABLOY SL500

ASSA ABLOY

8.0 1009380-LTE

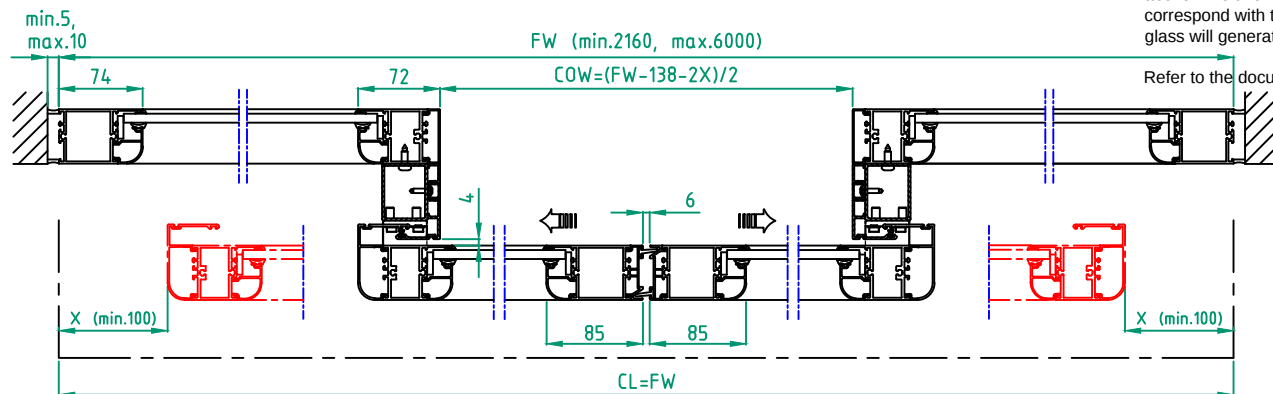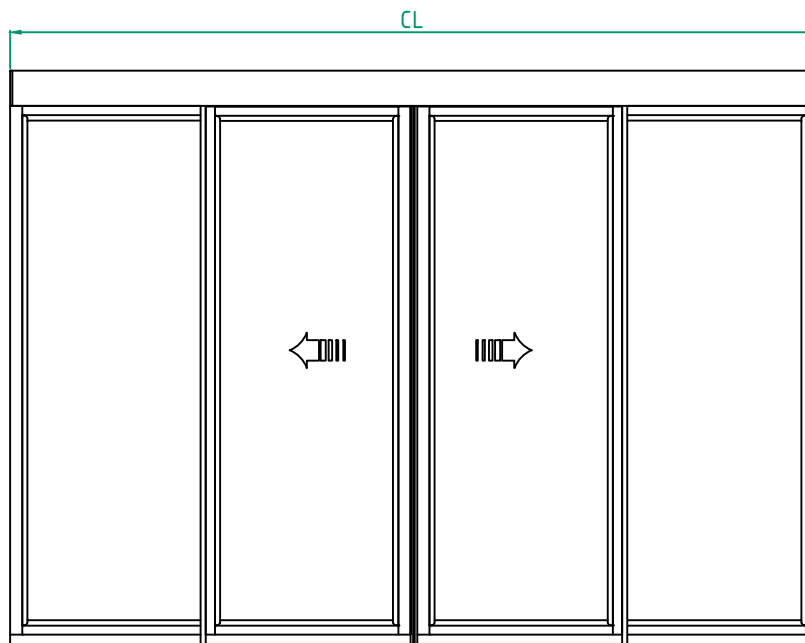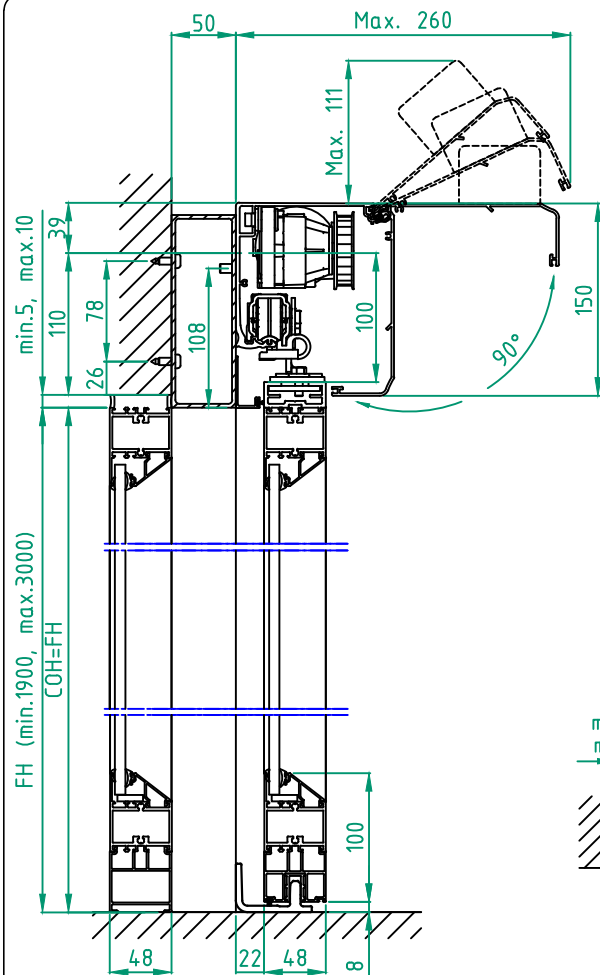

STATE WHEN ORDERING

FW = mm
 FH = mm
 X = mm
 COW = mm
 COW with ASSA = COW-154 = mm
 COH = mm
 CL = mm
 Surface treatment
☐ Silver anodized
 Special anodized
 RAL
 Special powder coating

Options see layers:

- ☐ Bottom rail 178
- ☐ Frame Eco
- ☐ Midrail 70, MH = mm
- ☐ Midrail 150, MH = mm
- ☐ Threshold floor guide, L = FW
- ☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Automatic door system
 ASSA ABLOY Frame 4 Panel wall mounted
 Art. No. 1009380-4PB-15
 ASSA ABLOY SL500



ASSA ABLOY

8.0

1009380-LTE

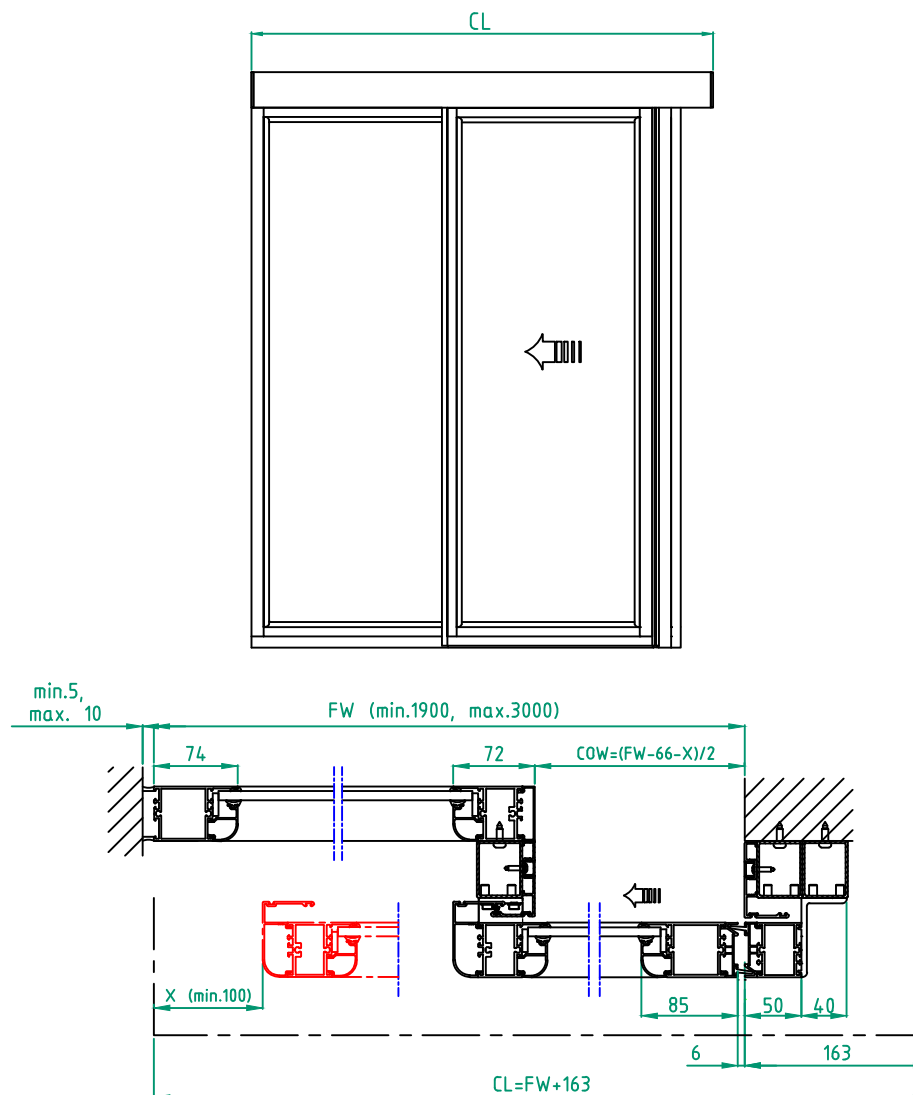

8.0 1009380-LTE

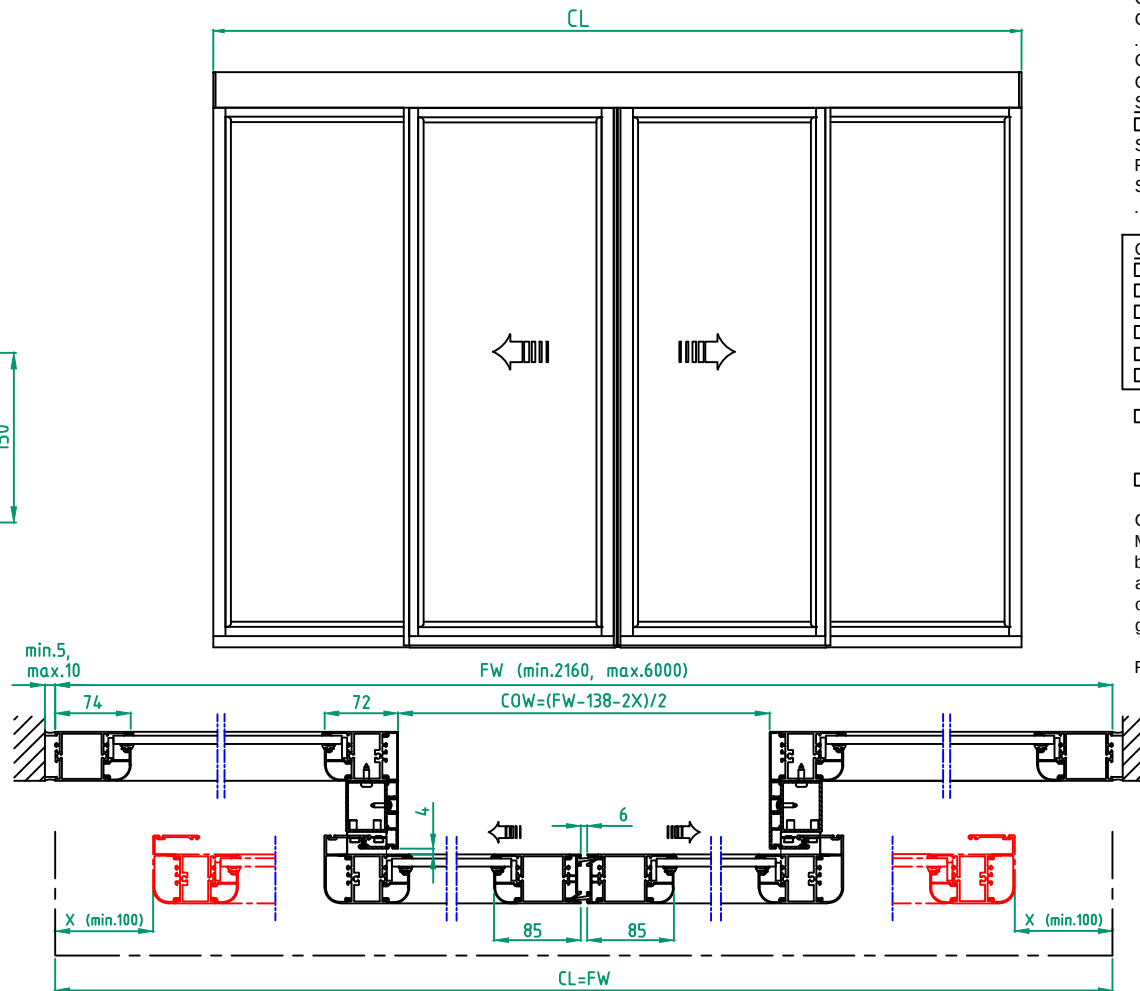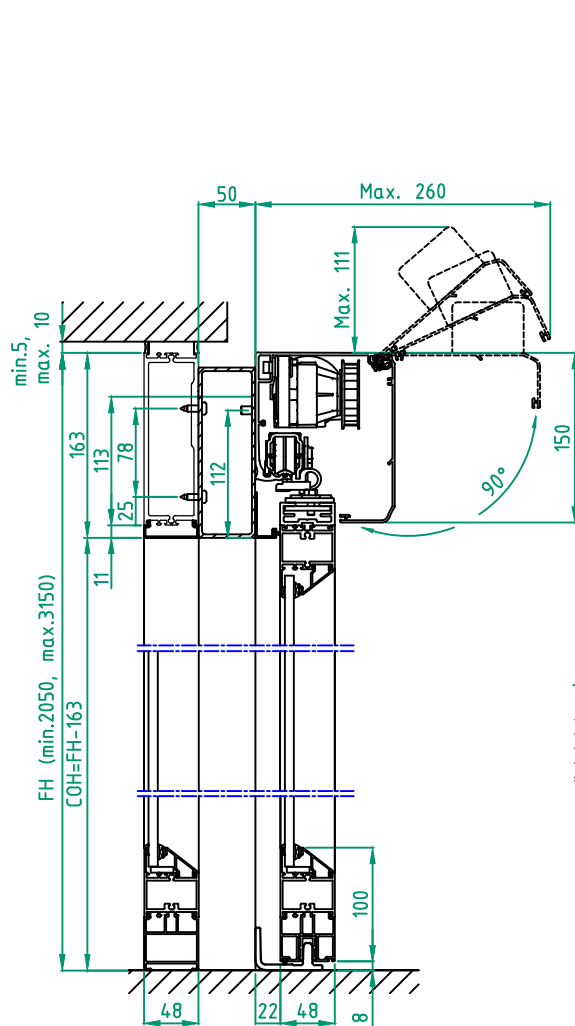

STATE WHEN ORDERING

FW = mm
 FH = mm
 X = mm
 COW = mm
 COW with ASSA = COW-154 = mm
 COH = mm
 CL = mm
 Surface treatment
☐ Silver anodized
☐ Special anodized
 RAL
 Special powder coating

Options see layers:

- ☐ Bottom rail 178
- ☐ Frame Eco
- ☐ Midrail 70, MH = mm
- ☐ Midrail 150, MH = mm
- ☐ Threshold floor guide, L = FW
- ☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:


Project No:

Sign:

Automatic door system
 ASSA ABLOY Frame 4 Panel beam mounted
 Art. No. 1009380-4PB-15
 ASSA ABLOY SL500

ASSA ABLOY

8.0 1009380-LTE

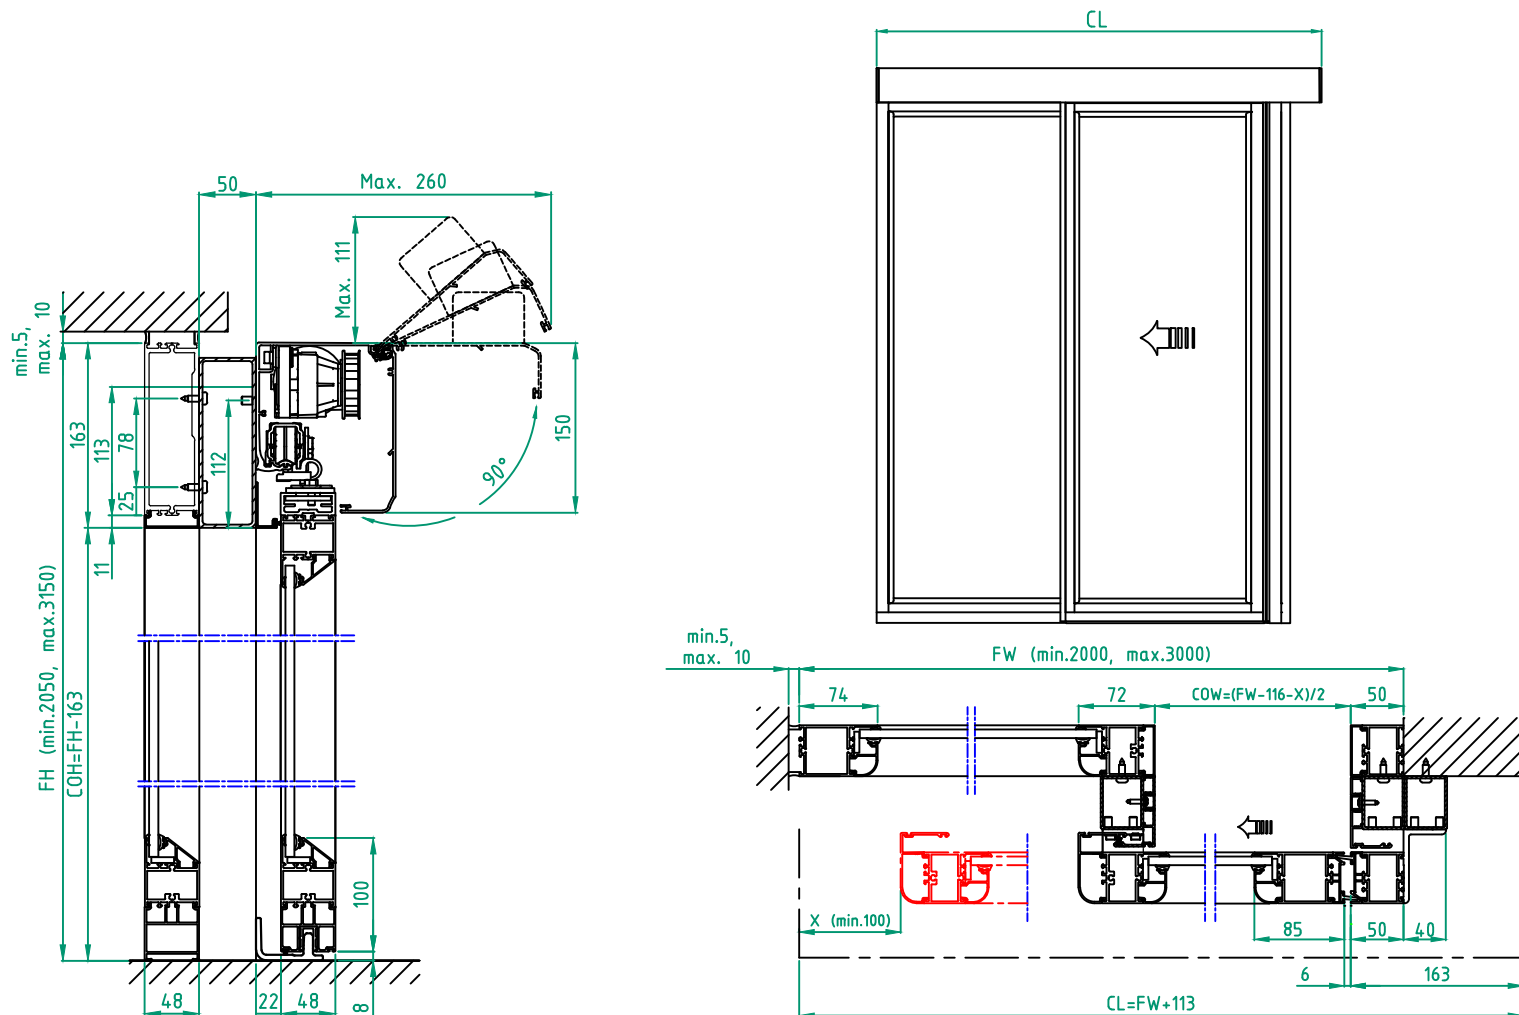

STATE WHEN ORDERING

FW = mm
 FH = mm
 X = mm
 COW = mm
 COW with ASSA = COW-77 = mm
 COH = mm
 CL = mm

Surface treatment

☐ Silver anodized
 Special anodized
 RAL
 Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Frame Eco
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm
☐ Threshold floor guide, L = FW
☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Automatic door system
 ASSA ABLOY Frame 2 Panel beam mounted opening left
 Art. No. 1009380-2PS-15

ASSA ABLOY SL500

ASSA ABLOY

8.0 1009380-LTE

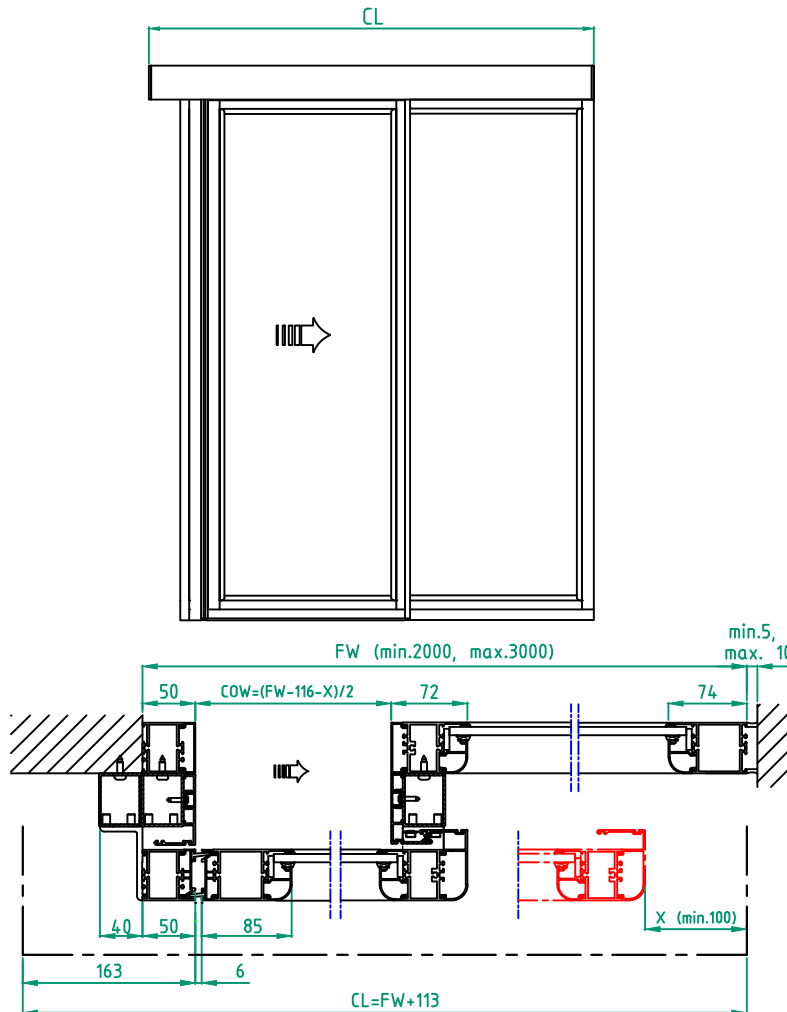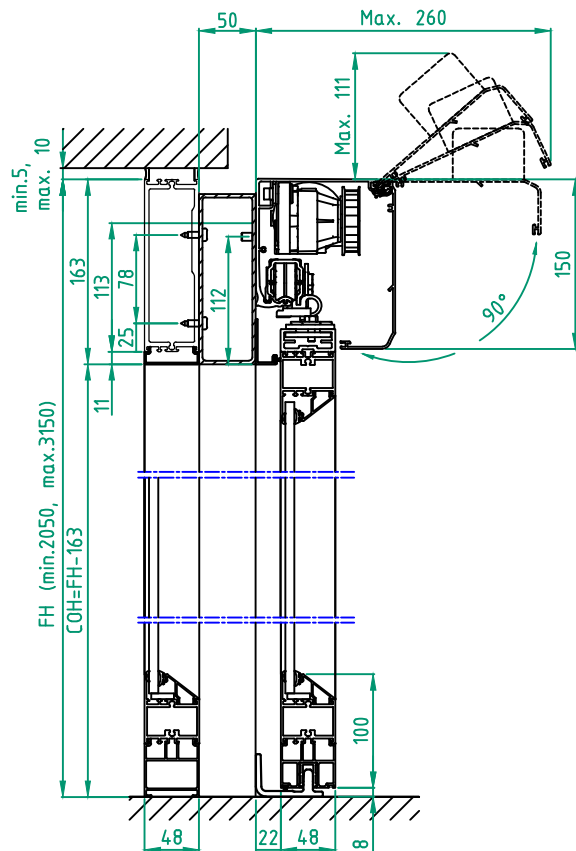

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COW with ASSA = COW-77 = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Options see layers:

☐ Bottom rail 178
☐ Frame Eco
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm
☐ Threshold floor guide, L = FW
☐ TightSeal (floor level difference max. ± 3 mm)

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Refer to the document PRA-0004

Notes:

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Automatic door system
ASSA ABLOY Frame 2 Panel beam mounted opening right
Art. No. 1009380-2PS-15
ASSA ABLOY SL500

ASSA ABLOY

8.0 1009380-LTE