
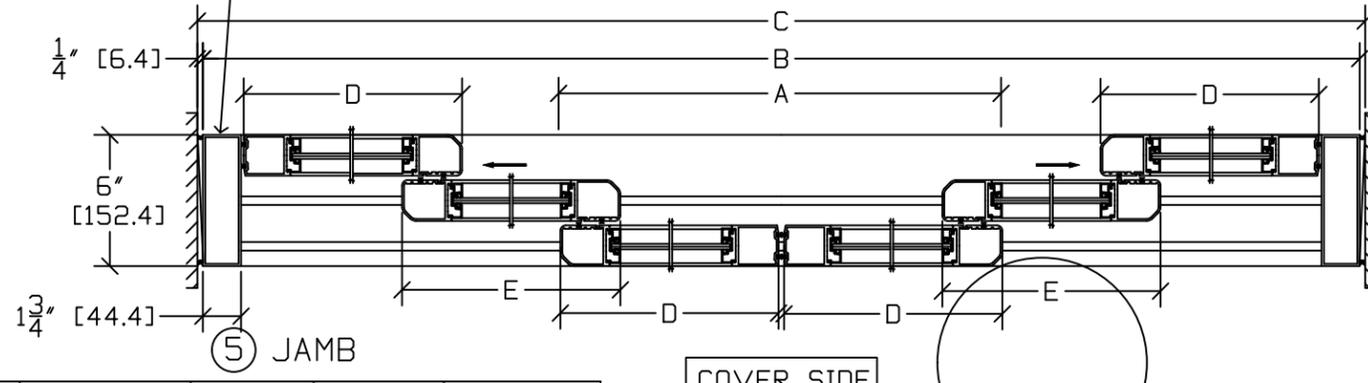


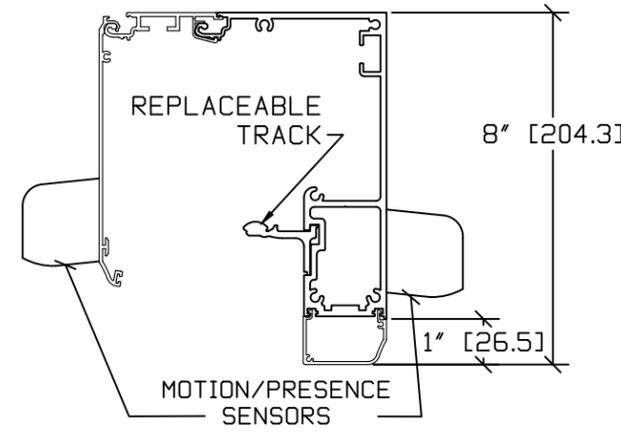
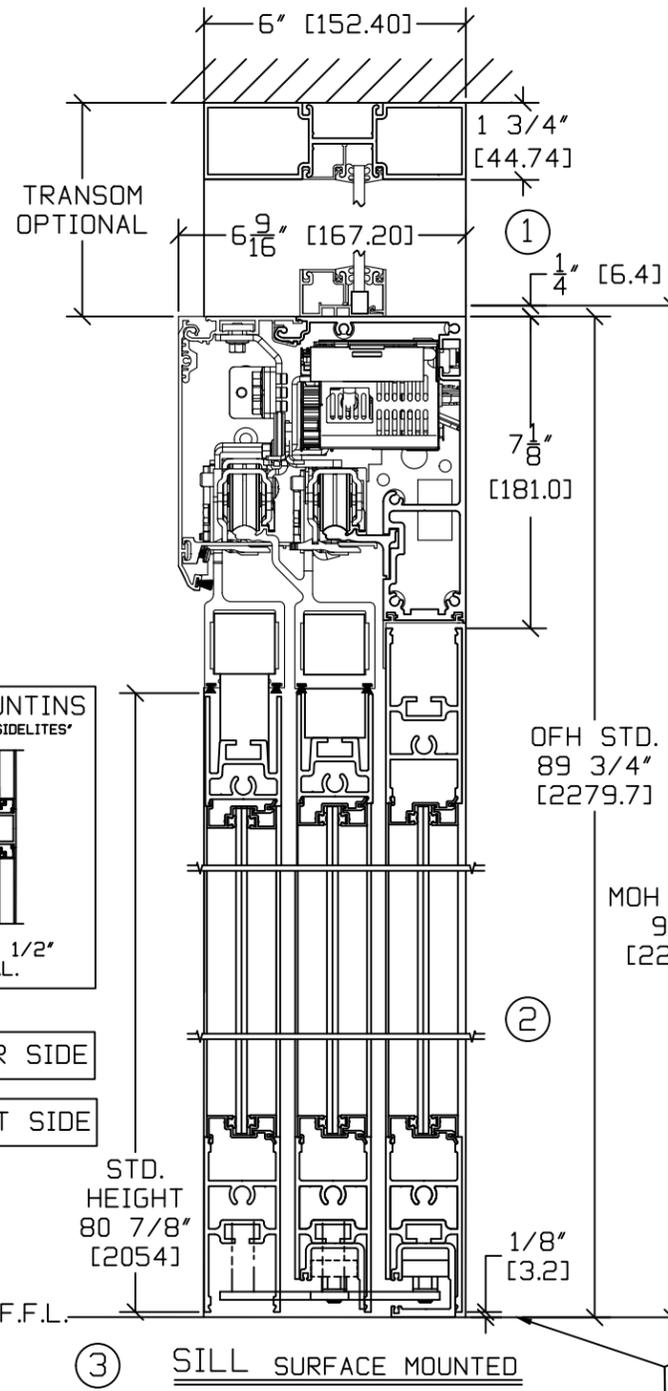


NOTE: THE STANDARD PACKAGE CONSISTS OF:
THE AUTOMATIC OPERATOR & WEATHERSTRIP, FRAMES, DOORS
& SIDELITES WITH VERTICAL WEATHERSTRIP, EMERGENCY
BREAKAWAY, 2-POINT LOCK, 5 OR 3 POSITION SWITCHES (DIGITAL
(3 OR 5) OR KEY (5)), (OFF-EXIT ONLY-AUTO-REDUCED
OPENING-HOLD OPEN OR OFF, AUTO, HOLD OPEN), MOTION/PRESENCE
SENSORS. DUAL BEAMS ARE INCLUDED FOR PACKAGES WITH AN OFW
GREATER THAN 12'.
STANDARD FINISH: CLEAR- AA-M12C22A41, CLASS 1, .018 MM.
DARK BRONZE- AA-M12C22A44, CLASS 1, .018
MM.

SPECIAL FINISHES ARE AVAILABLE.
THIS PACKAGE WILL ACCEPT UP TO 1"(25.4) INSULATED GLASS.
GLASS OVER 1/4" WILL REQUIRE THE HEADER TO BE SUPPORTED
FROM ABOVE.
NOTE DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC
REF. AS FOLLOWS 1" (25.4) ALL METRIC SIZES ARE MILLIMETERS.
FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT
SPECIFICATION, INSTALLATION INSTRUCTIONS, OR THE UL
LABEL ON THE EQUIPMENT.
REFER TO RELEVANT (LOCAL, STATE, NATIONAL OR AHJ) BUILDING
CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE
FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE BELOW.

ELECTRICAL SUPPLY
110 VAC. 60 HZ. 10A.
BY ELEC. CONTR. TO
JUNCTION BOX.

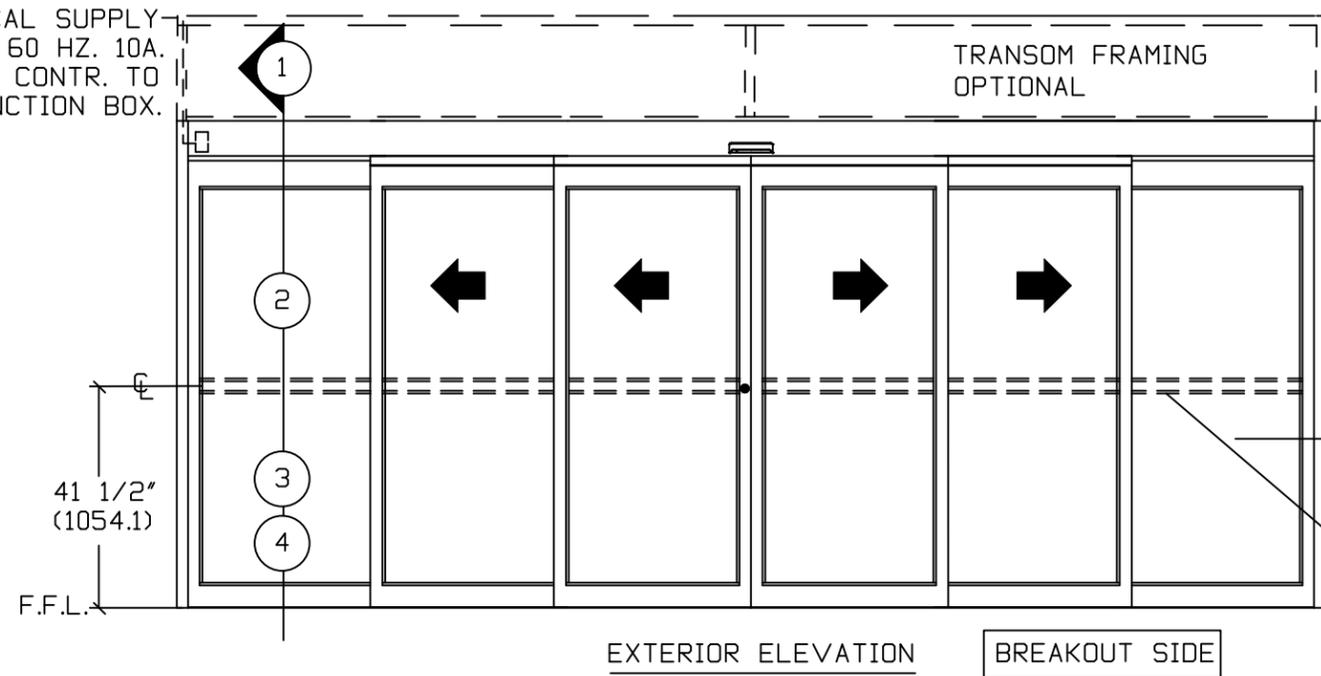


SL500 OHC	DOOR OPENING A	OVERALL FRAME WIDTH B	MASONRY OPENING WIDTH C	ACTIVE & SIDELITE LEAF WIDTH D & E
10'	59 3/16" (1503.4)	120" (3048)	120 1/2" (3060.7)	21 3/16" (538.2)
12'	75 3/16" (1909.8)	144" (3657.6)	144 1/2" (3670.3)	25 3/16" (639.8)
14'	91 3/16" (2316.2)	168" (4267.2)	168 1/2" (4279.9)	29 3/16" (741.4)
* 16'	107 3/16" (2722.6)	192" (4876.8)	192 1/2" (4889.5)	33 3/16" (843)
KEY	(2B/3)-20 13/16 (2B/3)-(528.6)	(C-1/2") (C-12.7)	(B+1/2") (B+12.7)	(B/6)+1 3/16" (B/6)+(30.2)
STD. GLASS SIZE KEY**	WIDTH - 'D' & 'E'	(B/6)-3 5/8" (B/6)-(92.08)		
	WIDTH- 'E'	(B/6)-3 7/8" (B/6)-(98.43)		
	HEIGHT	OFH-15 7/8" OFH-(403.2)		

COVER SIDE

BREAKOUT SIDE

FINISHED FLOOR
MUST NOT BE AN
INCREASE IN
ELEVATION
THROUGH
BREAKOUT DOOR(S)
PATH

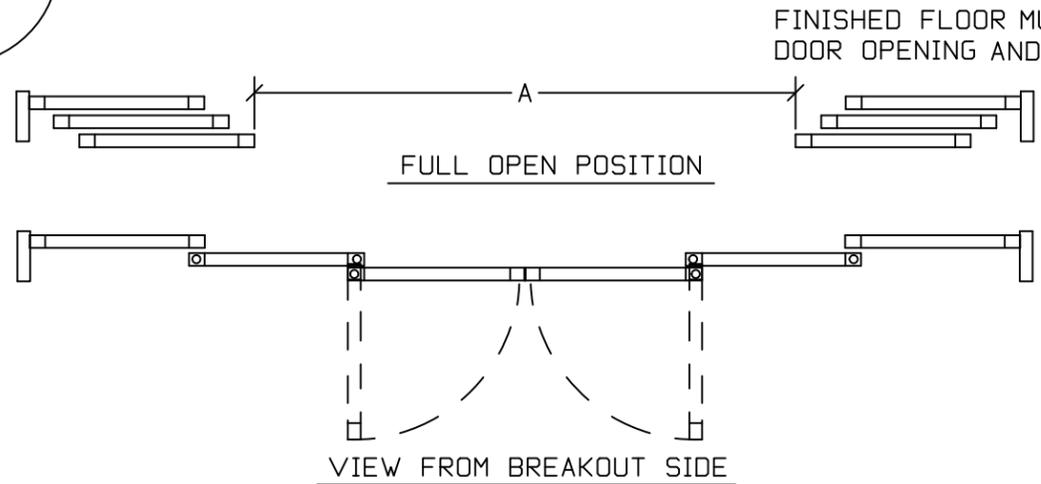

FINISHED FLOOR MUST NOT BE CONCAVE ACROSS THE CLEAR
DOOR OPENING AND NOT OUT OF LEVEL MORE THAN 1/4" (TYP)

DWG NO. 1010831	DRN BY CLW	DATE 6/4/13	CHK BY SS	DATE 6/4/13	REV. 4.0	DATE 01/18/22
-----------------	------------	-------------	-----------	-------------	----------	---------------

* MAXIMUM DOWNWARD HEADER DEFLECTION IS .157" [4MM].
** NARROW STILE RAILS W/ 1/4" GUTTER, NO MUTTINS