

NOTE:

PACKAGE INCLUDES AUTOMATIC OPERATOR, CONTROLLER, CONCEALED ARM,
ALUMINUM DOOR PACKAGE AND SENSOR SYSTEM PER YOUR SELECTION.
SEE I-ADAPT DRAWINGS 1010265 AND 1010266 FOR DETAILS ON SENSOR SYSTEM.

* & ** CONSULT FACTORY

* UNDER 74" (1880) & OVER 98" (2489)

** UNDER 37" (940) & OVER 49 (1245)

NET CLEAR DOOR OPENINGS FOR 36" & 42" DOORS

IN THE OPEN POSITION ARE 32-1/8" & 38-1/8"

RESPECTIVELY (OR BY FORMULA: DOOR SIZE-3.87")

NOTE: EGRESS CLEARANCES MAY BE COMPROMISED BY

NOTE: EXPRESS SPECIFICATIONS MAY BE SUBSTITUTED BY
EXTRA OR ADDITIONAL SURFACE MOUNTED HARDWARE.

STANDARD FINISH:

STANDARD FINISH:


CLEAR - AA-M12C22A41, CLASS 1, .018 MM.

DARK BRONZE - AA-M12C22A44, CLASS 1, .018 MM.


SPECIAL FINISHES ARE AVAILABLE

NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC.



REF. AS FOLLOWS: 1" (25.4). ALL METRIC SIZES ARE IN MILLIMETERS.

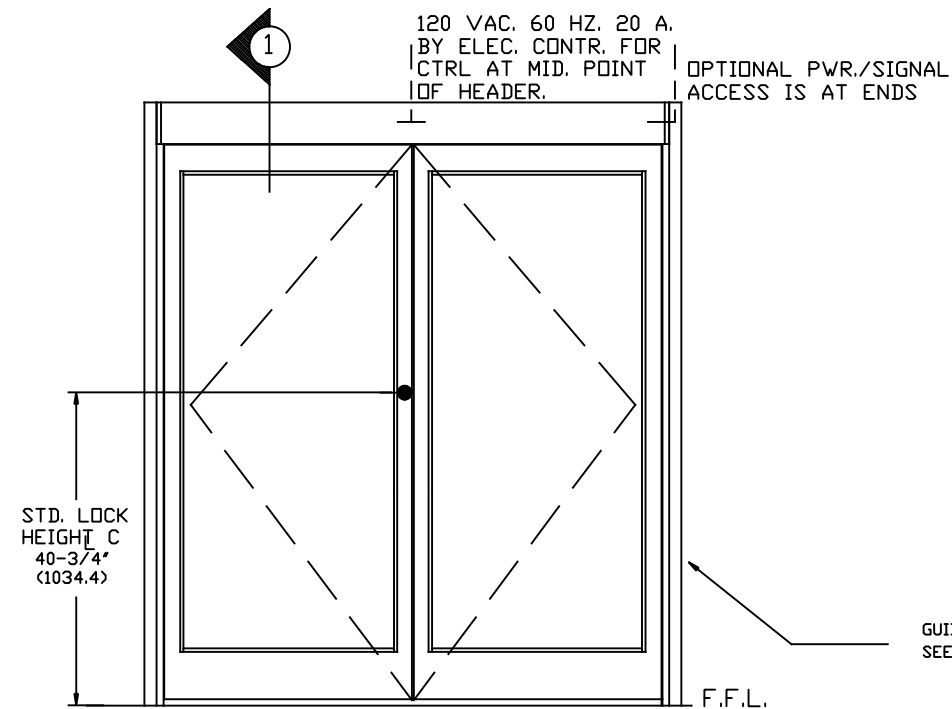


EXTERIOR ELEVATION
SW200i SERIES- DUAL

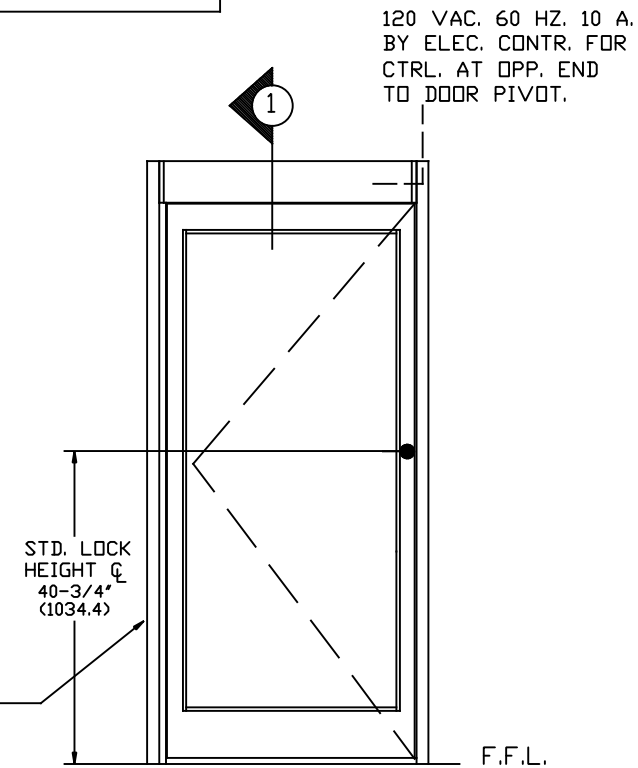

EXTERIOR ELEVATION
(L.H. SHOWN/R.H. OPPOSITE)
SW200i SERIES- SINGLE

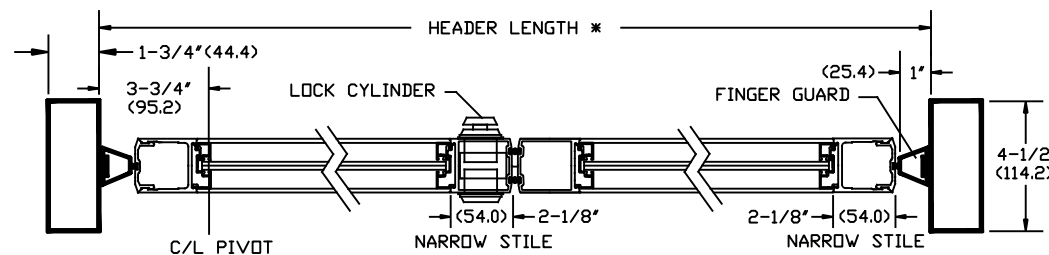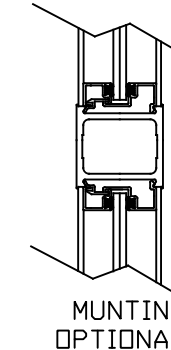


EXTERIOR

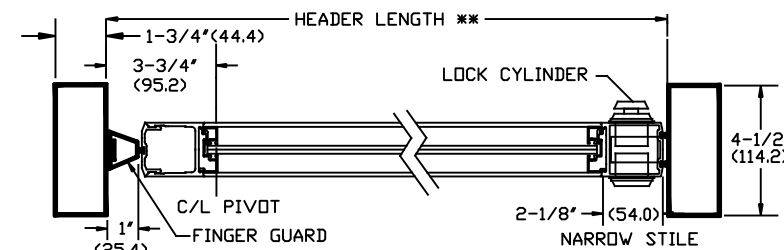


EXTERIOR


INTERIOR

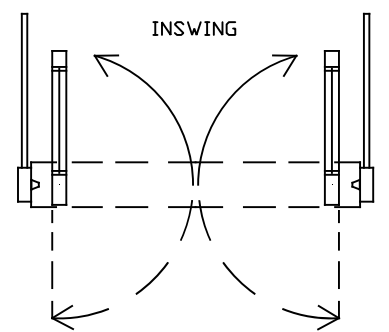


PANIC OUT PANIC OUT
EXTERIOR

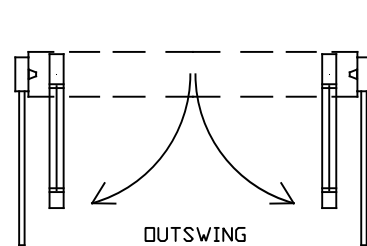


OUTSWING

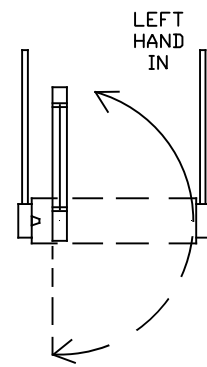


PANIC OUT

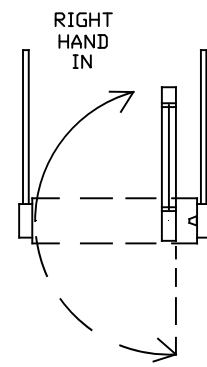

PANIC OUT



RIGHT
HAND
OUT




LEFT
HAND
OUT

GUIDE RAILS OR
BARRIERS (TYP)

NOTE: #

GUIDE RAILS (SHOWN) ARE REQUIRED ON THE SWINGPATH SIDE OF POWER OPERATED PEDESTRIAN DOORS (ANSI 156.10) BUT NOT ON LOW ENERGY POWER OPERATED DOORS (ANSI 156.19).

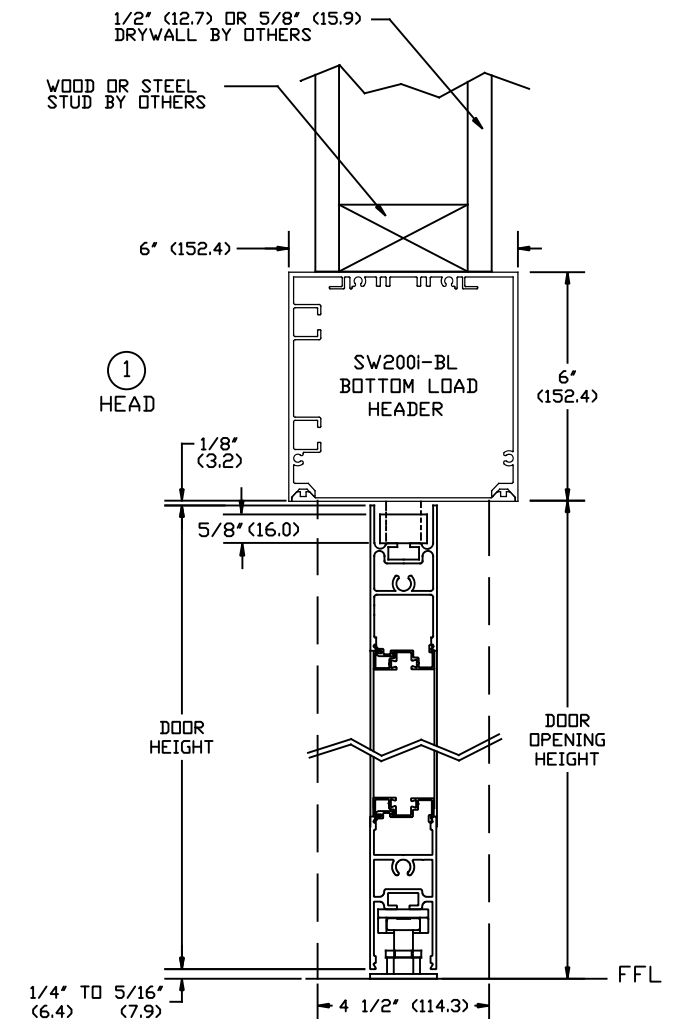

SW200i SERIES

DWG NO. 1010759											
DRN BY	SS	DATE	4/22/13	CHK BY	JAW	DATE	4/22/13	REV	3.0	DATE	1/17/18

ASSA ABLOY