


ASSA ABLOY VERSAMAX TOUCHLESS ICU

OVERHEAD CONCEALED FIXED SIDELITE TRACKLESS SINGLE SLIDE
UL 1784 SMOKE CERTIFIED NARROW STILE TELESCOPIC EQUAL PANEL
SLIDING DOOR SYSTEM



DIMENSIONS FOR 1/4" [6.4] GLASS

| MODEL NO. | OVERALL FRAME WIDTH (A) | CLEAR DOOR OPENING (B) | BREAKOUT OPENING (C) | ACTIVE & SIDELITE LEAF WIDTH (D) | ROUGH OPENING WIDTH (E) |
|-------------|-------------------------|------------------------------------|------------------------------------|----------------------------------|-------------------------|
| VMT3FSLT-8 | 96" [2438.4] | 53 3/4" [1365.3] | 56 1/4" [1428.8] | 32 1/2" [825.5] | 96 1/2" [2451.1] |
| VMT3FSLT-10 | 120" [3048.0] | 69 3/4" [1771.7] | 72 1/4" [1835.2] | 40 1/2" [1028.7] | 120 1/2" [3060.7] |
| VMT3FSLT-12 | 144" [3657.6] | 85 3/4" [2178.1] | 88 1/4" [2241.6] | 48 1/2" [1231.9] | 144 1/2" [3670.3] |
| KEY: | | (2*A/3)-10 1/4" (2*A/3)-[260.4] | (2*A/3)- 7 3/4" (2*A/3)-[196.9] | (A/3)+ 1/2" (A/3)+[12.7] | A+1/2" A+[12.7] |

CONSULT FACTORY FOR ALL CUSTOM CONFIGURATION SIZES OR SIZES OVER 12'.

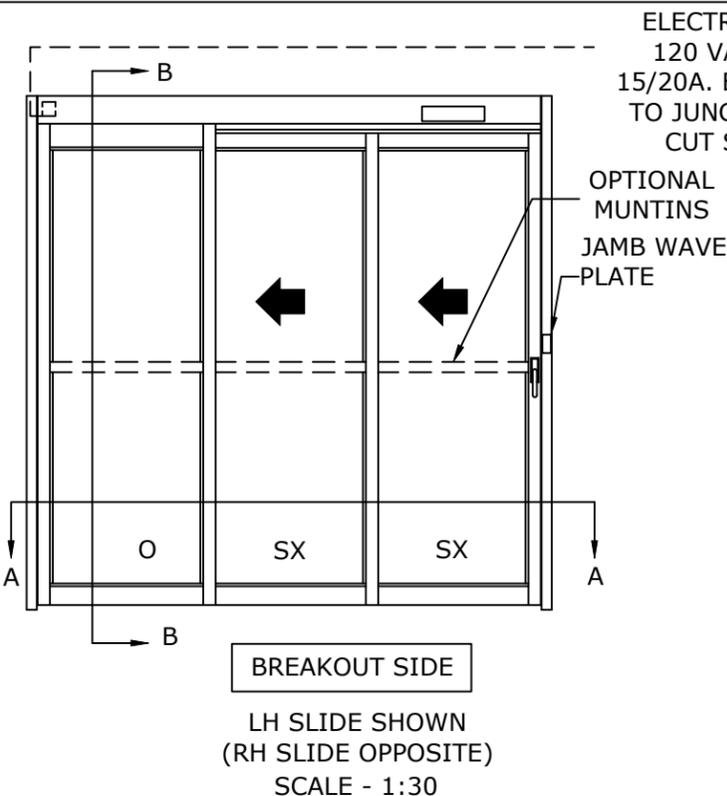

ELECTRICAL SERVICE
120 VAC. 50/60 HZ.
15/20A. BY ELEC. CONTR.
TO JUNCTION BOX, SEE
CUT SHEET AA-26

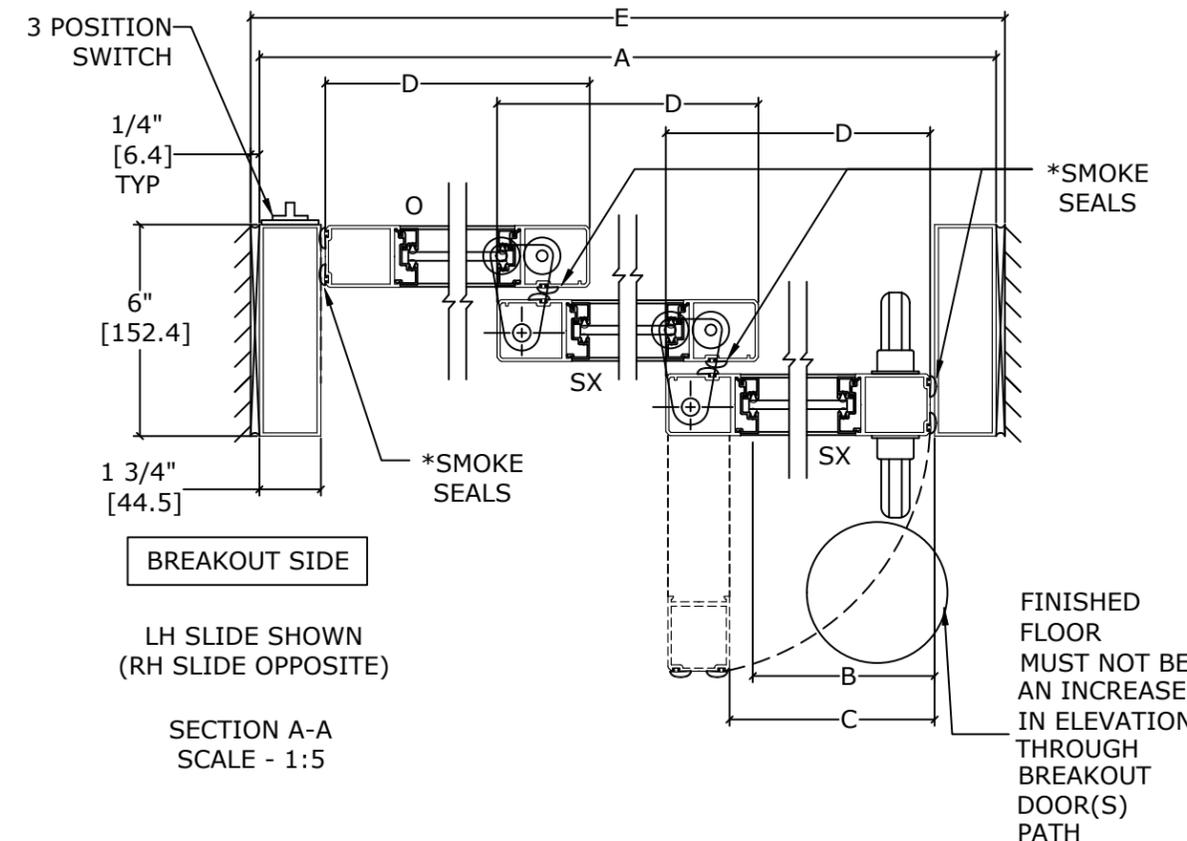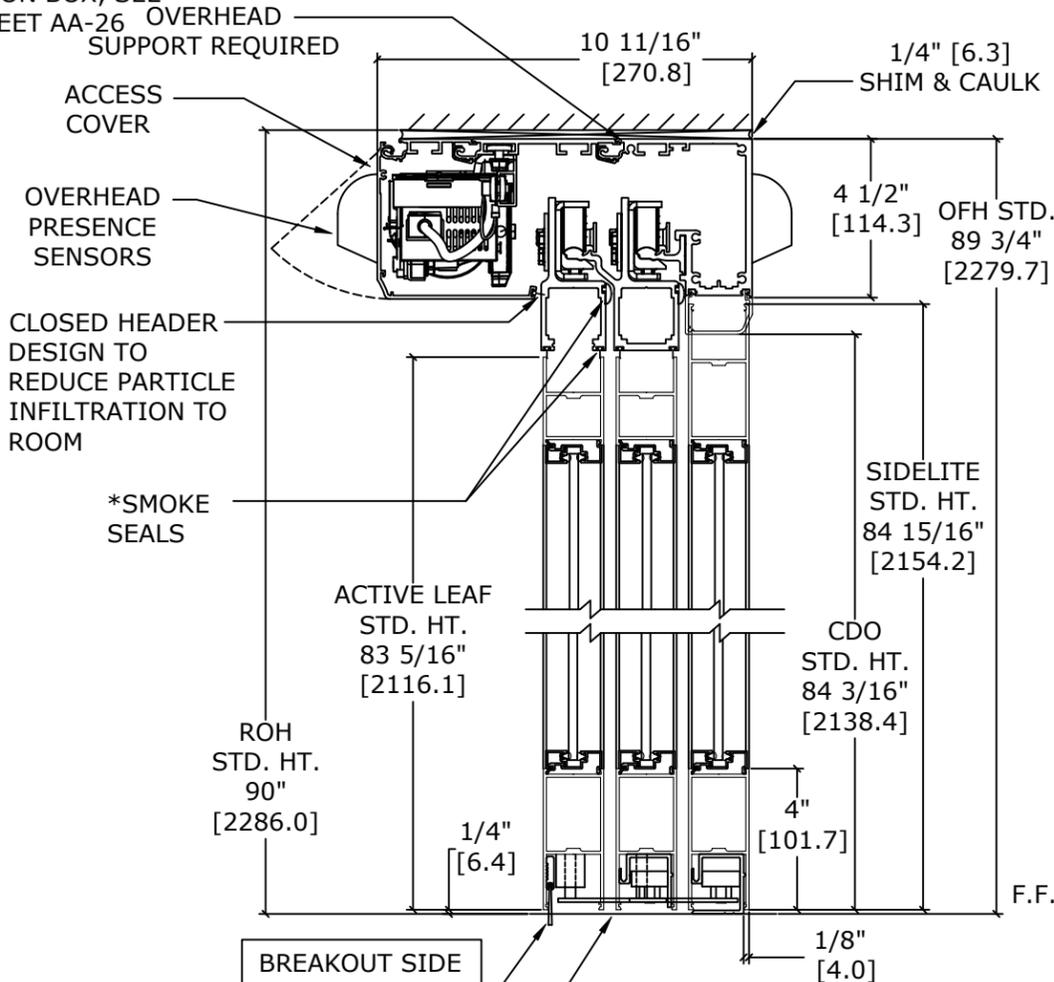

REFER TO RELEVANT [LOCAL, STATE, NATIONAL, OR AHJ] BUILDING CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE.

| | |
|---------|----------|
| DWG NO. | 1016224 |
| DRN BY | DBN |
| DATE | 10/16/18 |
| CHK BY | CLW |
| DATE | 10/16/18 |
| REV. | 4.0 |
| DATE | 01/20/22 |

* SEALS: FACTORY APPLIED SEALS USED ON THIS SYSTEM TO SLOW OR RESTRICT PASSAGE OF SMOKE COMPLIES TO ONE OR MORE OF THE FOLLOWING REQUIREMENTS: UL1784, ANSI/NFPA105 2007, UBC7-2, PART11, B5476, UL10B, UL10C, UBC7-2 PART 1 & B5476.

NOTES:

STANDARD PACKAGE CONSISTS OF:

- STANDARD FINISH: CLASS 1, .018MM, CLEAR- AA-M12C22A41
- NARROW STILE RAILS
- 1/4" GLASS STOPS AND BLOCKS
- POSITIVE LATCHING
- NURSE ASSIST MAGNETIC CATCHES
- OVERHEAD PRESENCE SENSORS
- JAMB WAVE PLATES, SEE SHEET AA-18 FOR DETAILS
- 3 POSITION SWITCH (OPEN, AUTO, CLOSED)
- CONCEALED SWEEPS
- SMOKE RATED SEALS

OPTIONS AVAILABLE:

- SPECIAL FINISHES
- PACKAGE WILL ACCEPT UP TO 1 1/4" [31.8] INSULATED GLASS, SEE SHEET AA-13 FOR DETAILS
- 7" & 10" BOTTOM RAILS, SEE SHEET AA-14 FOR DETAILS
- MUNTINS, SEE SHEET AA-14 FOR DETAILS
- SEE SHEET OS-2 FOR ALL OTHER OPTIONS.

ACTIVE LEAF WITH POSITIVE LATCH

FLUSH STAINLESS STEEL LATCH STRIKE WITH INTERNAL DUST CAP

SINGLE SLIDE RECEIVER JAMB