


Open to the right

Door nr: —

Quantity: —

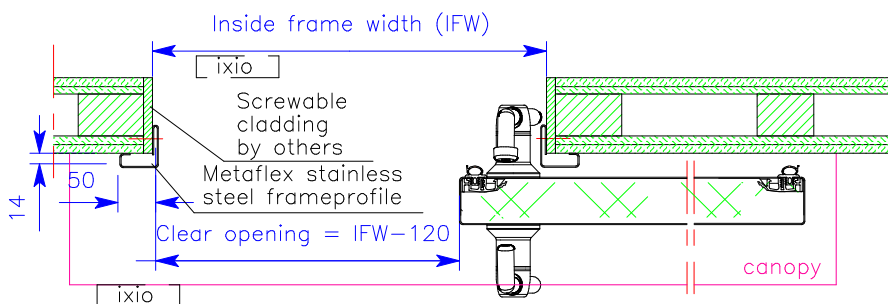

Remarks:	
Current:	230V / 50Hz socket 1P+1N+RA (by others)
Conduits:	5/8" conduits for electrical wiring (by others)
Wiring:	4 x 0,34 mm ² , shielded cables, 2m overlength (by others)
Isolators:	For current, switches and safeties delivered and mounted by others.
Floor:	—Floor must be level. —No corner profile in sliding space

- A: Switches
- B: Socket (current)
- C: Optional functions



ASSA ABLOY

Rev.:	Modificatie:	Datum:	Getekend:	Gecontr.:
Projectie		Schaal: nvt	Getekend: M.S.	Project:
		Maateenheid: mm	Gecontrl.: --	
		Datum: 22-04-2024	Project:	
On all our designs, drawings and other works belonging to us, our copyright and any other intellectual property rights rest.				
Door type: Medinox SDA-05				Formaat: A4
Situation: —		Dwg.no.: 40552S4R-210	Rev. 00	