


Open to the right
Door nr: —
Quantity: —

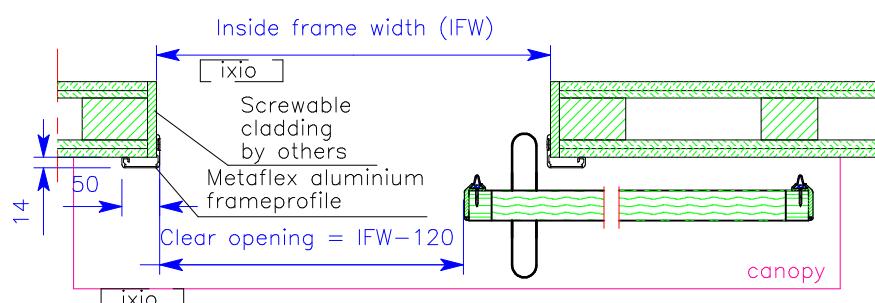

Remarks:

- Current: 230V / 50Hz socket 1P+1N+RA (by others)
- Conduits: 5/8" conduits for electrical wiring (by others)
- Wiring: 4 x 0,34 mm², shielded cables, 2m overlength (by others)
- Isolators: For current, switches and safeties delivered and mounted by others.
- Floor: -Floor must be level.
-No corner profile in sliding space

A: Switches
B: Socket (current)
C: Optional functions

Rev.:	Modificatie:		Datum:	Getekend:	Gecontr.:		
Projectie		Schaal: nvt	Getekend: M.S.	Project:			
		Maateenheid: mm	Gecontroleerd: —	—			
		Datum: 22-04-2024	Project:	—			
On all our designs, drawings and other works belonging to us, our copyright and any other intellectual property rights rest.							
Door type: Metaficient SDA-05 Formaat: A4							
Situation: —			Dwg.no.: 40560S4R-210	Rev. 00			

