


Din Right
Mark:
Quantity:

Approved by:

Initials:

Date:

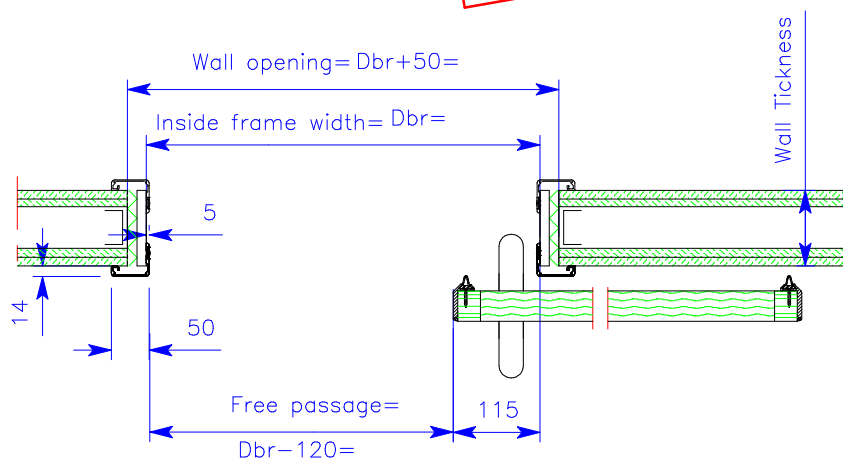

Remarks:


- Current:** 230V / 50Hz socket
1P+1N+RA (by others)
- Conduits:** 5/8" conduits for electrical
wiring (by others)
- Wiring:** 4 x 0,34 mm², shielded
cables, 2m overlength (by
others)
- Isolators:** For current, switches and
safeties delivered and
mounted by others.
- Floor:** -Floor must be level.
-No corner profile in sliding
space

A: Switches
B: Socket (current)
C: Optional functions



Metaflex Doors Europe
P.O.Box 300, 7120 AH Aalten
The Netherlands

Tel. +31(0) 88 - 1414900
www.metaflex.nl

Rev.:	Modification:	Date:	Drawn:	Checked:
<div>Projektion</div> <div></div>	Scale: nvt	Drawn: P.N.	Work: Metaflex Aalten	
	Dimension: mm	Checked: –		
	Date: 19–08–2016	Project: –		
	We explicitly reserve all rights regarding our designs, drawings and other products, as well as intellectual property rights if applicable.			
Discription: MF5 Metaficient, aut.				Size:
Belongs to: –		Drg.no.: 40560S4R–212	rev. 00	A4