

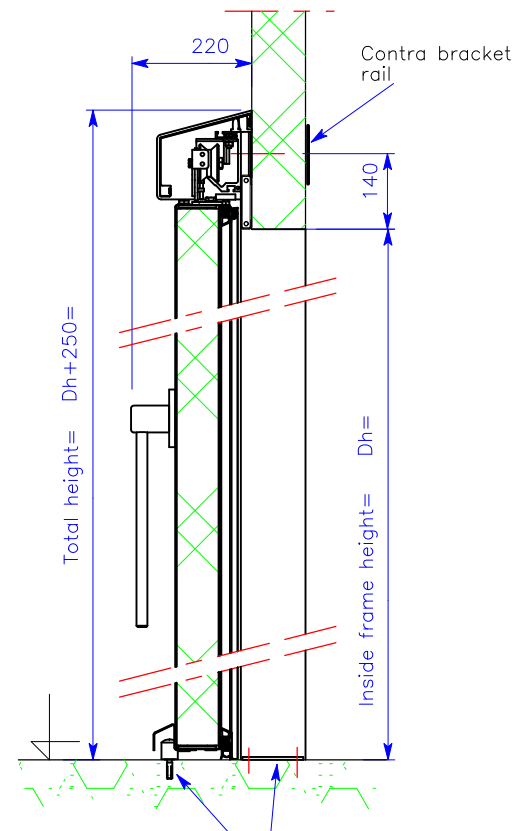


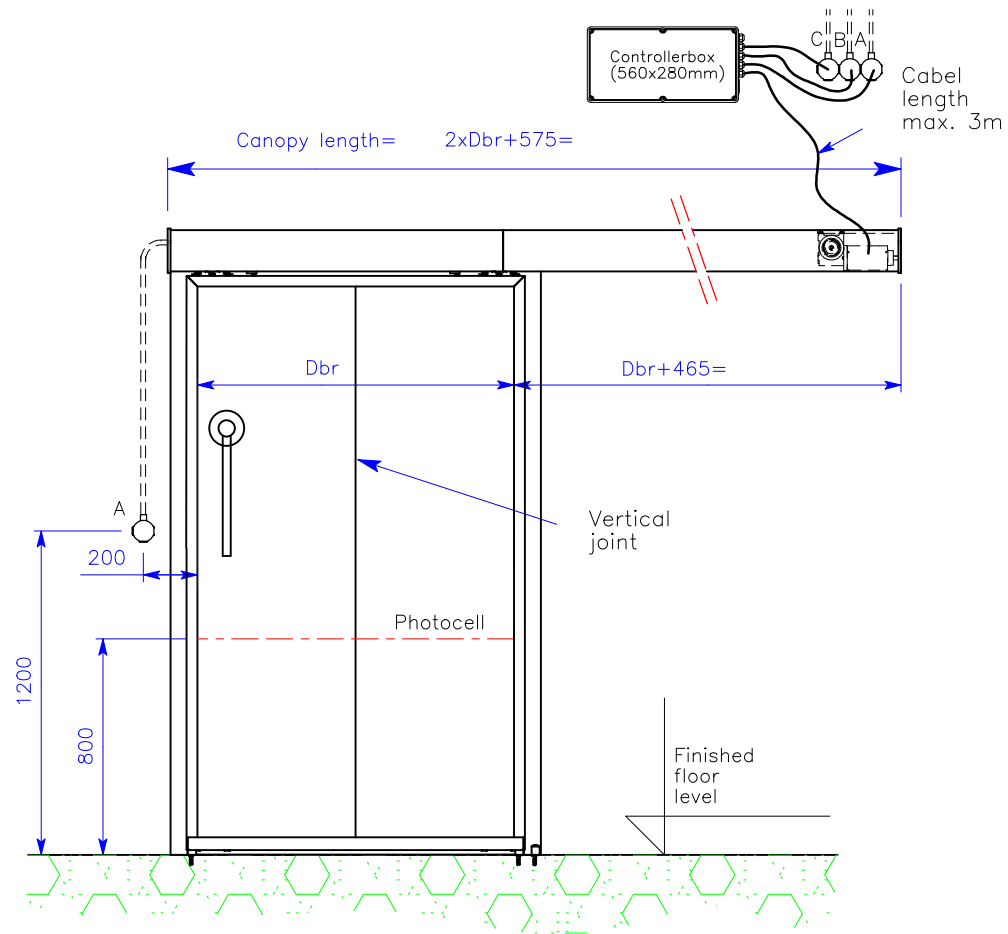

Rolls and frame brackets drilled in floor.

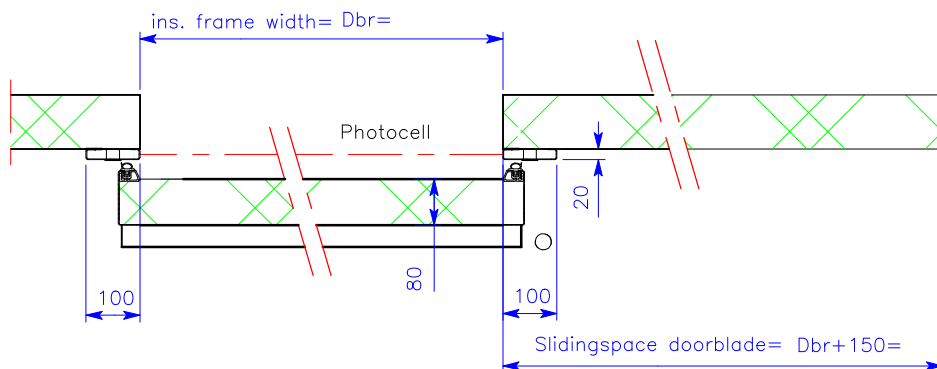

Open to the Right
Door no:
Quantity:

Approved by:

Initials: Date:

Remarks:

- Current:** 230V / 50Hz socket 1P+1N+RA (by others)
- Conduits:** 5/8" conduits for electrical wiring (by others)
- Wiring:** 4 x 0,34 mm², shielded cables, 2m overlength (by others)
- Isolators:** For current, switches and safeties delivered and mounted by others.
- Floor:** -Floor must be level.
-No corner profile in sliding space
- A:** Socket (current)
B: Switches
C: Optional functions



Rev.:	Modification:	Date:	Drawn:	Checked:
	Projektion	Scale: nvt	Drawn: GWL	Work:
		Dimension: mm	Checked: -	
	Date: 14-08-2016	Project no.:		
We explicitly reserve all rights regarding our designs, drawings and other products, as well as intellectual property rights if applicable.				
Discription: MAK Chiller, Aut.				Size:
Belongs to:		Drg.no.: 10780S4L-413	rev. 00	A3