

Fire resistant EI fabric curtain Marc-Ok+ EI30 EI60

Safety redefined

- # Innovative, refined with attention to every detail
- # Leader among passive fire protection
- # Provides safety for your every project
- # Fully complete and fitted, ready for quick and easy installation

A safe solution - competitively priced

EI30
EI60

Extremely light sheet thickness:
17 mm – 5,5 kg/m²

CE

Certificate of Constancy
of Performance



The gate dimensions are adjusted
to the customer's order,
up to 18x10 m

2
years

2-year warranty

CE marking documents

Certificate of Constancy of Performance
2775-CPR-005 for EI,60, EI,60, EW120
2775-CPR-006 for EI,30, EI,30, EW120



Shared Vision of **Safety**



The option for
tandem installation



Utility
category C2



Drive unit with
gravity activation



Designed for both indoor
and outdoor installation

MALKOWSKI.PL/EN



The unique solutions used in Marc-Ok+ EI30 EI60 guarantee not only great product safety, but also durability, easy installation and maintenance



FLUSH SHAFT BOX FINISH
– the EI30 EI60-rated version's shaft box is installed flush with the guide rails



QUICK AND EASY INSTALLATION
The simple winding shaft 'Slide & Lock' system helps reduce the installation time by 25%




CONCEALED CURTAIN SHEET
the sheet is hidden fully inside of the shaft box, not protruding



Variety of applications Marc-Ok+ EI30 EI60

The gate doesn't require a large space in the lintel or a heavy-duty mounting structure, making it suitable for any functional space. It can be installed both indoors and outdoors of the facility. Thanks to the well-thought-out design, it can be installed in tandem with a gate for everyday use. The minimum dimensions of the shaft box, 300x325 mm, allow for the installation of the Marc-Ok+ curtain anywhere space is limited and minimise the gate's dimensions.

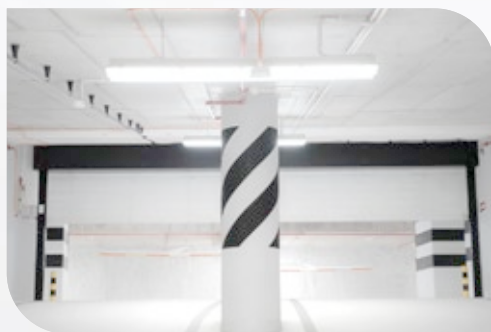

Flexible installation

We created the Marc-Ok+ curtain gate with the intention of meeting the demands of areas designated for investment development. Its appropriate design provides the opportunity to adapt the gate installation to the building conditions of a given investment. The Marc-Ok+ EI30 EI60 gate can be installed in a wall-mounted [ceiling-mounted], corridor-mounted [recessed], mixed [wall-mounted - recessed], and indirect using spacer elements, mainly in external installations.



Handling system fire closures

The specific door structure and the option to expand its control system make it also dedicated to spaces for special purposes. The control system of the fire closures ensures full fire safety, both for buildings and the entire transport line. Synchronisation of closure of fire protection handling systems with the operation of the conveyor line is a control priority and guarantees that the system maintains its function during a fire.

CE marking documents

Certificate of Constancy of Performance
2775-CPR-005 for EI,60, EI,60, EW120
2775-CPR-006 for EI,30, EI,30, EW120



Shared Vision of **Safety**

MALKOWSKI.PL/EN

