



DIMENSIONS

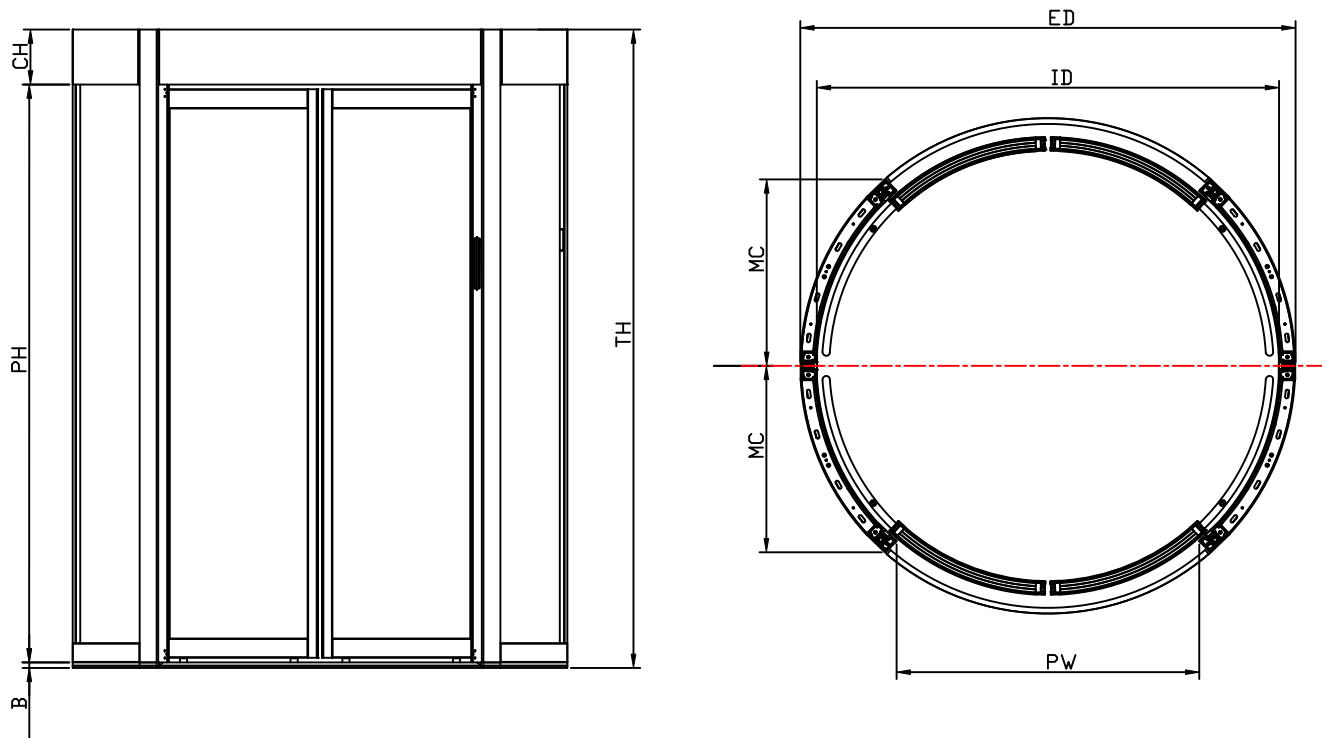

MM	ED	ID	PW	PH	CH	B RC1/RC2	B RC3/RC4	TH RC1/RC2	TH RC3/RC4	MC
IR6	1050	930	600	2100	200	20	28	2320	2328	397
IR7/IR7F	1200	1080	700	2100	200	20	28	2320	2328	453
IR9/IR9F	1500	1380	900	2100	200	20	28	2320	2328	560
IR11/IR11F	1800	1680	1100	2100	200	20	28	2320	2328	678

HOLES FOR FIXING TO THE FLOOR

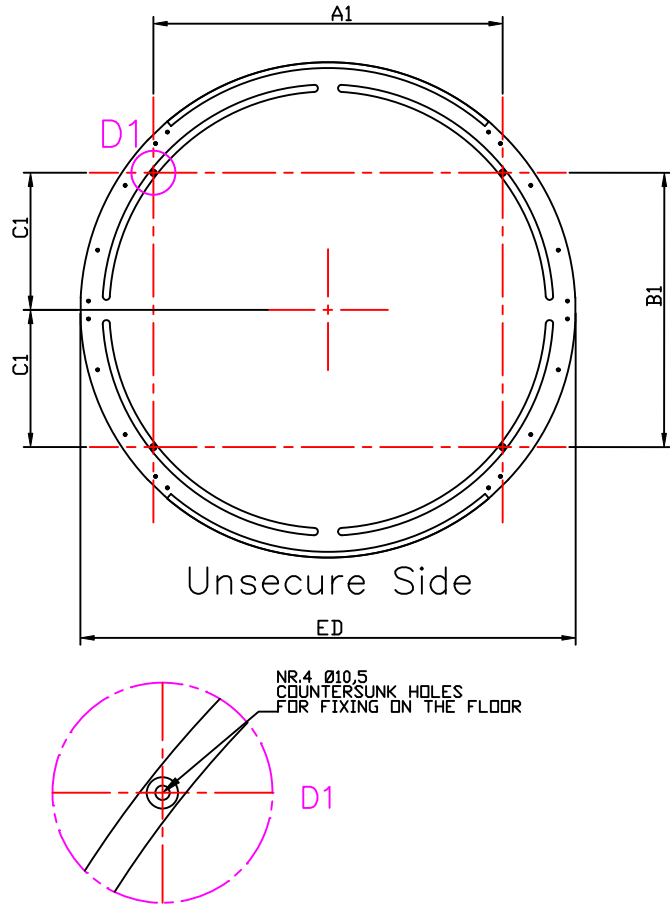


MM	A1	B1	C1		MM	A1	B1	C1
IR6	718	480	240		IR7/IR7F	843	564	282
IR9/IR9F	1033	812	406		IR11/IR11F	1269	996	498

Date:
31/10/2025
Review:
Rev. 1
Model:
IR model

ASSA ABLOY

DETAILS OF ENTRY CABLES

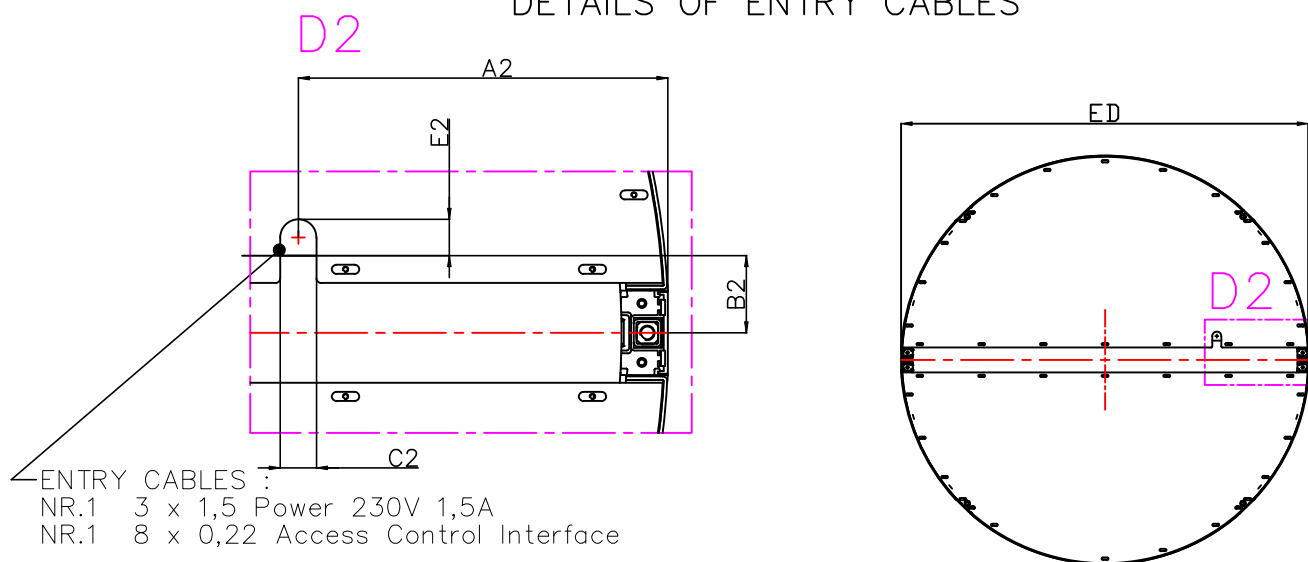

ENTRY CABLES :

NR.1 3 x 1,5 Power 230V 1,5A


NR.1 8 x 0,22 Access Control Interface

OPTION :


NR.1 Ethernet Class 5 For Tablet
Connection If Not Used In WiFi Mode

MM	A2	B2	C2	E2		MM	A2	B2	C2	E2
IR6	347	85	40	40		IR9/IR9F	347	85	40	40
IR7/IR7F	422	85	40	40		IR11/IR11F	407	85	40	40

DETAILS OF THE STRUCTURE UPRIGHTS IR6-IR7-IR7F-IR9-IR9F

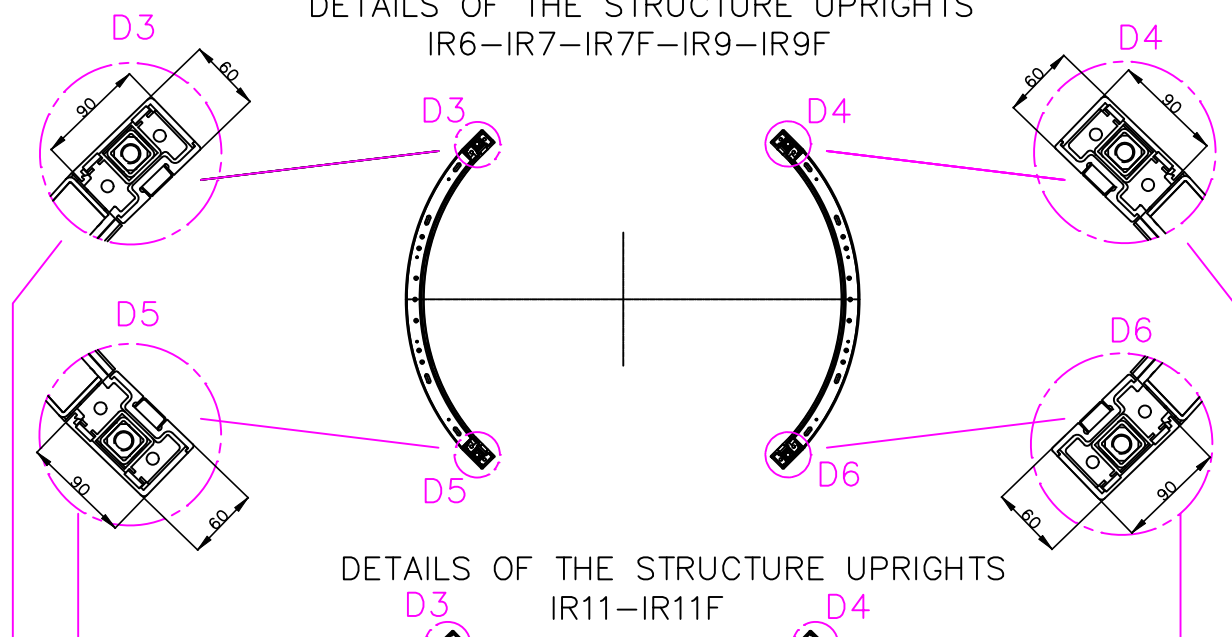

DETAILS OF THE STRUCTURE UPRIGHTS IR11-IR11F



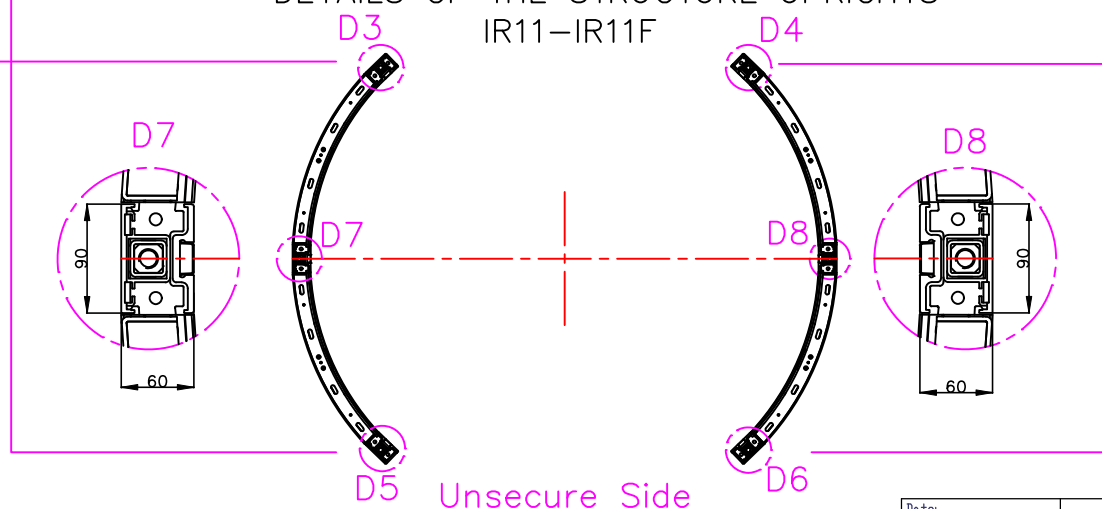


Unsecure Side

Date:
31/10/2025
Review:
Rev. 1
Model:
IR model



ASSA ABLOY

CONNECTION PROFILES FOR INTERLOCKED DOORS

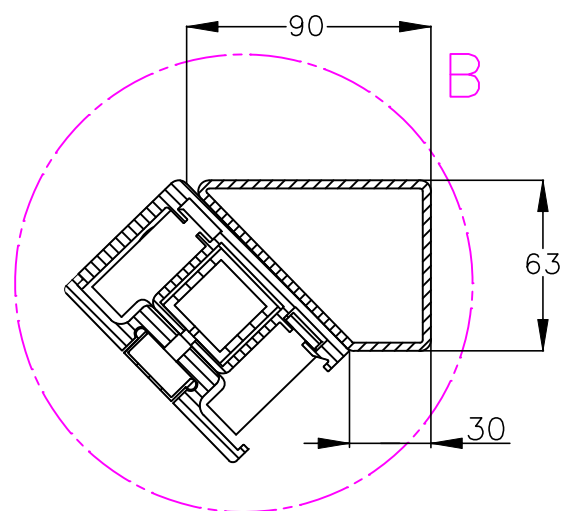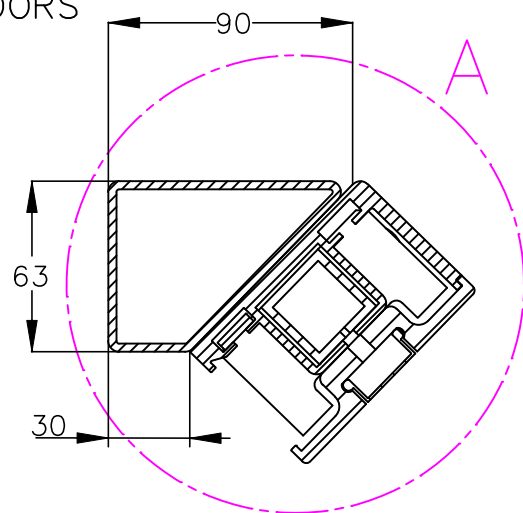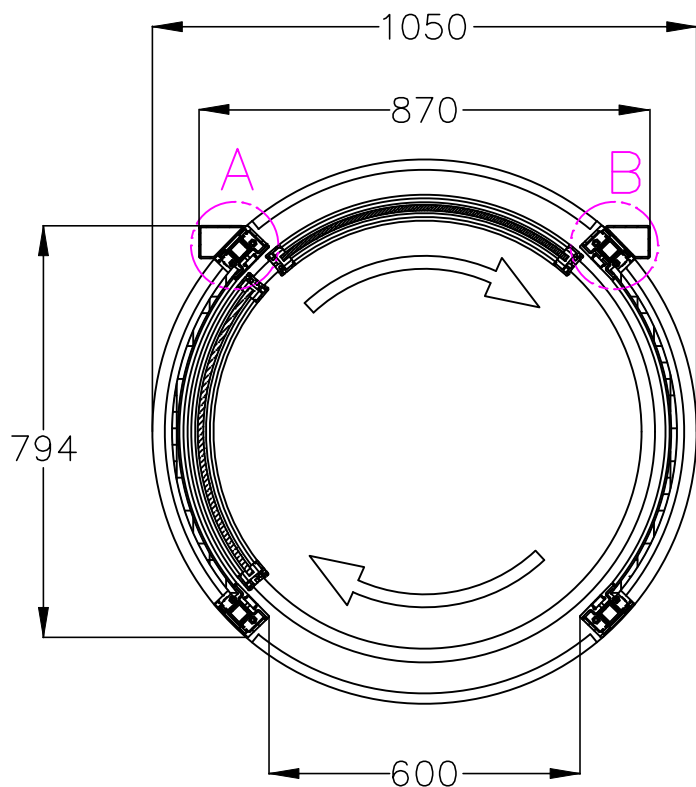

ONLY FOR IR11F

Ø 1800

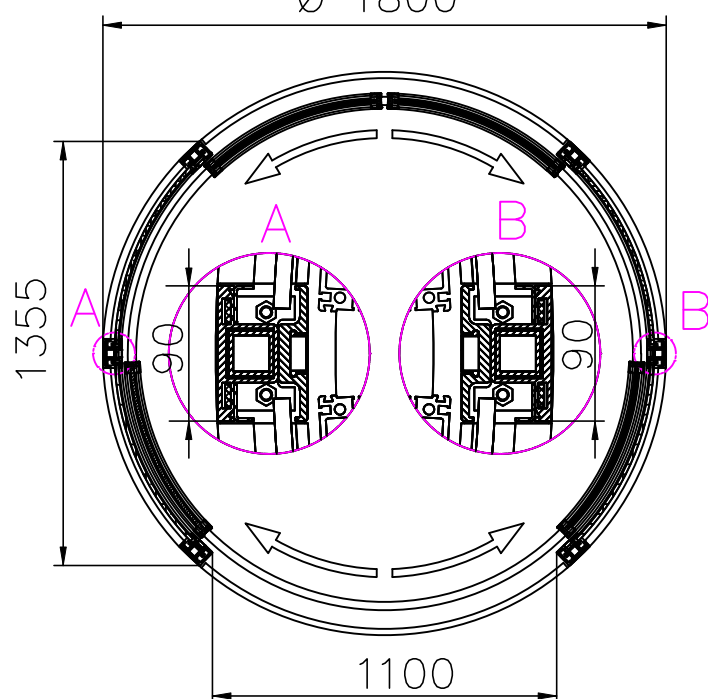
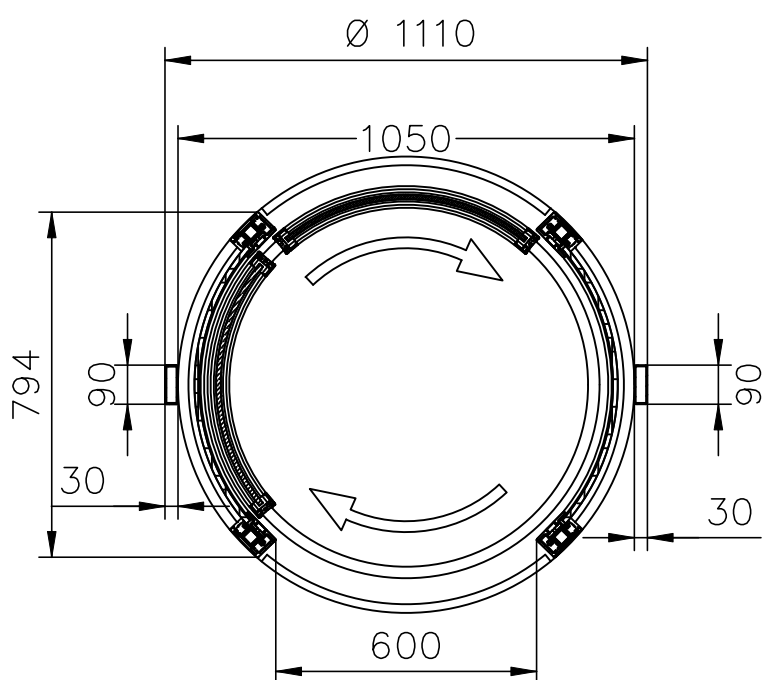


NOTE: HEIGHT OF THE PROFILE IS AS THE TOTAL HEIGHT OF THE PORTAL FROM THE FINISHED DOOR

Date:
31/10/2025
Review:
Rev. 1
Model:
IR model

ASSA ABLOY

RECESSED BASE FOR INTERLOCKED DOORS

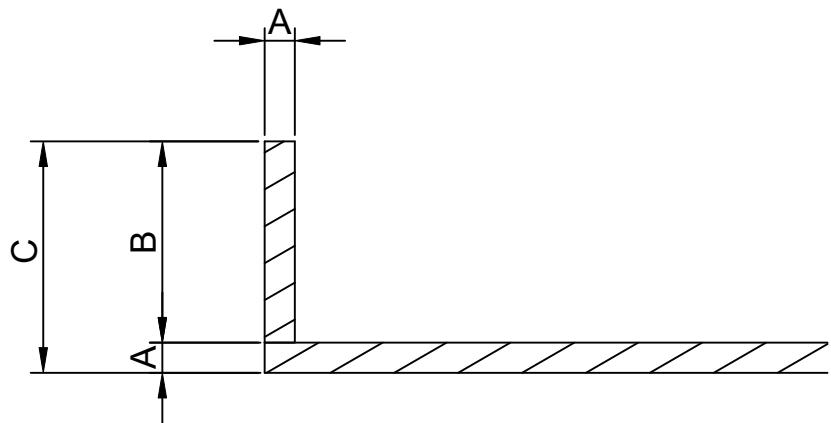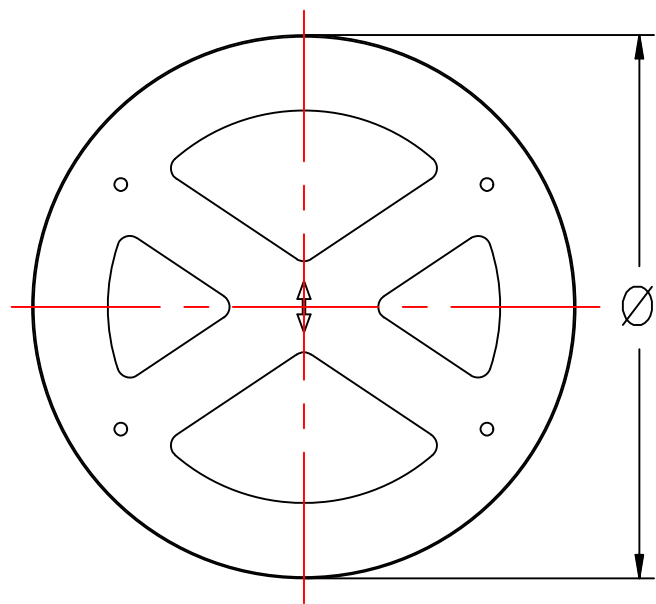

	A	B	C
RC1/RC2	3	20	23
RC3/RC4	3	28	31

	Ø
IR6	1066
IR7/IR7F	1216
IR9/IR9F	1516
IR11/IR11F	1816

