



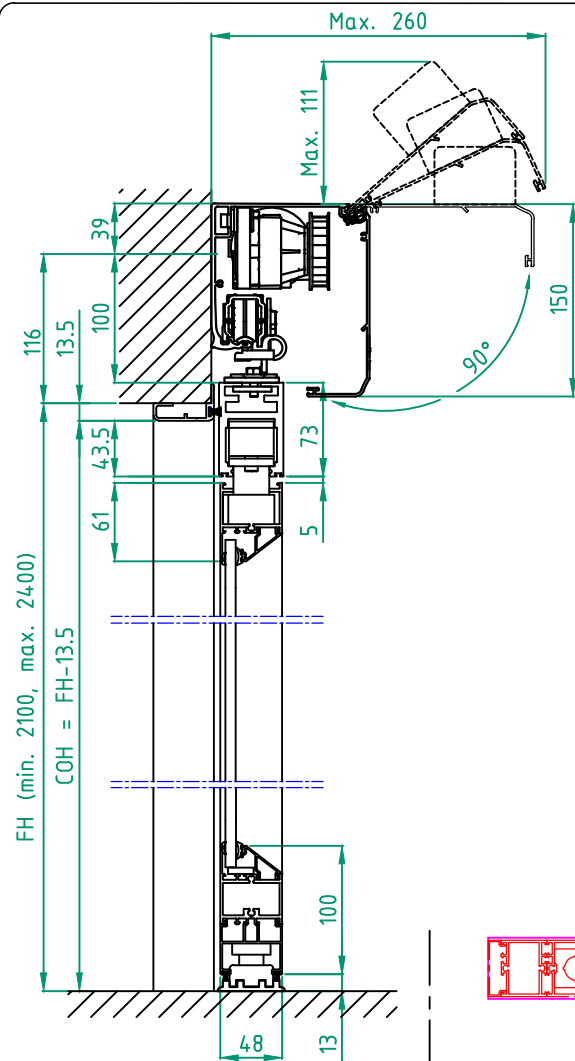

Notes:

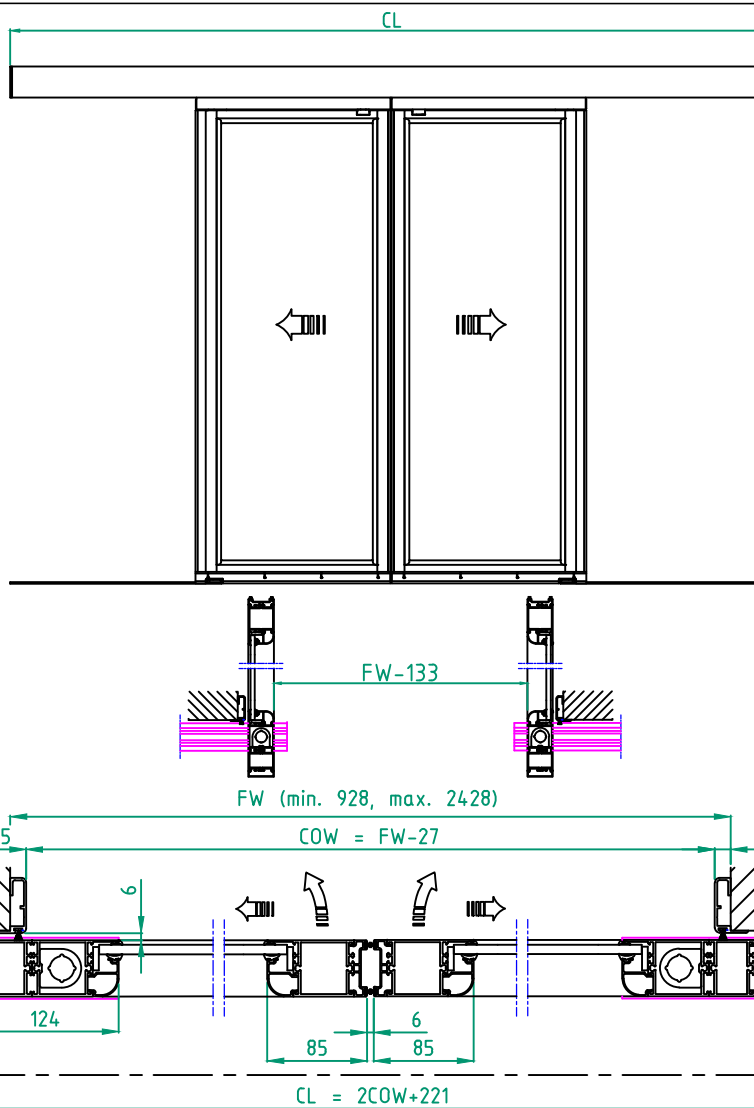

STATE WHEN ORDERING

FW = mm
FH = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 5,1 m²

If 40 mm glass FW x FH = max. 4,4 m²




Installation

☐ Floor heating
☐ Sensor
☐ Other

Customer:	Ref:	Automatic door system ASSA ABLOY Frame break-out special 2 Panel wall mounted Art. No. 1009384-2PB-15 ASSA ABLOY SL500
Door id:	Date:	
Project No:	Sign:	

ASSA ABLOY

8.0 1009384-en

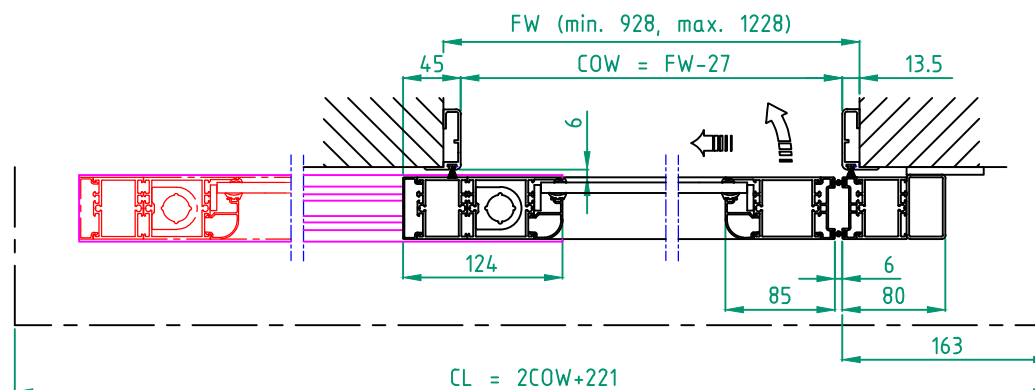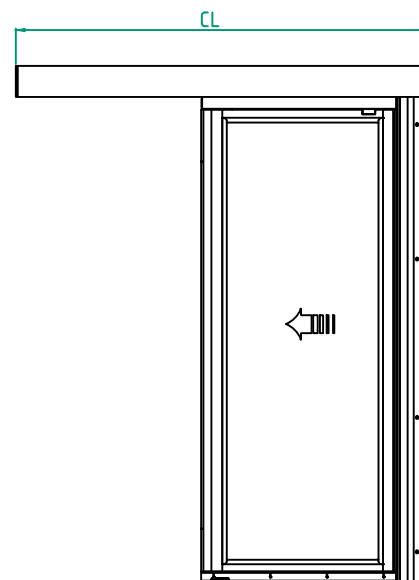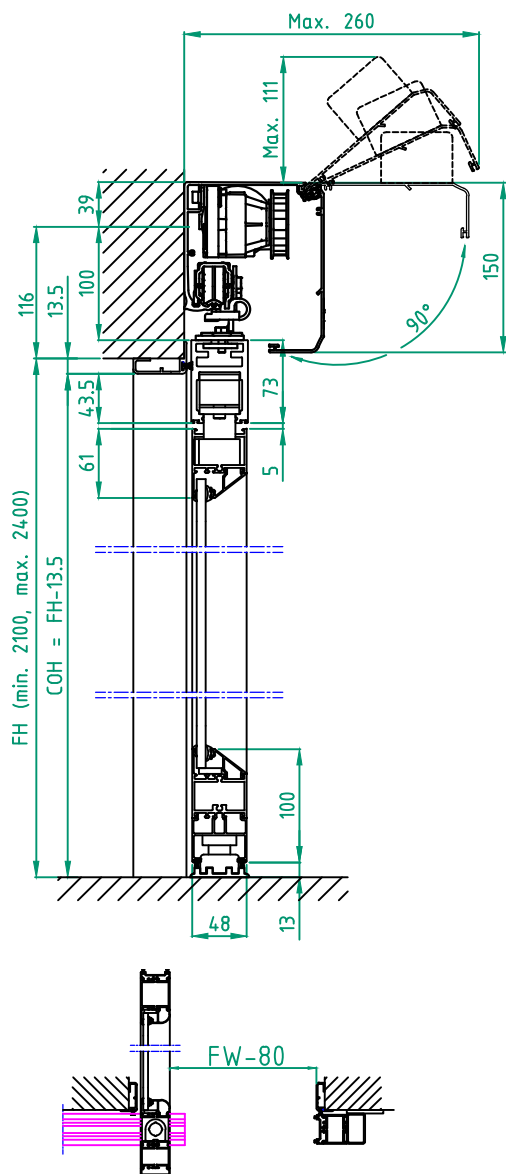

STATE WHEN ORDERING

FW = mm
FH = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

.....
Combination of glass and infill panel.

Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 2,6 m²

If 40 mm glass FW x FH = max. 2,2 m²

Installation

☐ Floor heating
☐ Sensor
☐ Other

Notes:

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Automatic door system
ASSA ABLOY Frame break-out special
1 Panel wall mounted opening left, Art. No. 1009384-1PS-15
ASSA ABLOY SL500

ASSA ABLOY

8.0

1009384-en

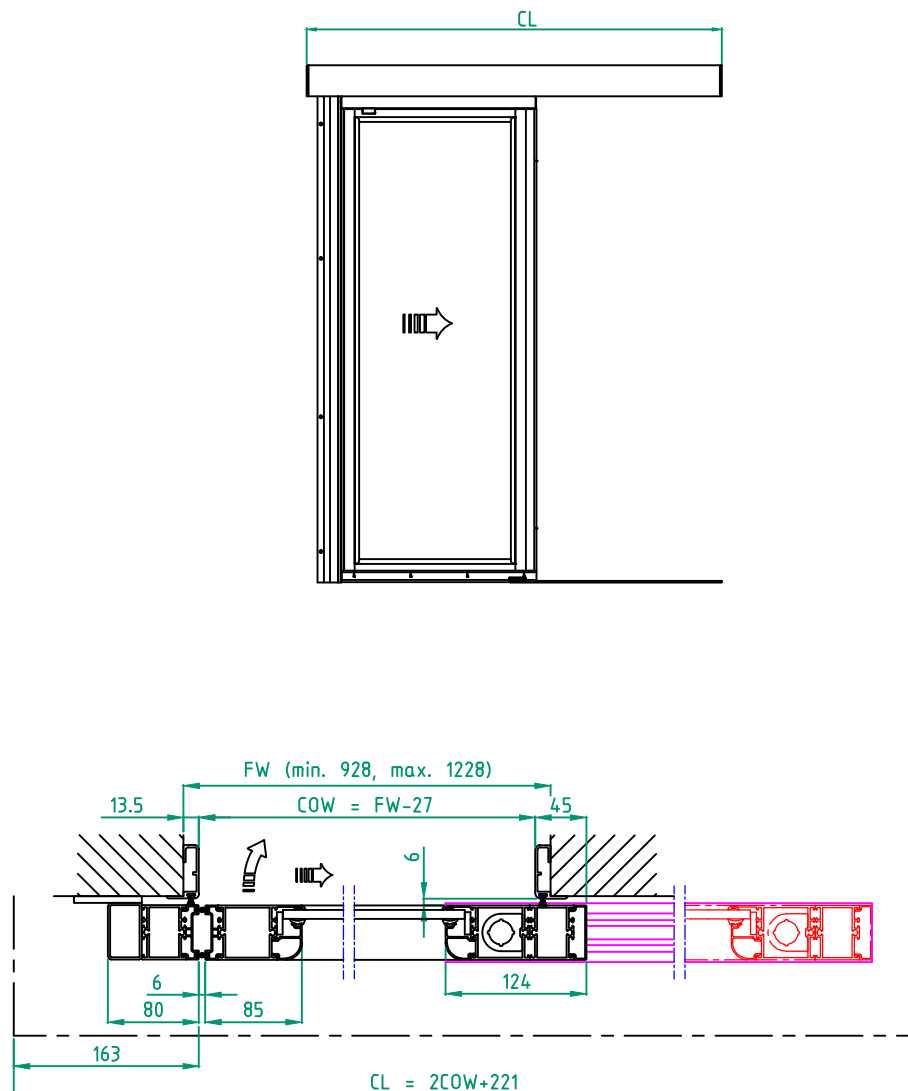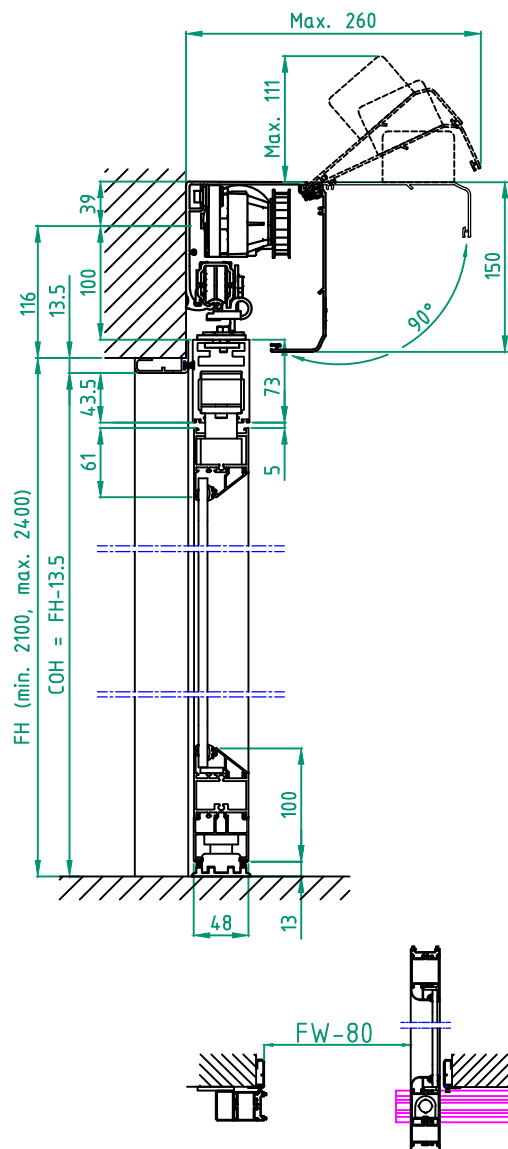

STATE WHEN ORDERING

FW = mm
FH = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.

Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 2,6 m²

If 40 mm glass FW x FH = max. 2,2 m²

Installation

☐ Floor heating
☐ Sensor
☐ Other

Notes:

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Automatic door system
ASSA ABLOY Frame break-out special
1 Panel wall mounted opening right, Art. No. 1009384-1PS-15
ASSA ABLOY SL500

ASSA ABLOY

8.0

1009384-en