
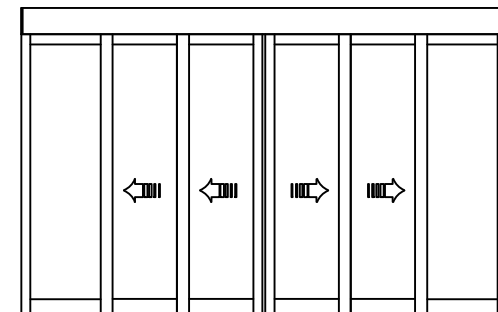


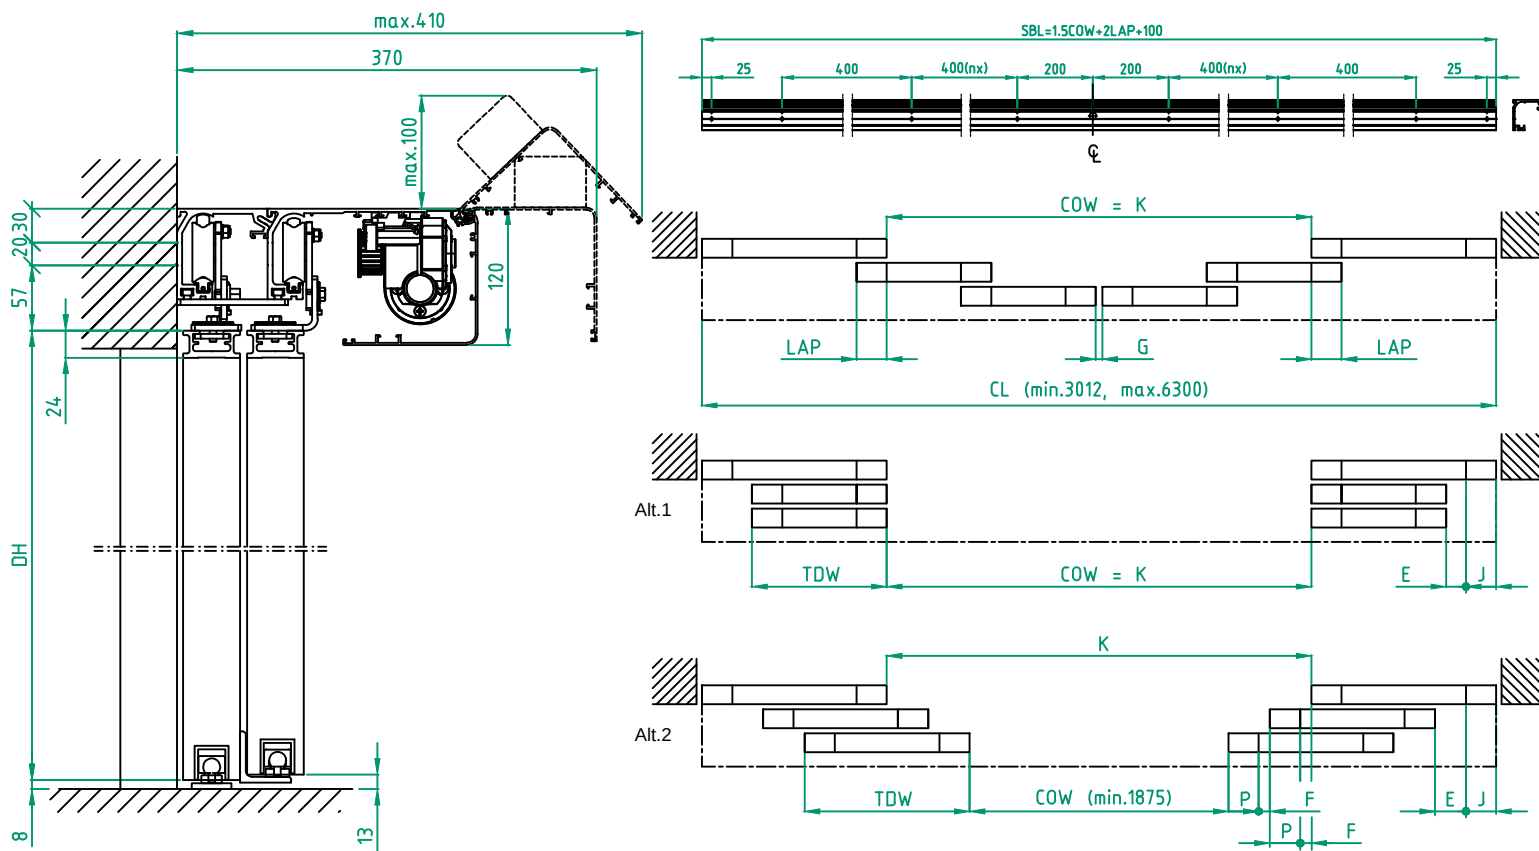

STATE WHEN ORDERING

COW = mm
CL = mm
SBL = mm
LAP = mm
G = mm
TDW = mm
Door weight = kg

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

	Alt. 1	Alt. 2		
Overlap (min. 20mm)	LAP	LAP		x2 =
Finger protection (min. 25mm)	E	E		x2 =
Finger protection (min. 25mm)	-	F		x4 =
Jamb width (min. 30mm)	J	J		x2 =
Leading edge width	-	P		x4 =
Sum of above			Sum =	

Alt.1 COW = K	K =	
Alt.2 COW + 4P + 4F = K	K =	(K + 4LAP - G) / 4 = TDW TDW =
Cover length CL	(CL - Sum) / 1,5 = = COW max.	
Door travel COW	(COW x1,5) + Sum = = CL min.	

Customer:

Ref:

Door id:

Date:

Project No:




Sign:

Sliding door operator
ASSA ABLOY SL521-2
Art. No. 1019883

ASSA ABLOY

2.0

1020437-en

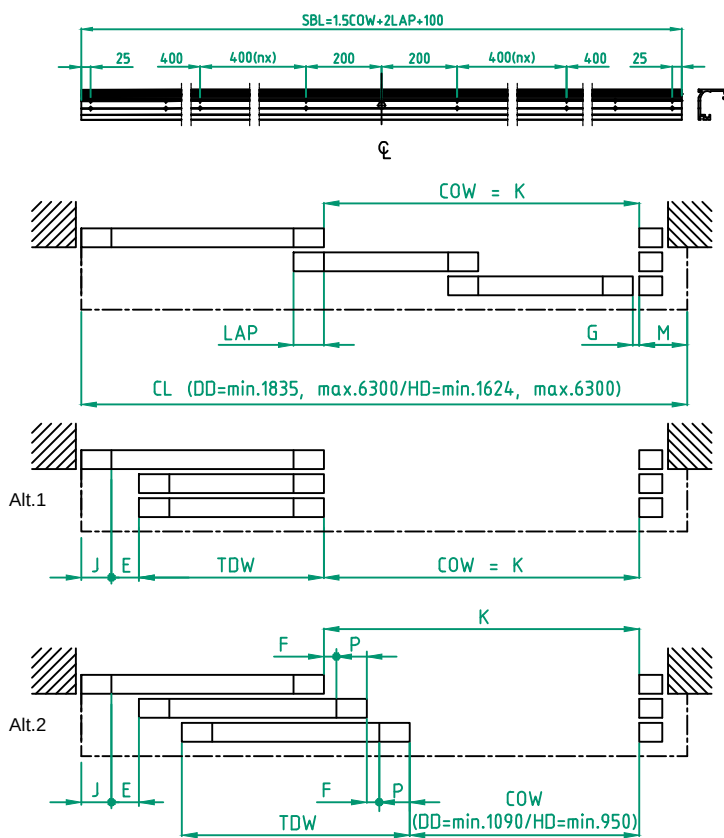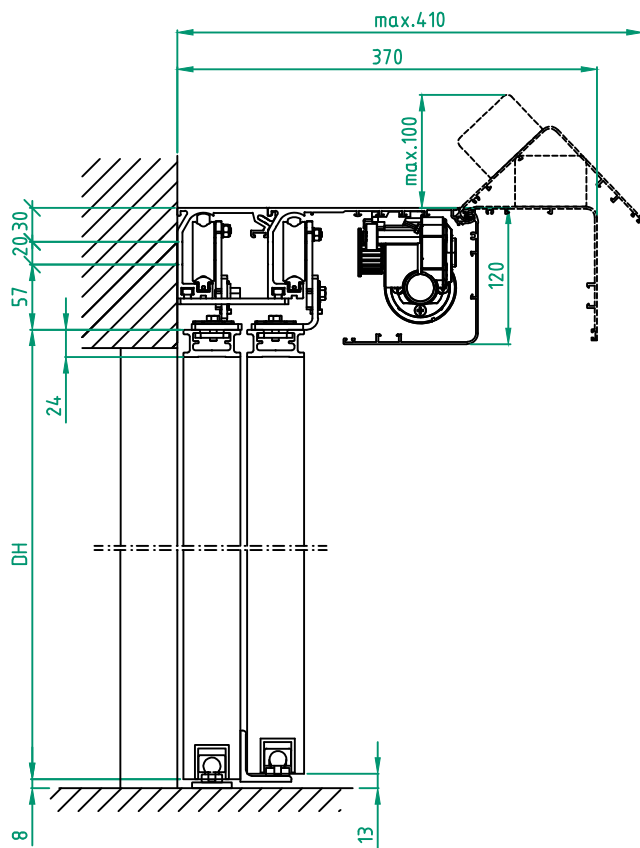

STATE WHEN ORDERING

COW = mm
CL = mm
SBL = mm
LAP = mm
G = mm
TDW = mm
Door weight = kg

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

	Alt. 1	Alt. 2	
Overlap (min. 20mm)	LAP	LAP	
Finger protection (min. 25mm)	E	E	
Finger protection (min. 25mm)	-	Fx2=	
Jamb width (min. 30mm)	J	J	
Cover overlap (min. 100mm)	M	M	
Leading edge width	-	Px2=	
Sum of above	Sum =.....		

Alt.1 COW = K K=
Alt.2 COW + 2P + 2F = K K= (K + 2LAP - G) / 2 = TDW TDW =

Cover length CL (CL - Sum) / 1,5 = = COW max.
Door travel COW (COW x1,5) + Sum = = CL min.

Customer:

Ref:

Door id:

Date:

Project No:







Sign:

Sliding door operator
ASSA ABLOY SL521-L
Art. No. 1019883

ASSA ABLOY

2.0

1020437-en

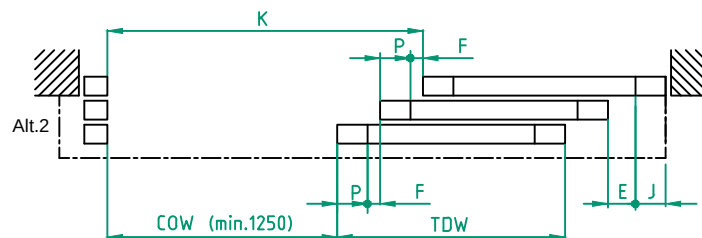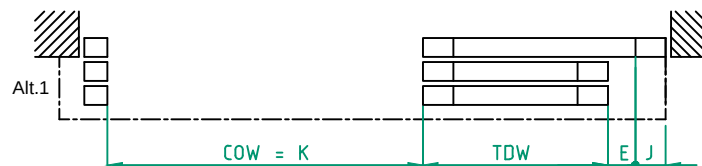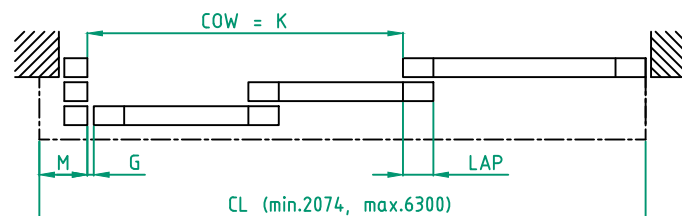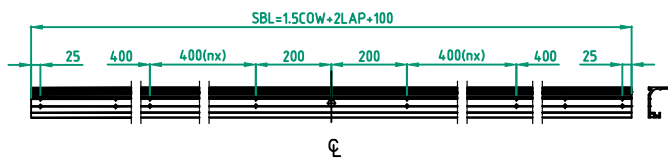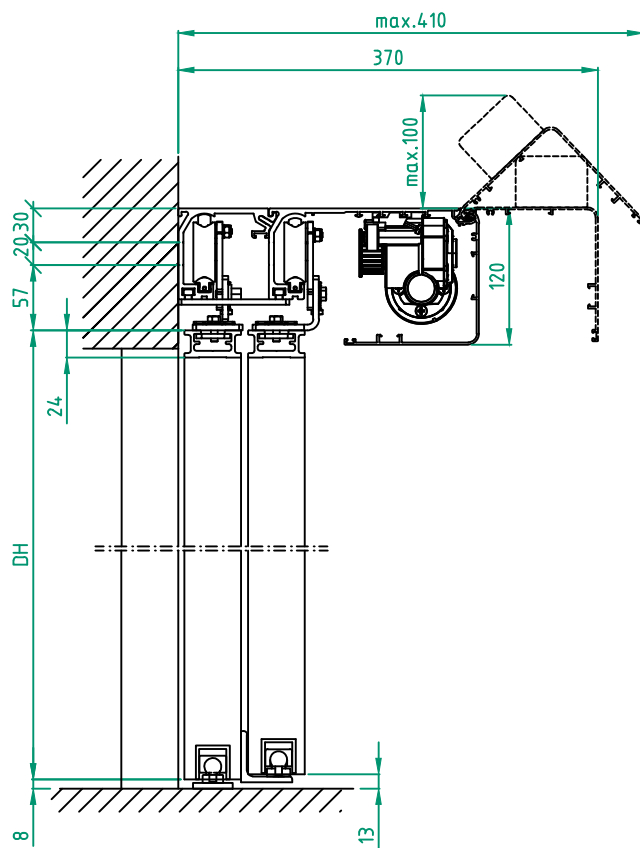

STATE WHEN ORDERING

COW = mm
CL = mm
SBL = mm
LAP = mm
G = mm
TDW = mm
Door weight = kg

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

	Alt.1	Alt.2	
Overlap (min. 20mm)	LAP	LAP	
Finger protection (min. 25mm)	E	E	
Finger protection (min. 25mm)	-	Fx2=	
Jamb width (min. 30mm)	J	J	
Cover overlap (min. 100mm)	M	M	
Leading edge width	-	Px2=	
Sum of above	Sum =.....		

Alt.1 COW = K	K=	
Alt.2 COW + 2P + 2F = K	K=	(K + 2LAP - G) / 2 = TDW TDW =
Cover length CL	(CL - Sum) / 1,5 =	= COW max.
Door travel COW	(COW x1,5) + Sum =	= CL min.

Customer:

Door id:

Project No:

Ref:

Date:

Sign:

Sliding door operator
ASSA ABLOY SL521-R
Art. No. 1019883

ASSA ABLOY

2.0 1020437-en