
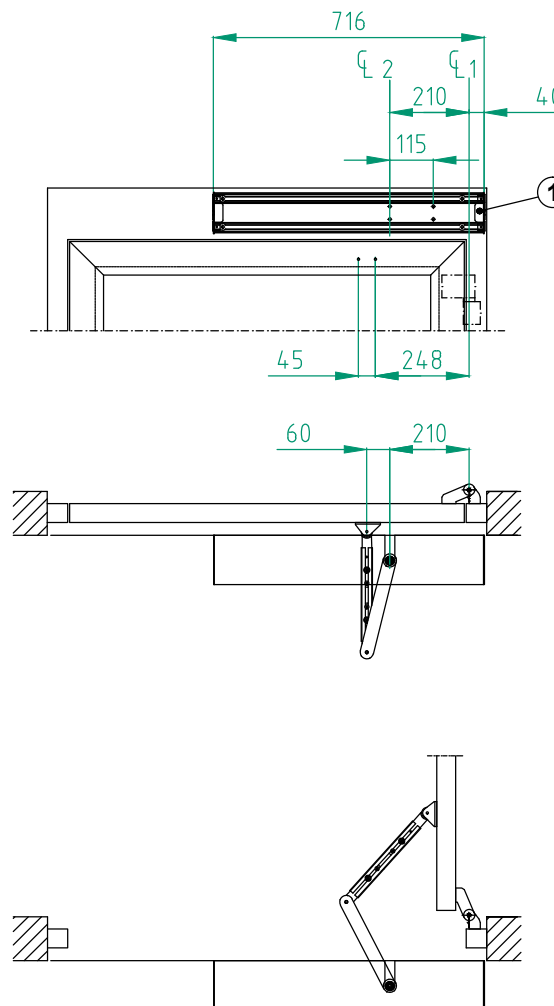


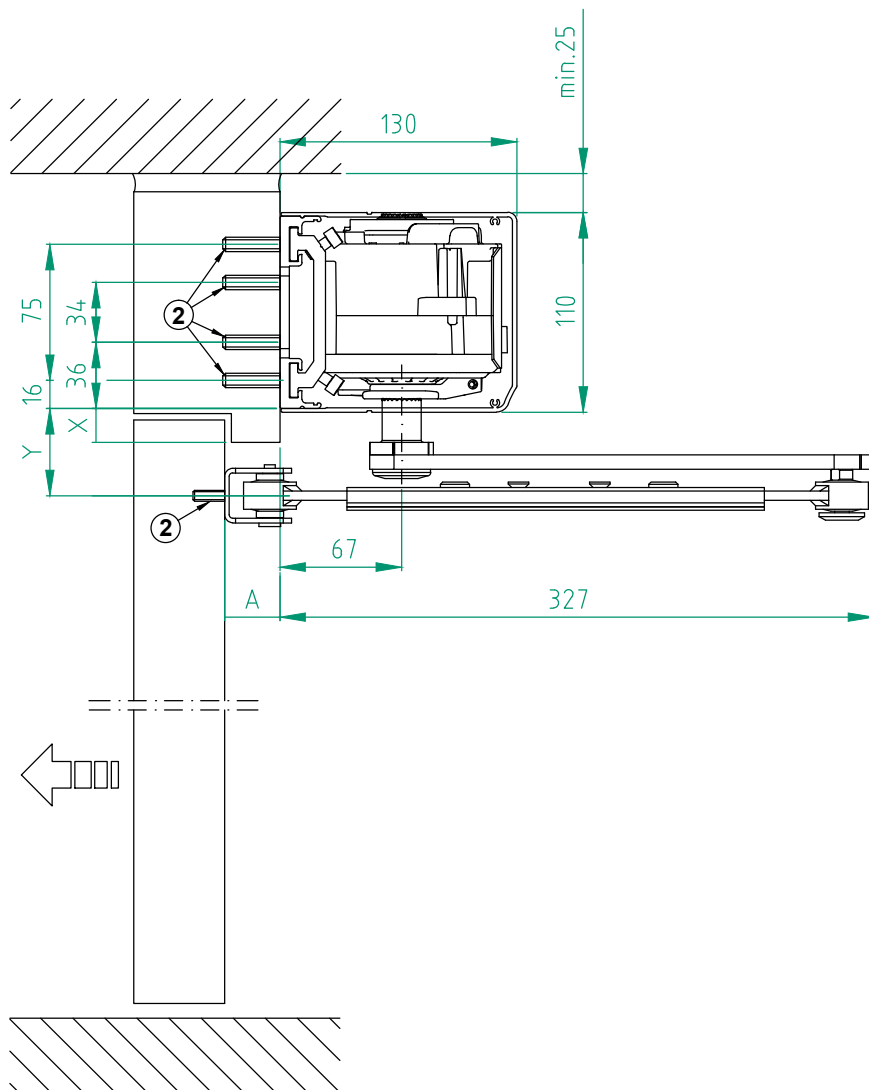

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
- Special anodized
- RAL
- Special powder coating
-

Cover end plates

- ☐ BK
- ☐ SI

Options see layers:

- ☐ Standard cover
 - ☐ Full length cover, CL = mm
R = mm
- If R is set to "0", no cutouts will be made.

- CL1 Hinges
- CL2 Operator drive shaft
- 1 Cable inlet
- 2 Reinforcements required in door leaf and at fixing holes

X	Y	Shaft extension
0-14	48	0
15-35	68	20
36-65	98	50
66-86	118	70

	A (HP)
Standard (Telescopic L=230)	0-100
Extension (Telescopic L=345)	100-215
Extension (2x Telescopic L=230+Joint part)	215-305

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Swing door operator
ASSA ABLOY SW200-1, PUSH-250
High Performance, DIN Left
Art. No. 1009927

ASSA ABLOY

11.0

1009927-en

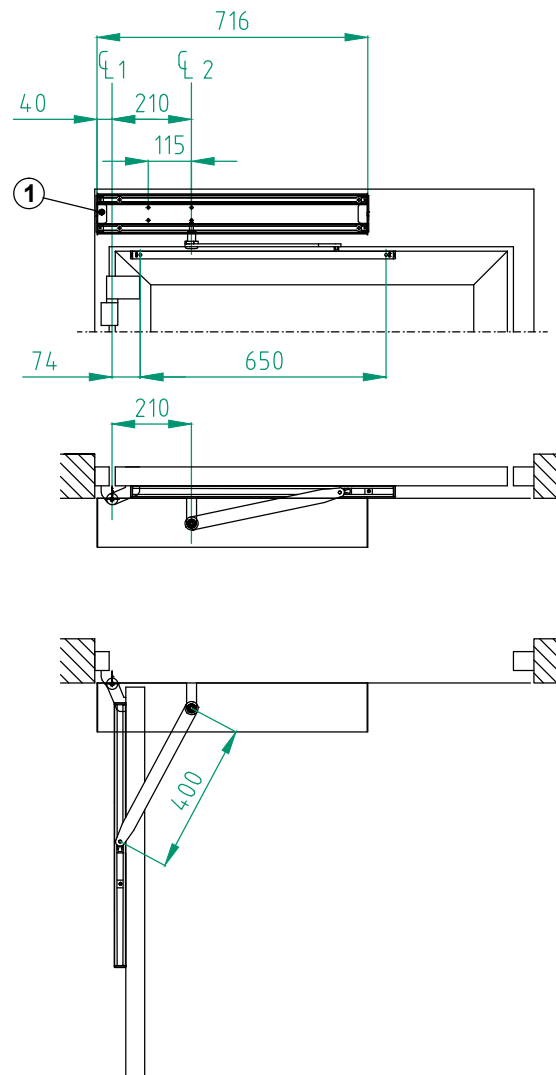

- 2 Reinforcements required in door leaf and at fixing holes



Y	Shaft extension
46	0
67	20
95	50
116	70

Swing door operator
ASSA ABLOY SW200-1, PULL
High Performance, DIN Left
Art. No. 1009927

ASSA ABLOY

11.0

1009927-en

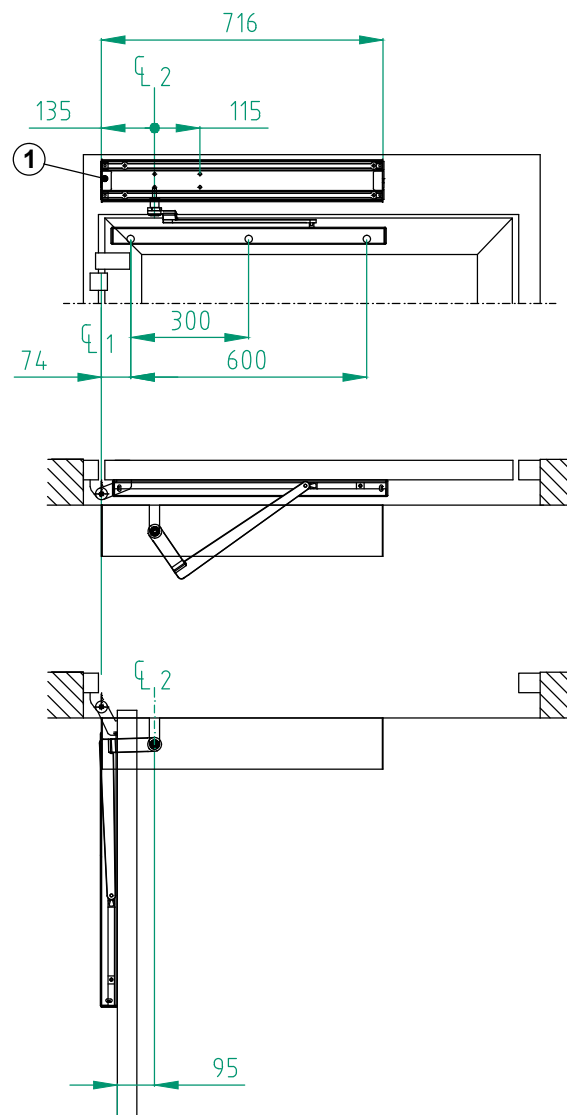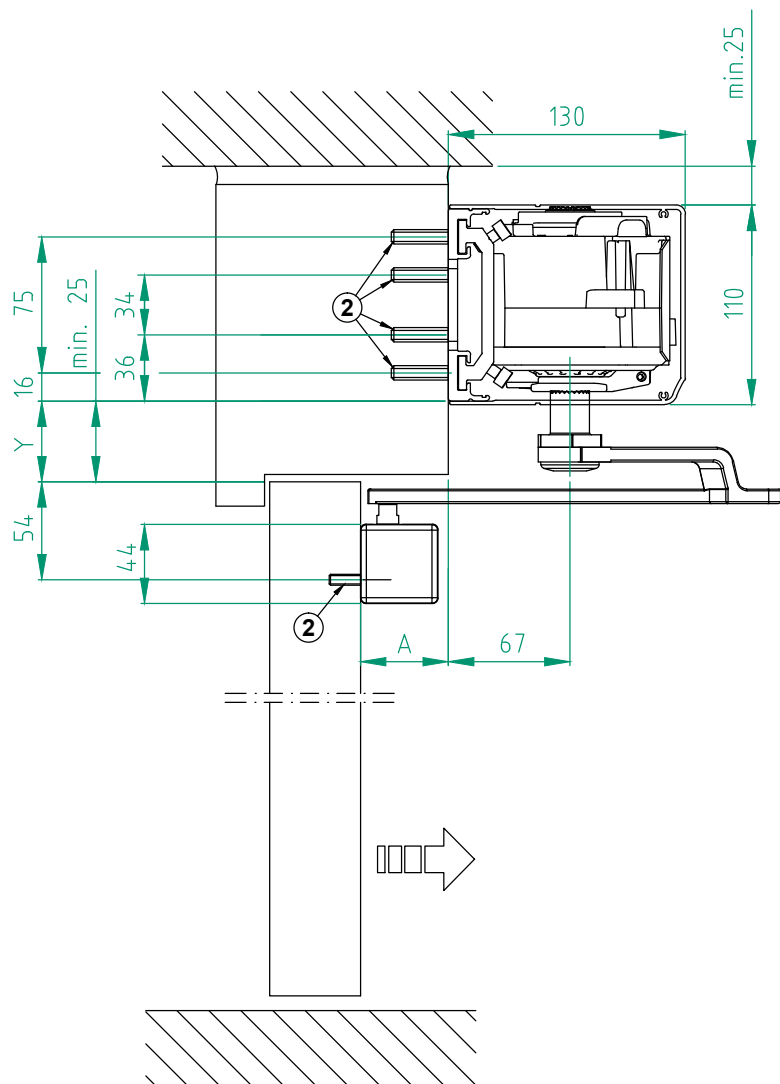

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating

Cover end plates

- ☐ BK
 - ☐ SI

Options see layers:

- ☐ Standard cover
☐ Full length cover, CL= mm
R= mm

If R is set to "0", no cutouts will be made.

- Ⓒ1** Hinges
Ⓒ2 Operator drive shaft
A Reveal A=0-130 mm
Note! Low speed closing and opening distance will increase.
 Max. door opening = 95°
 Min. door width = 750 mm
1 Cable inlet
2 Reinforcements required in door leaf and at fixing holes

Y	Shaft extension
46	0
67	20
95	50
119	70

Customer:

Door id:

Project No:

Ref:

Date:



Sign:

Swing door operator
ASSA ABLOY SW200-1, PAS
LE Performance, DIN Left
Art. No. 1009927

ASSA ABLOY

11.0

1009927-en

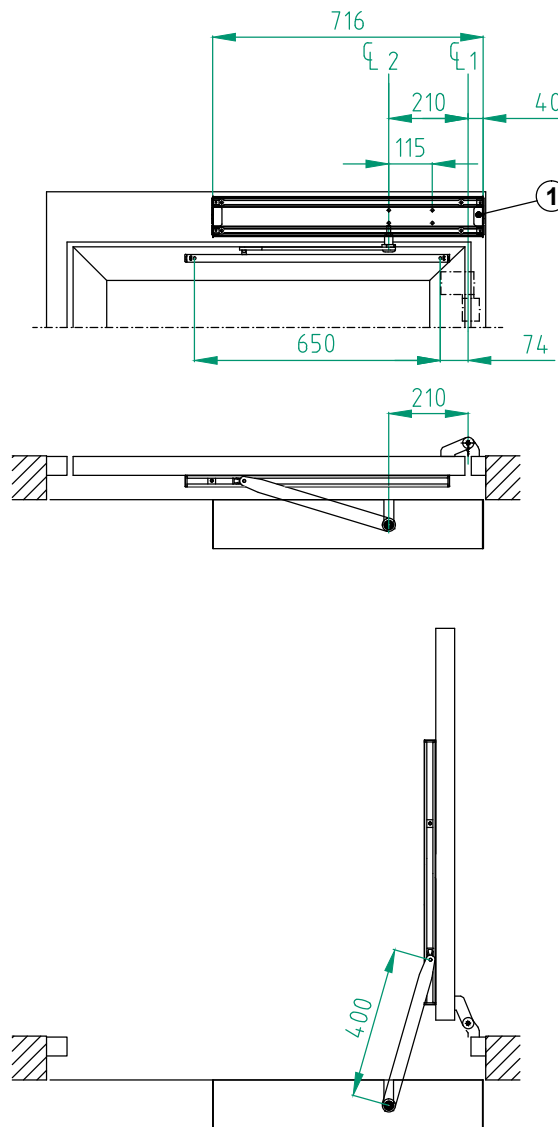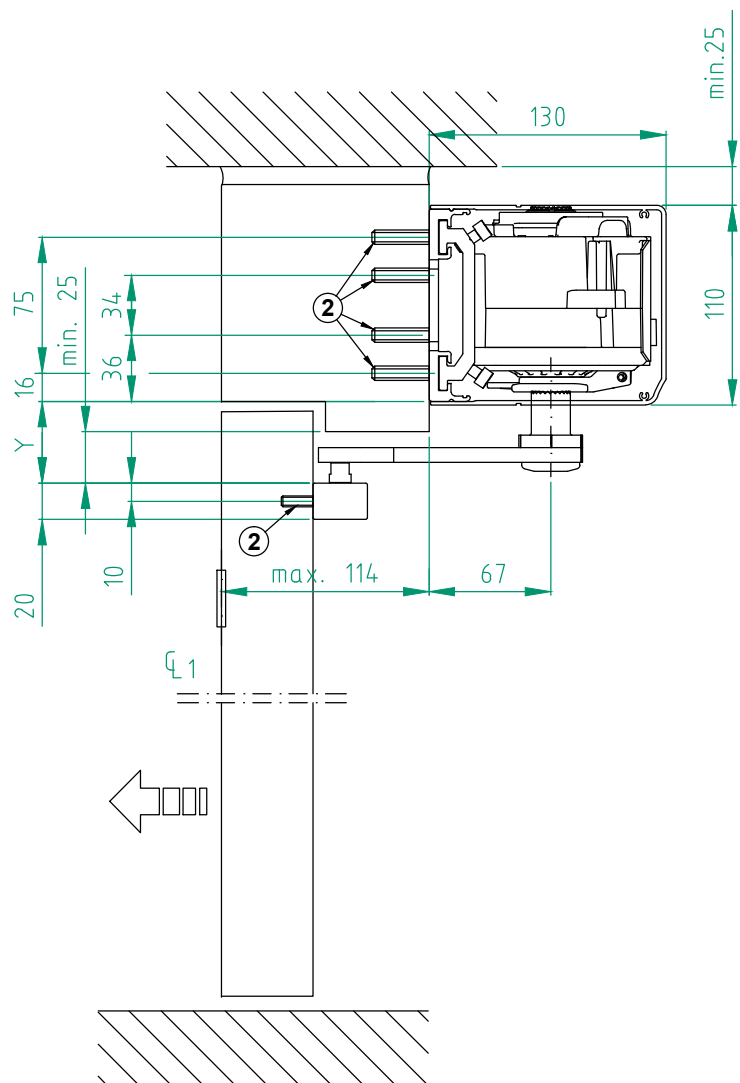

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

Options see layers:

- ☐ Standard cover
☐ Full length cover, CL = mm
R = mm
If R is set to "0", no cutouts will be made.

- CL1 Hinges
CL2 Operator drive shaft
Min. door width = 750 mm
1 Cable inlet
2 Reinforcements required in door leaf and at fixing holes

Y	Shaft extension
46	0
67	20
95	50
119	70

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swing door operator
ASSA ABLOY SW200-1, Sliding PUSH
High Performance, DIN Left
Art. No. 1009927

ASSA ABLOY

11.0

1009927-en

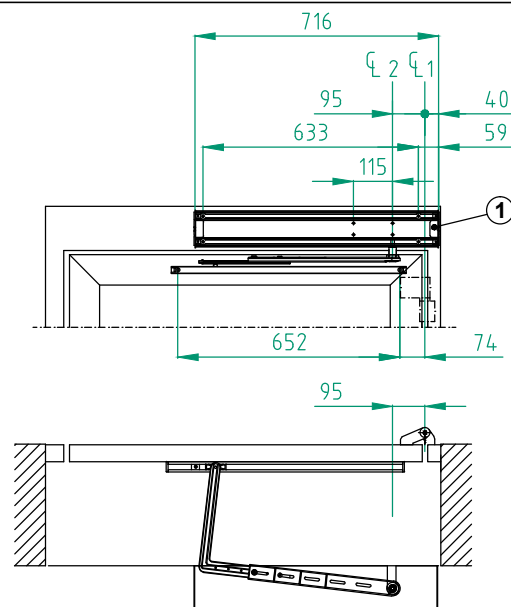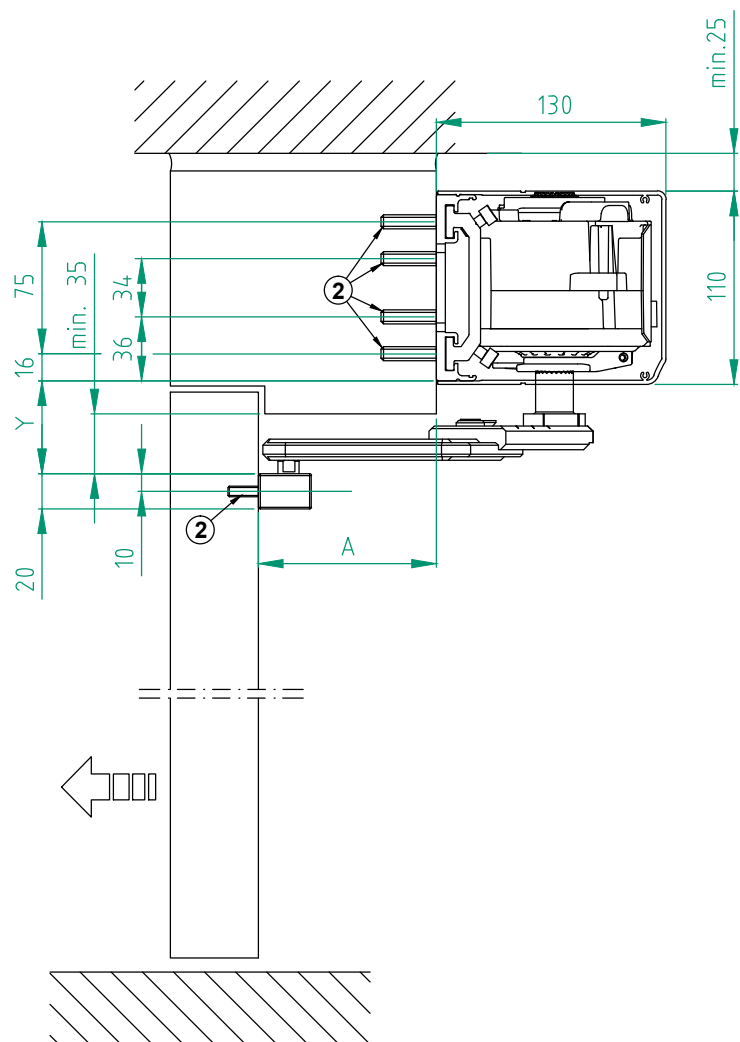

STATE WHEN ORDERING

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates


- ☐ BK
- ☐ SI

Options see layers:

☐ Standard cover
☐ Full length cover, CL = mm
S = mm
If S is set to "0", no cutouts will be made.

℄1	Hinges
℄2	Operator drive shaft
A	Reveal A=0-305 mm
	Min. door width = 750 mm
1	Cable inlet
2	Reinforcements required in door leaf and at fixing holes

Y	Shaft extension
59	0
79	20
109	50
129	70

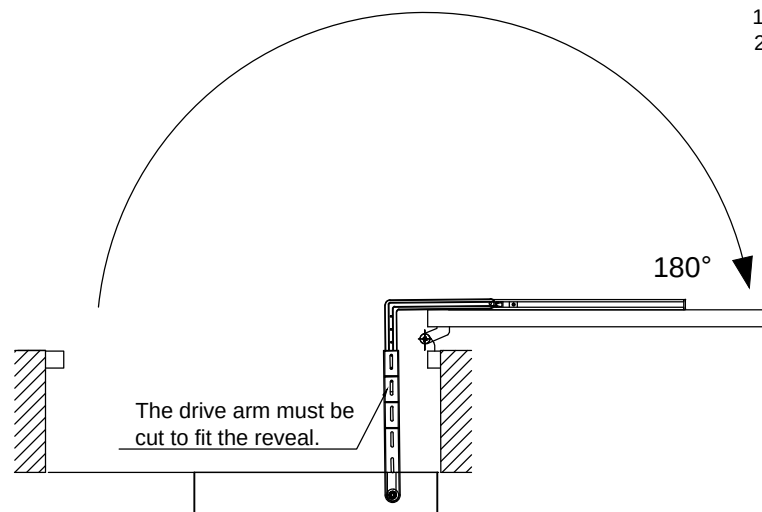

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swinger door operator
ASSA ABLOY SW200-1, PUSH 180°
LE Performance, DIN Left
Art. No. 1009927

ASSA ABLOY

11.0

1009927-en

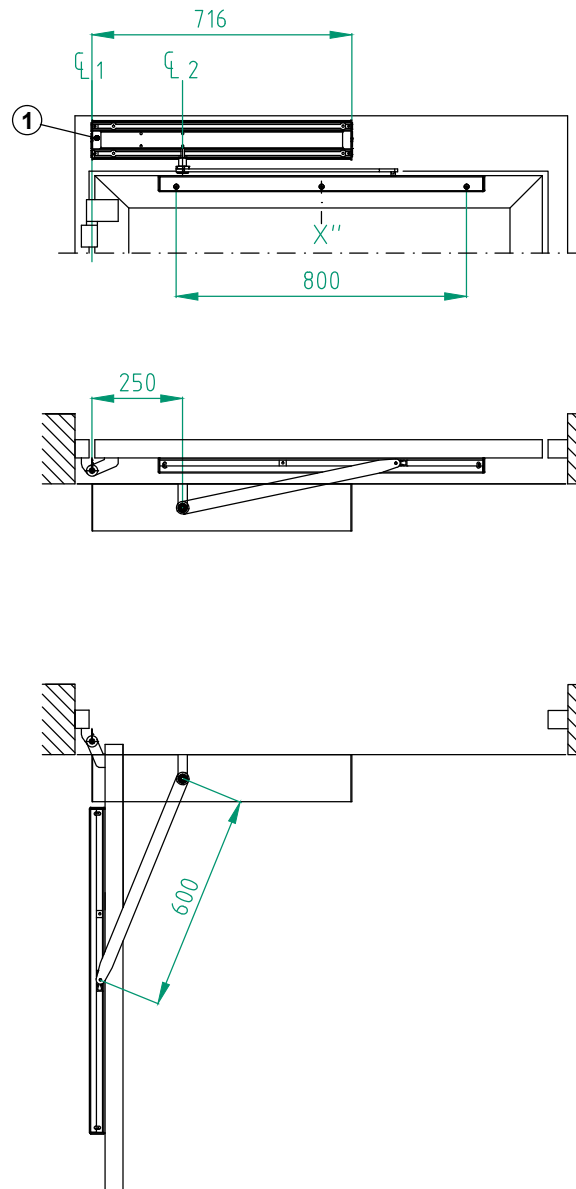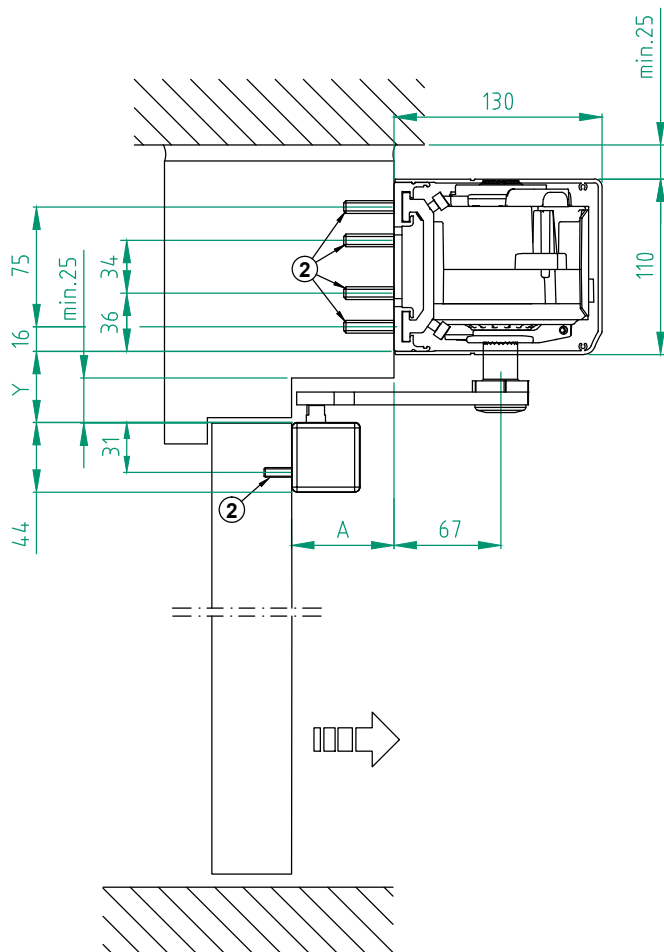

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating

Cover end plates

- ☐ BK
☐ SI

Options see layers:

- ☐ Standard cover
☐ Full length cover, CL = mm
R = mm
If R is set to "0", no cutouts will be made.
☐ Extended reveal spacer

- CL1 Hinges
CL2 Operator drive shaft
A Reveal A=-20-230 mm
X" Center of the guide shoe movement
Note! Low speed closing and opening distance will increase.
Max. door opening = 110°
Min. door width = 1050 mm
1 Cable inlet
2 Reinforcements required in door leaf and at fixing holes

Y	Shaft extension
46	0
67	20
95	50
116	70

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swing door operator
ASSA ABLOY SW200-1, PULL-600 250
High Performance, DIN Left
Art. No. 1009927

ASSA ABLOY

11.0

1009927-en

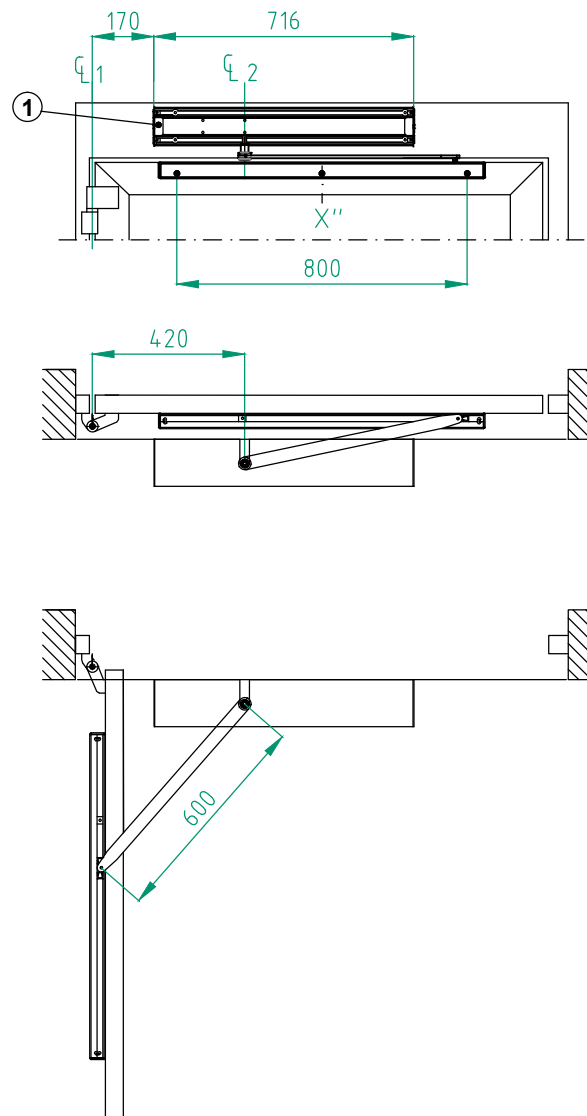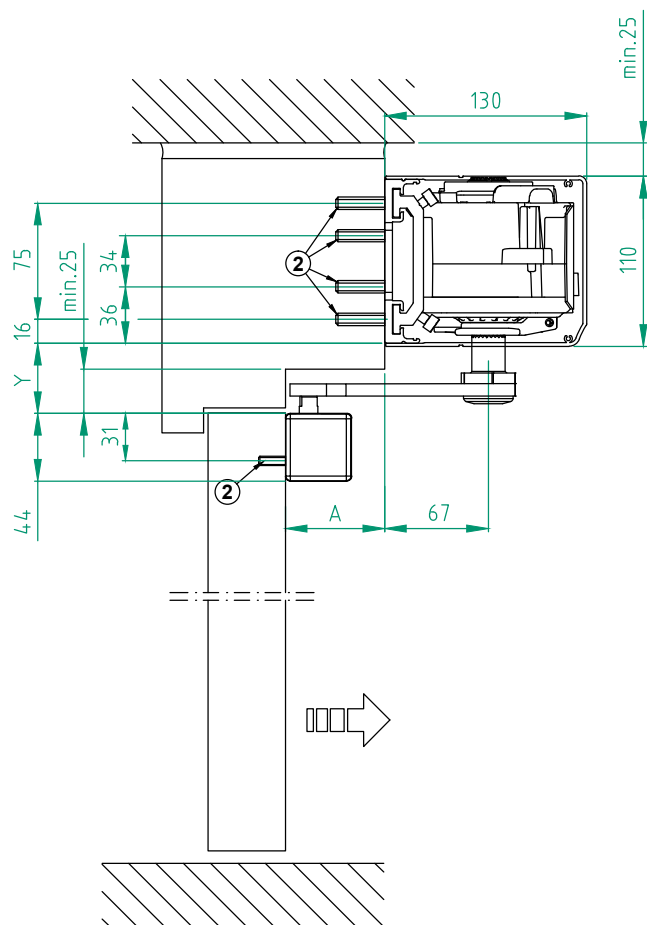

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

Options see layers:

- ☐ Standard cover
☐ Full length cover, CL = mm
R = mm
If R is set to "0", no cutouts will be made.
☐ Extended reveal spacer

- CL1 Hinges
CL2 Operator drive shaft
A Reveal A=-20-230 mm
X" Center of the guide shoe movement
Note! Low speed closing and opening distance will increase.
Max. door opening = 100°
Min. door width = 1200 mm
1 Cable inlet
2 Reinforcements required in door leaf and at fixing holes

Y	Shaft extension
46	0
67	20
95	50
116	70

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swing door operator
ASSA ABLOY SW200-1, PULL-600 420
High Performance, DIN Left
Art. No. 1009927

ASSA ABLOY

11.0

1009927-en

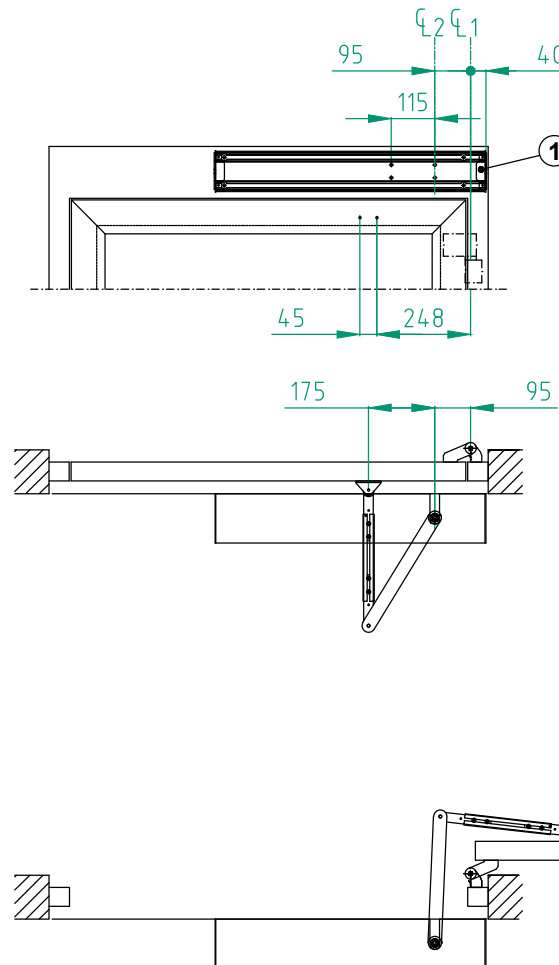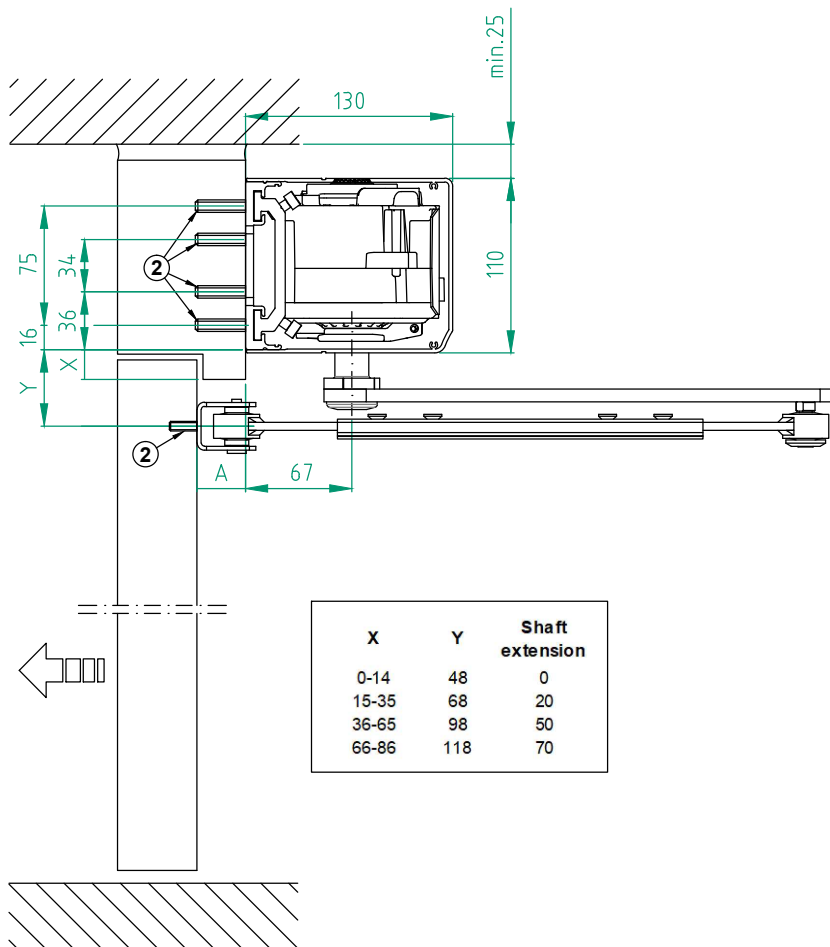

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
 Special anodized
 RAL
 Special powder coating

Cover end plates

- ☐ BK
☐ SI

Options see layers:

- ☐ Standard cover
☐ Full length cover, CL = mm
 S = mm

If S is set to "0", no cutouts will be made.

- C1 Hinges
 C2 Operator drive shaft
 1 Cable inlet
 2 Reinforcements required in door leaf and at fixing holes

Note: Arm system dip switch setting = 0101
 Spring pretension = 1.75 turn = 630°
 Full Power
 Reveal A = 0-100 mm
 Arm system PUSH-335 1007965
 Extension Telescopic part L=345 173005
 (if A = 50 to 100 mm)

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Swing door operator
 ASSA ABLOY SW200-1, PUSH-335

DIN Left
 Art. No. 1009927

ASSA ABLOY

11.0

1009927-en