
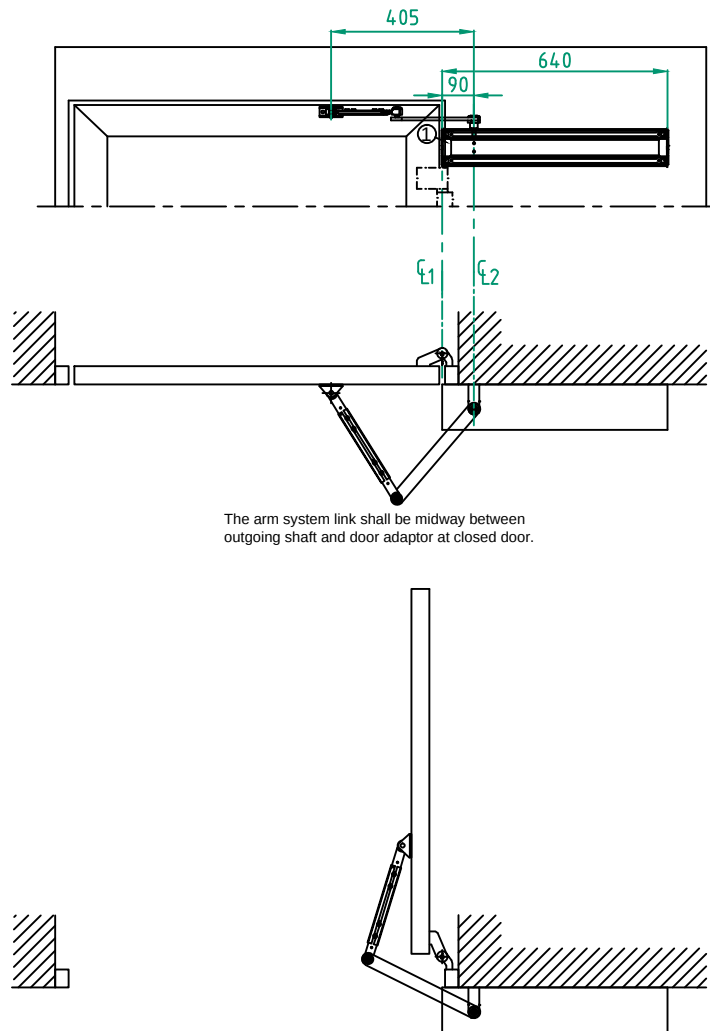


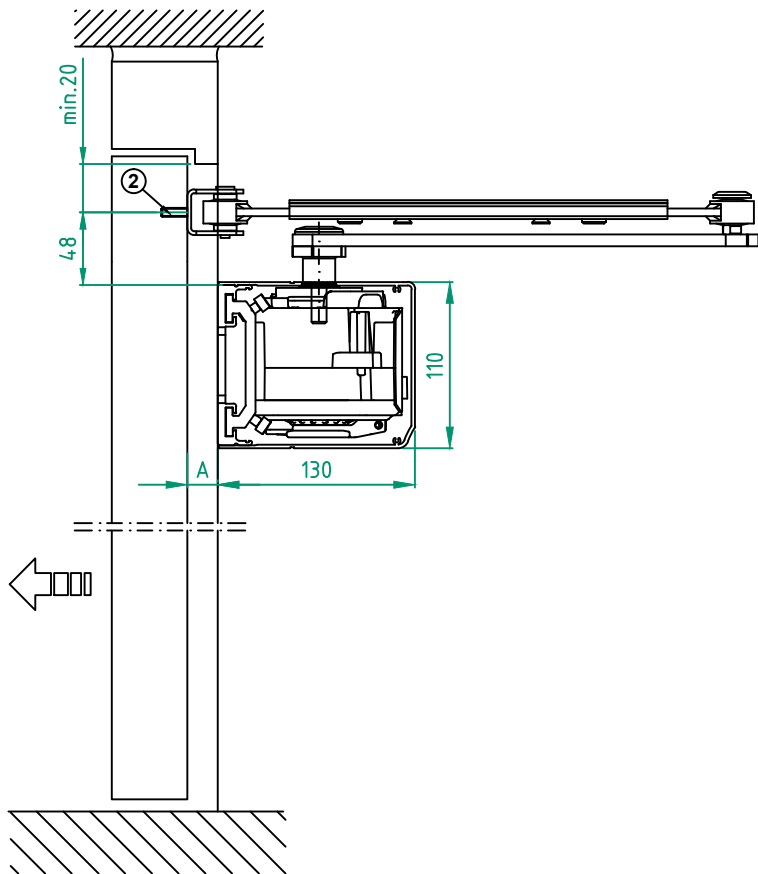

The arm system link shall be midway between outgoing shaft and door adaptor at closed door.

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

- ⌀1 Hinges
⌀2 Operator drive shaft
A A= 0-300mm

- 1 Cable inlet
2 Reinforcements required

Accessories needed:

- Arm system PUSH-335 1007965BK/SI
- Telescopic part 173005BK/SI

Note: Door size 4

DIP switch setting:

ON=1 OFF=0			
AS 1	AS 2	AS 3	AS 4
DIP 5	DIP 6	DIP 7	DIP 8
1	1	1	0

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swing door operator
ASSA ABLOY SW200 Shorty-1, PUSH-335
Side mounted, DIN Left
Art. No. 1016931

ASSA ABLOY

4.0

1017299-en

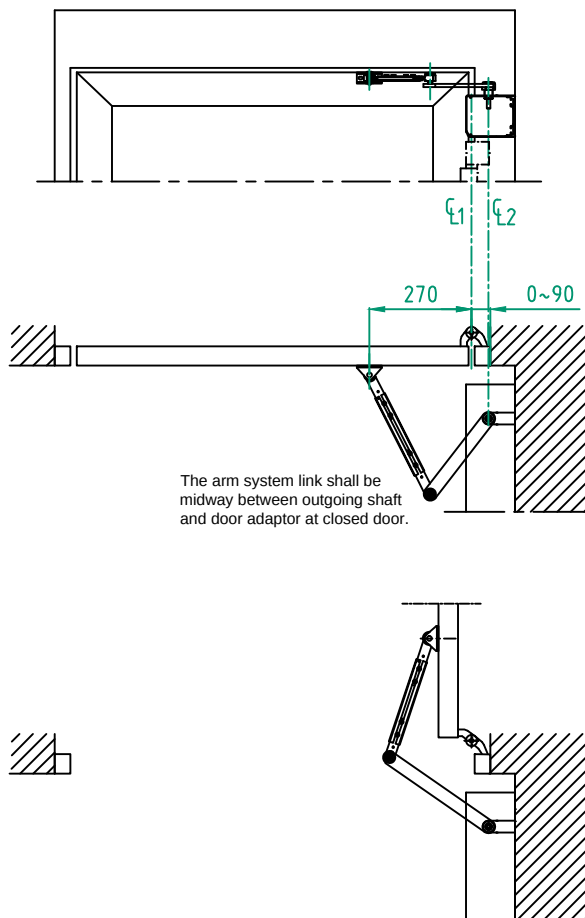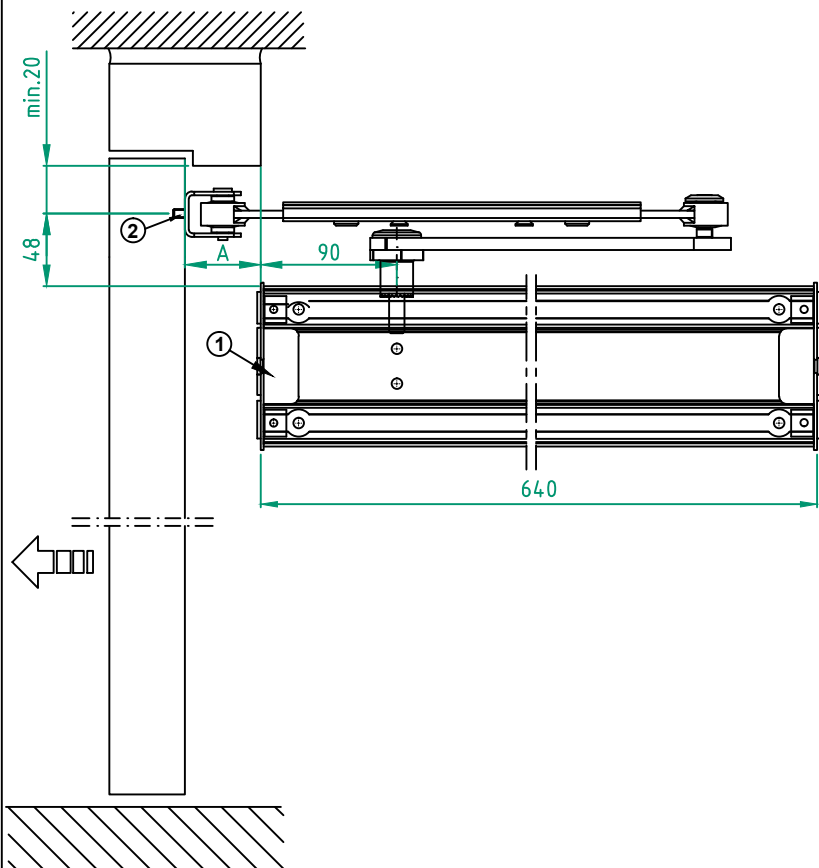

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating

Cover end plates

- ☐ BK
☐ SI

- ⌀1 Hinges
⌀2 Operator drive shaft
A A= 0-300 mm

- 1 Cable inlet
2 Reinforcements required

Accessories needed

- Use arm system PUSH-335 1007965BK/SI

Note: Door size 4

DIP switch setting:

ON=1 OFF=0			
AS 1	AS 2	AS 3	AS 4
DIP 5	DIP 6	DIP 7	DIP 8
1	1	1	0

Customer: _____

Door id: _____

Project No: _____

Ref: _____



Date: _____

Sign: _____

Swing door operator
ASSA ABLOY SW200-1, PUSH-335
Corridor mounted, DIN Left
Art. No. 1016931

ASSA ABLOY

4.0 1017299-en

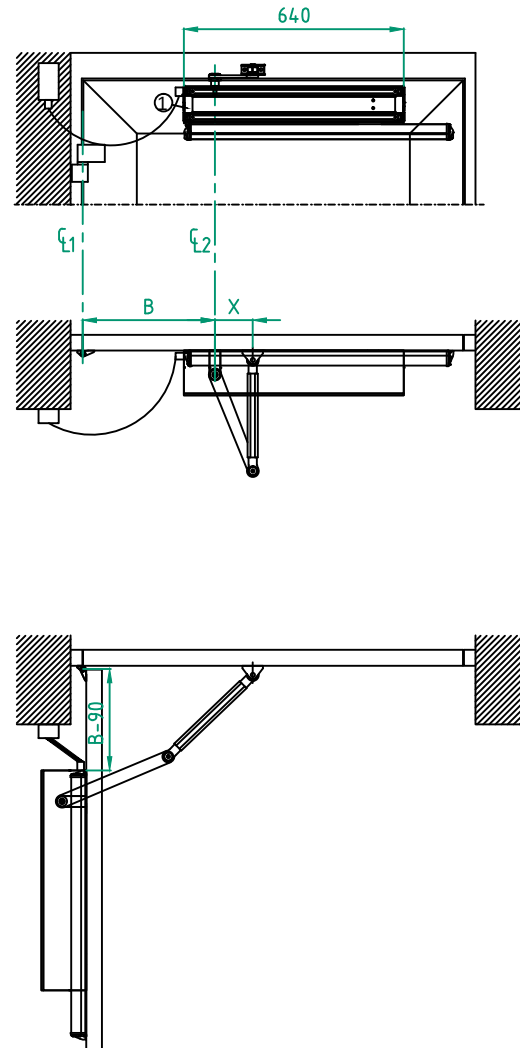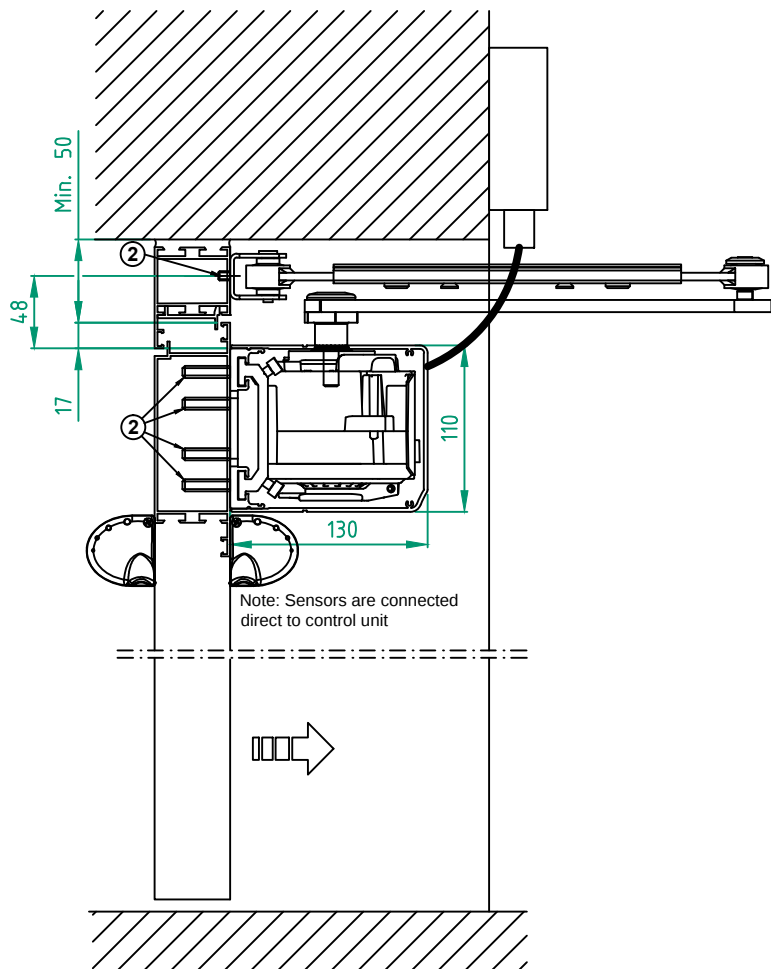

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
☐ Special anodized
☐ RAL
☐ Special powder coating
☐

Cover end plates

- ☐ BK
☐ SI

- ⌀1 Hinges
 ⌀2 Operator drive shaft

- 1 Cable inlet
 2 Reinforcements required

Accessories needed:

- Door mounting kit 100132
- PUSH-335 1007965BK/SI

Note: Door size 7

DIP switch setting:

ON=1 OFF=0			
AS 1 DIP 5	AS 2 DIP 6	AS 3 DIP 7	AS 4 DIP 8
0	1	0	1

B	X
210#	60
245	70
280	80
315	90
350	100
385	110

If door opening angle is < 86°,
 use Arm system 1007241BK/SI

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swing door operator
 ASSA ABLOY SW200-1, PUSH-335
 Door mounted, DIN Left
 Art. No. 1016931

ASSA ABLOY

4.0

1017299-en

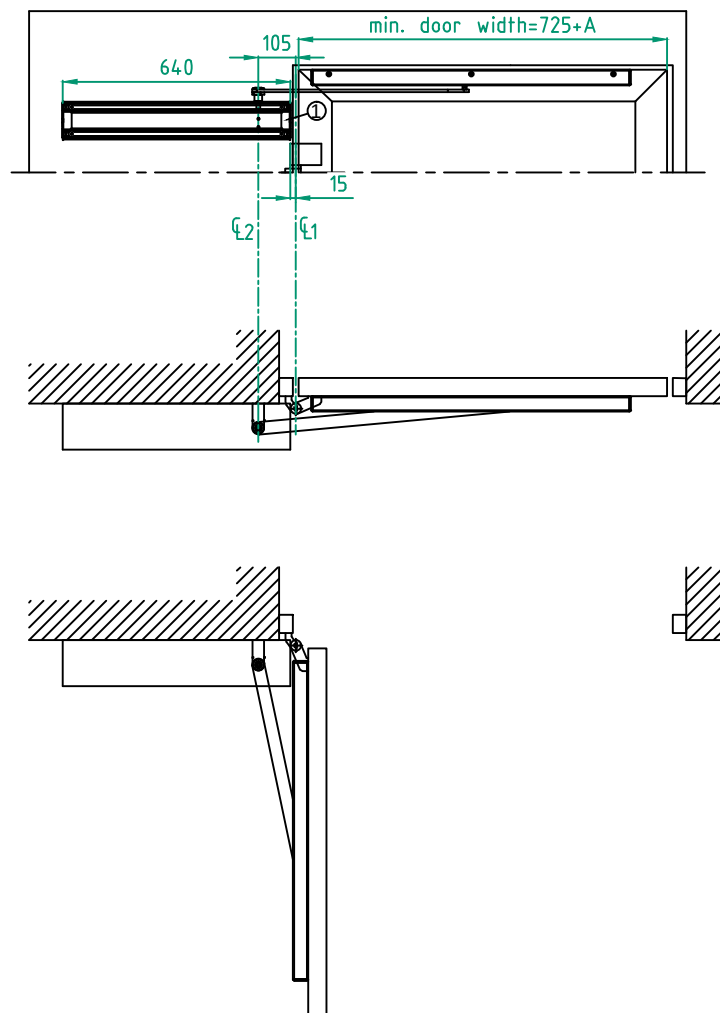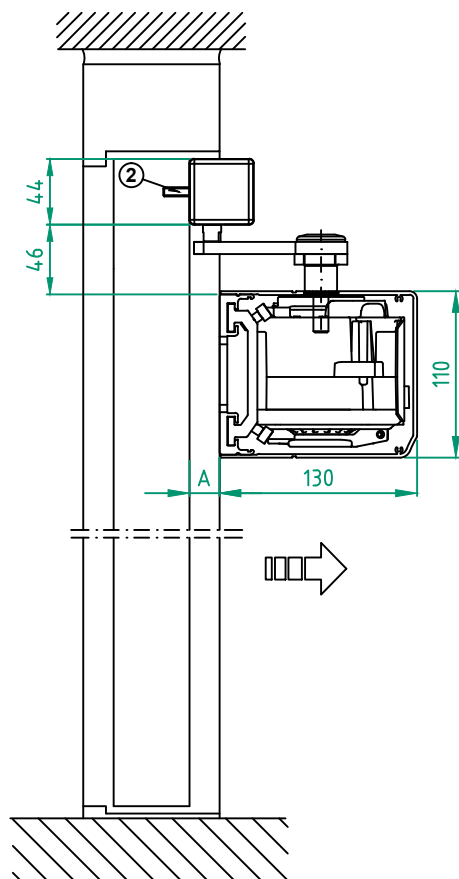

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

- ⌀1 Hinges
⌀2 Operator drive shaft
A A= 0-130 mm

- 1 Cable inlet
2 Reinforcements required

Accessories needed:

- Arm system PULL-600 1014729BK/SI

Note: Door size 3

DIP switch setting:

ON=1 OFF=0			
AS 1 DIP 5	AS 2 DIP 6	AS 3 DIP 7	AS 4 DIP 8
1	1	1	0

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swing door operator
ASSA ABLOY SW200 Shorty-1, PULL-600
Side mounted, DIN Left
Art. No. 1016931

ASSA ABLOY

4.0

1017299-en

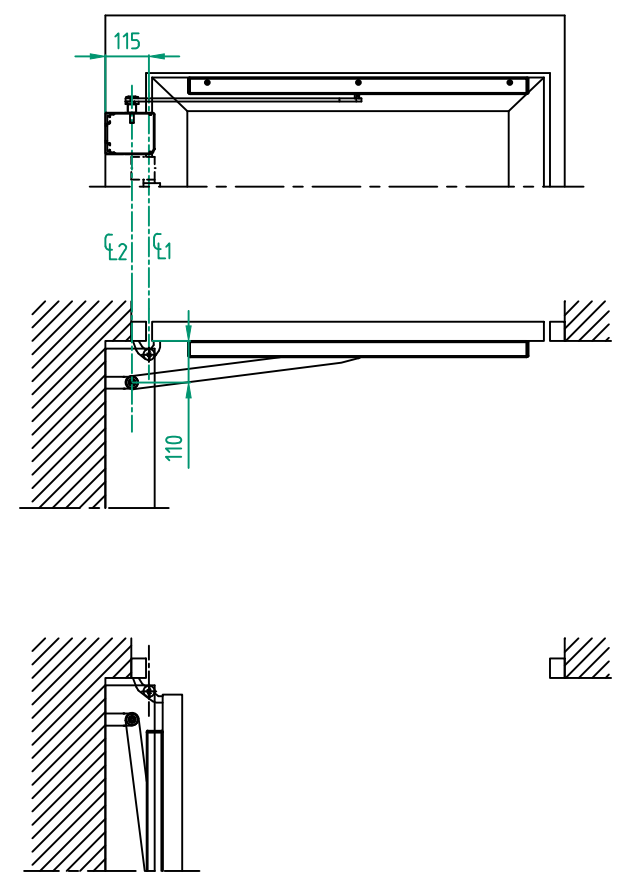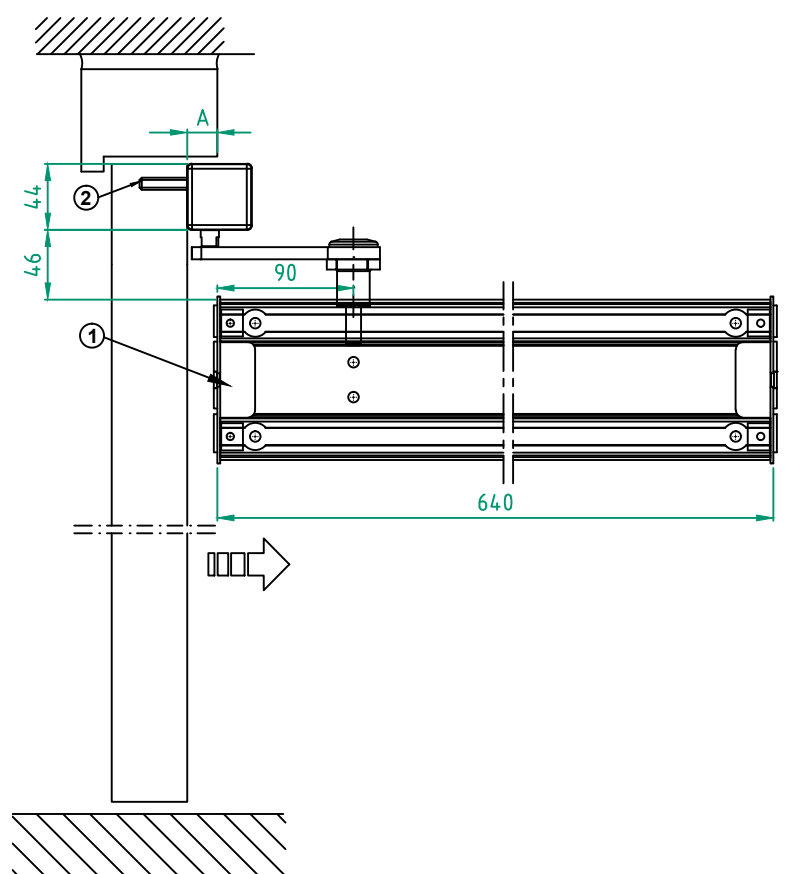

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
- Special anodized
- RAL
- Special powder coating
-

Cover end plates

- ☐ BK
- ☐ SI

- $\varnothing 1$ Hinges
- $\varnothing 2$ Operator drive shaft
- A A= 20-130 mm

- 1 Cable inlet
- 2 Reinforcements required

Accessories needed:

- Arm system PULL-600 1014729BK/SI

Note: Door size 4

DIP switch setting:

ON=1 OFF=0			
AS 1	AS 2	AS 3	AS 4
DIP 5	DIP 6	DIP 7	DIP 8
1	1	1	0



Customer:
Door id:
Project No:

Ref:
Date:
Sign:

Swing door operator
ASSA ABLOY SW200-1, PULL-600
Corridor mounted, DIN Left
Art. No. 1016931

ASSA ABLOY

4.0 1017299-en

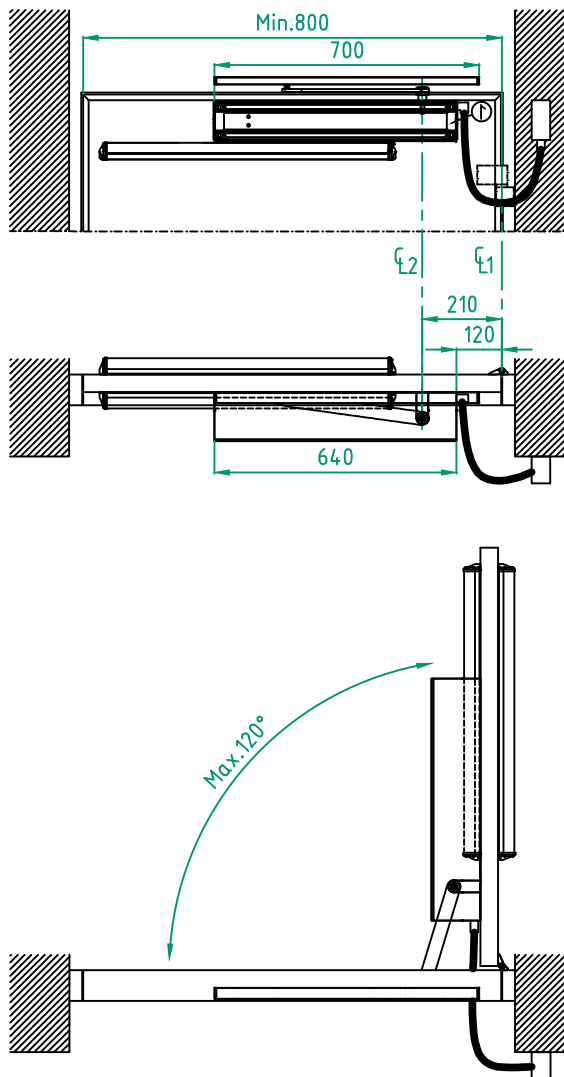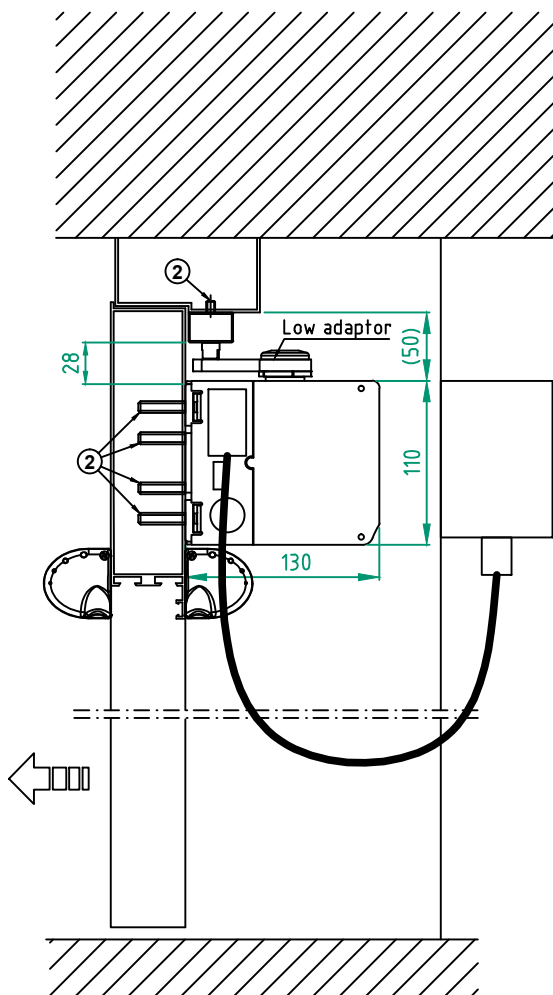

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

⌀1 Hinges

⌀2 Operator drive shaft

1 Cable inlet

2 Reinforcements required

Accessories needed:

- Door mounting kit 100132
- PULL-400 Slim 1008401 BK/SI
- Lower adaptor 1010296 BK/SI

Note: Door size 4

Note: Sensors are connected direct to control unit

DIP switch setting:

ON=1 OFF=0			
AS 1	AS 2	AS 3	AS 4
DIP 5	DIP 6	DIP 7	DIP 8
0	1	0	1

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Swing door operator
ASSA ABLOY SW200 shorty-1, PULL-400 Slim
Door mounted, DIN Left
Art. No. 1016931

ASSA ABLOY


4.0

1017299-en

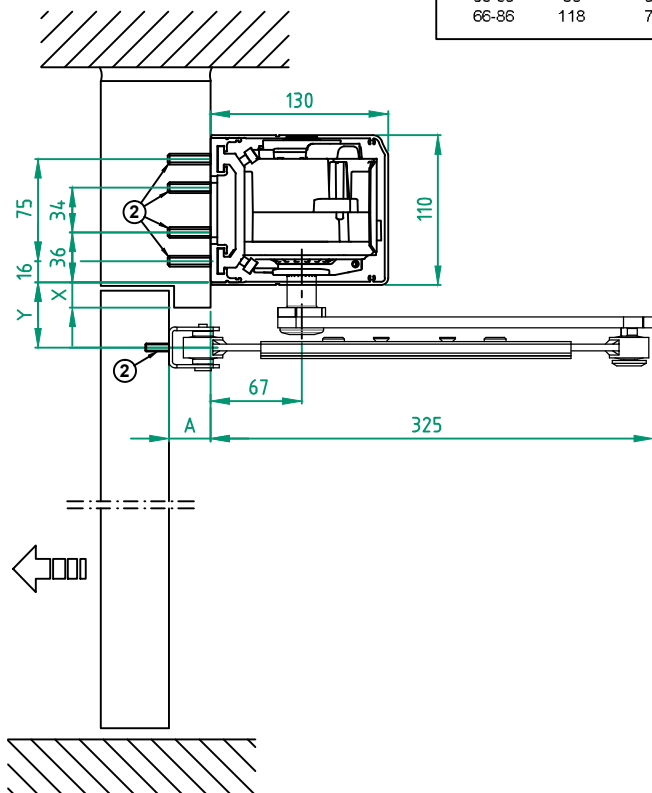

Standard (Telescopic L=230)	A
Extension (Telescopic L=345)	0-115
Extension (2xTelescopic L=230)+Joint part	115-250
	250-305

X	Y	Shaft extension
0-14	48	0
15-35	68	20
36-65	98	50
66-86	118	70

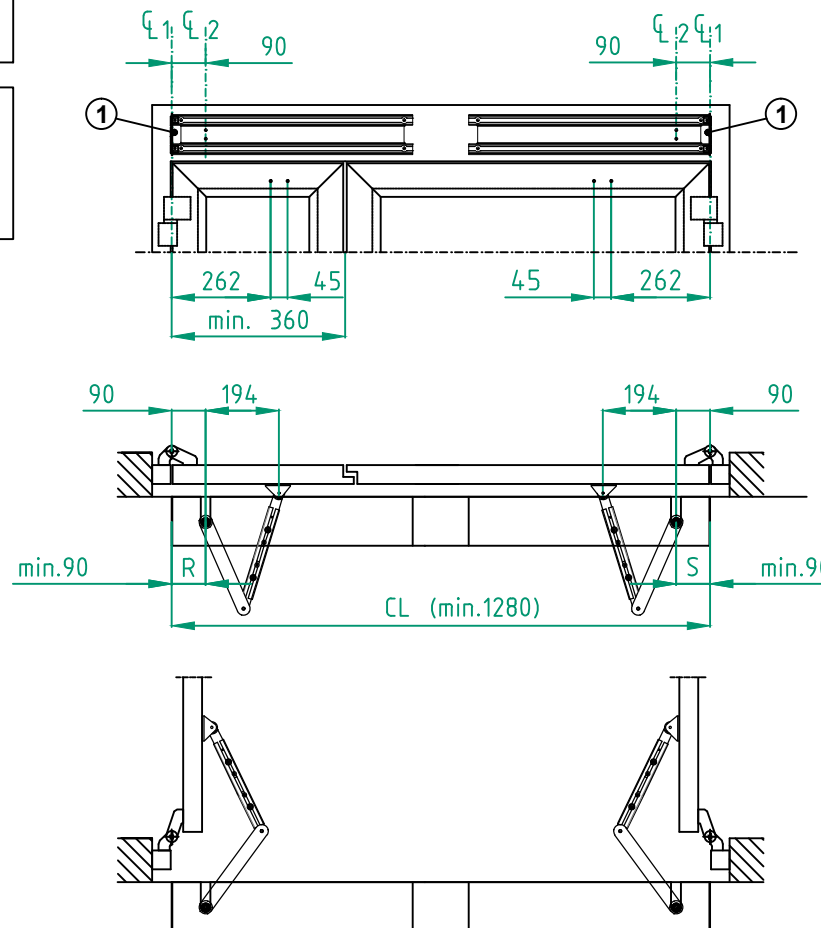

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
☐ Special anodized
☐ RAL
☐ Special powder coating
☐

Cover end plates

- ☐ BK
☐ SI

CL1 Hinges

CL2 Operator drive shaft

CL = mm

R = mm

S = mm

If R and S are set to "0", no cutouts will be made.

1 Cable inlet

2 Reinforcements required

Accessories needed:

- Arm system PUSH-250

Note! Cover kit 1021230BK/SI has to be cut to size at installation.

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Swing door operator
 ASSA ABLOY SW200 Shorty-2, PUSH-250

Art. No. 1016931



ASSA ABLOY

4.0

1017299-en

	A
Standard (Telescopic L=230)	0-115
Extension (Telescopic L=345)	115-250
Extension (2xTelescopic L=230)+Joint part	250-305

X	Y	Shaft extension
0-14	48	0
15-35	68	20
36-65	98	50
66-86	118	70

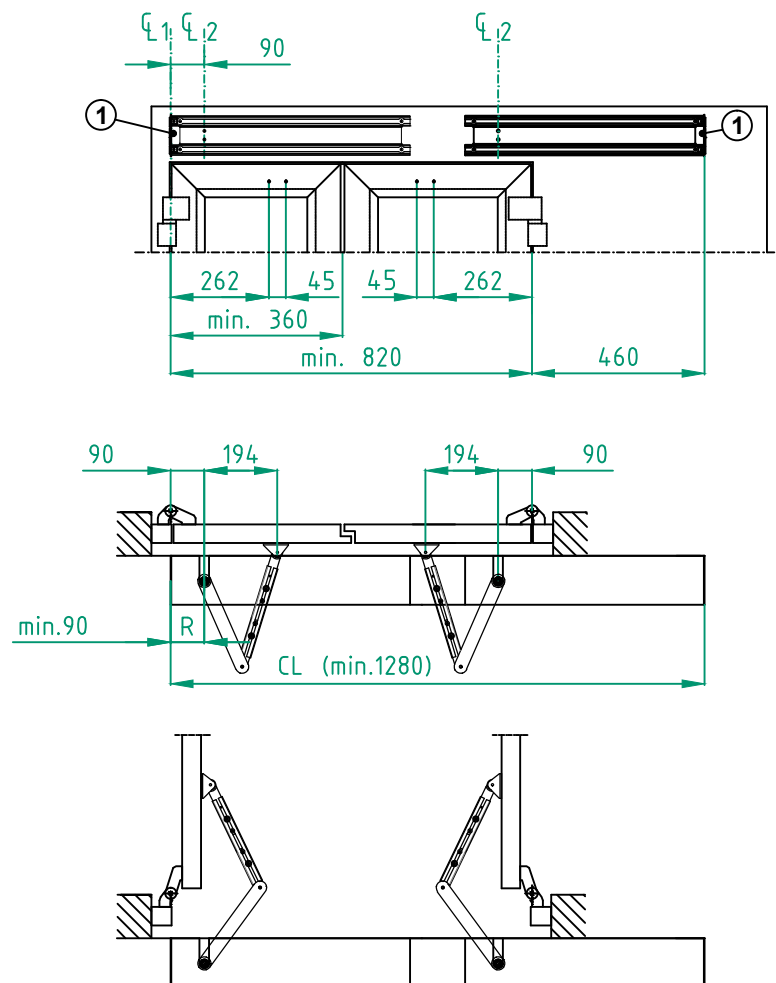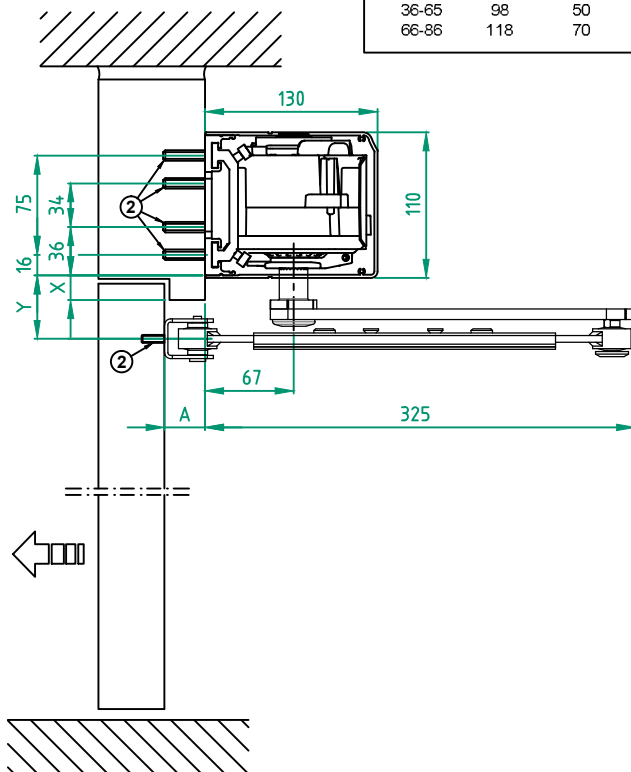

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

- CL₁ Hinges
CL₂ Operator drive shaft

CL = mm
R = mm
S = mm
If R and S are set to "0", no cutouts will be made.

- 1 Cable inlet
2 Reinforcements required

Accessories needed:
- Arm system PUSH-250

Note! Cover kit 1021230BK/SI has to be cut to size at installation.

Customer:

Ref:

Door id:

Date:

Project No:

Sign:



Swing door operator
ASSA ABLOY SW200 Shorty-2, PUSH-250

Art. No. 1016931

ASSA ABLOY

4.0

1017299-en

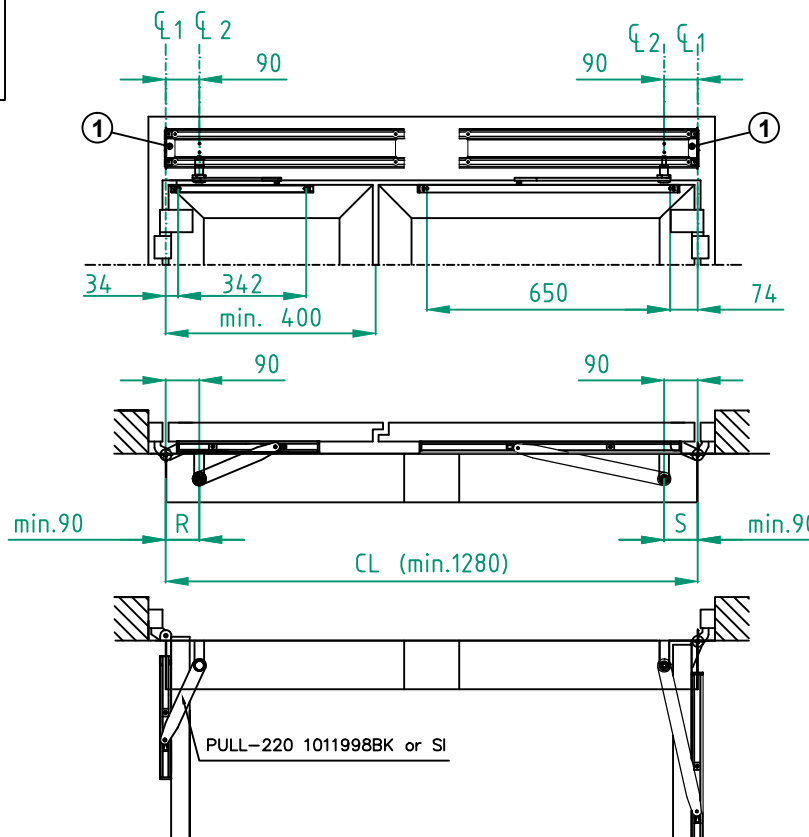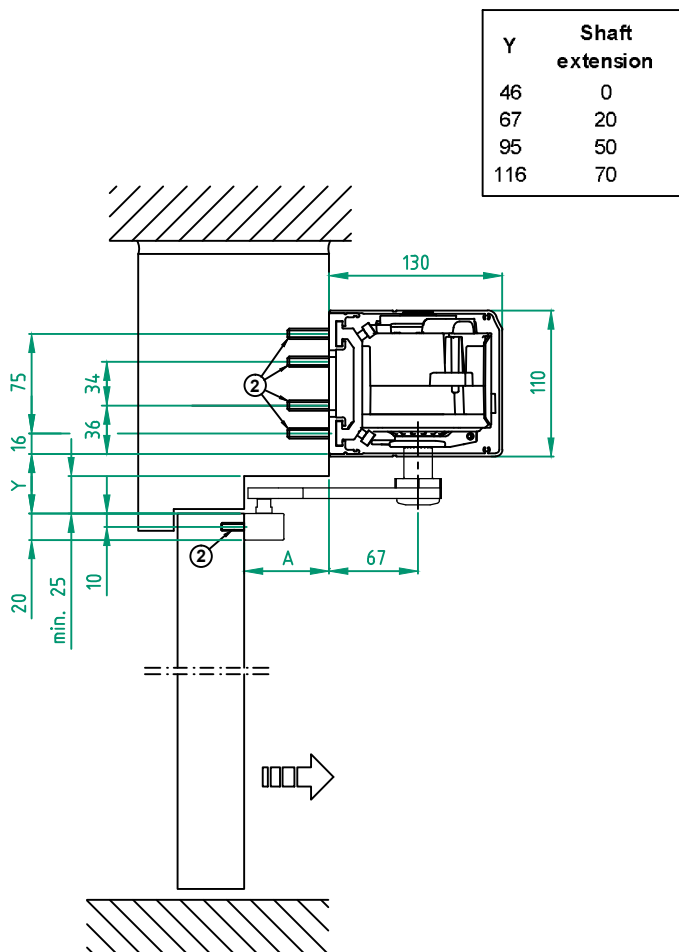

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
☐ Special anodized
☐ RAL
☐ Special powder coating

Cover end plates

- ☐ BK
☐ SI

CL₁ Hinges

CL₂ Operator drive shaft

A = -20 - 65 mm

Note! Low speed closing and opening distance will increase.

Max. door opening = 180°

Min. door width = 400 mm (PULL-220)

Min. door width = 750 mm (PULL-400)

CL = mm

R = mm

S = mm

If R and S are set to "0", no cutouts will be made.

- 1 Cable inlet
 2 Reinforcements required

Accessories needed:

- Arm system PULL-220 and PULL-400

Note! Cover kit 1021230BK/SI has to be cut to size at installation.

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Swing door operator
 ASSA ABLOY SW200 Shorty-2, PULL-220 and PULL-400

Art. No. 1016931

ASSA ABLOY

4.0

1017299-en