
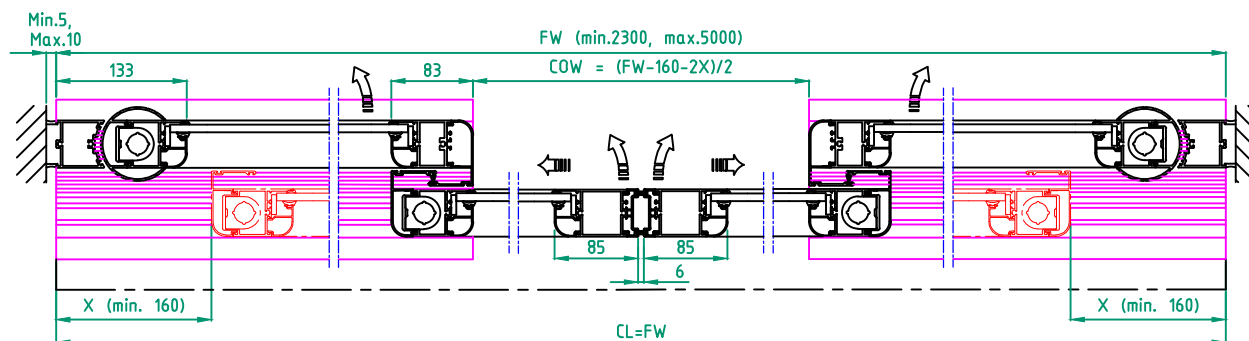
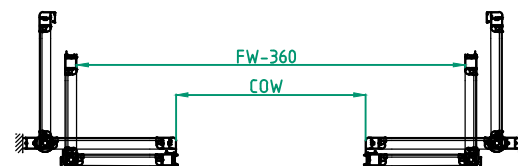
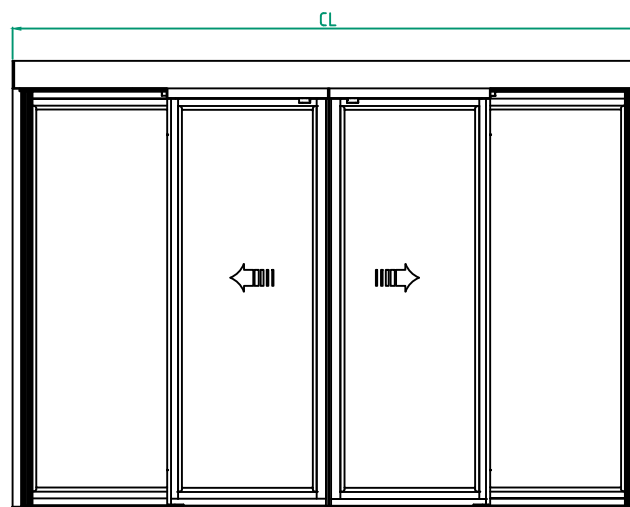


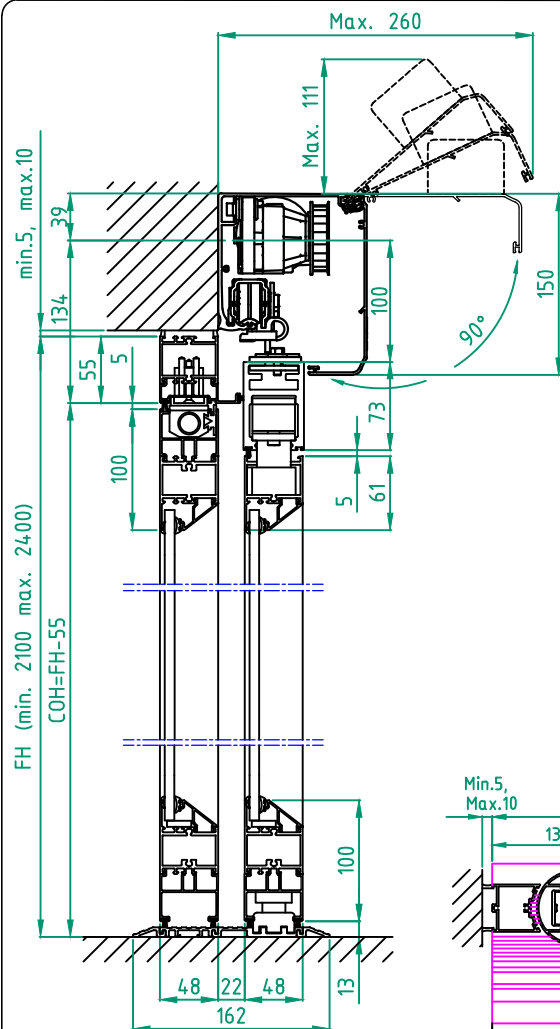

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026
Glass code:

☐ Infill panel:

Combination of glass and infill panel.
Midrail must be selected and the infill panel
will be placed below the midrail. Choose
glass type above. The thickness of the infill
panel will correspond with the glass
thickness (6 or 10 mm glass will generate
8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 11.3 m²
If 40 mm glass FW x FH = max. 9.9 m²

Installation

☐ Floor heating
☐ Sensor
☐ Other

Notes:

Customer:

Ref:

Door id:

Date:

Project No:




Sign:

Automatic door system
ASSA ABLOY Frame break-out 4 Panel wall mounted
Art. No. 1009382-4PB-15
ASSA ABLOY SL500

ASSA ABLOY

7.0

1009382-en

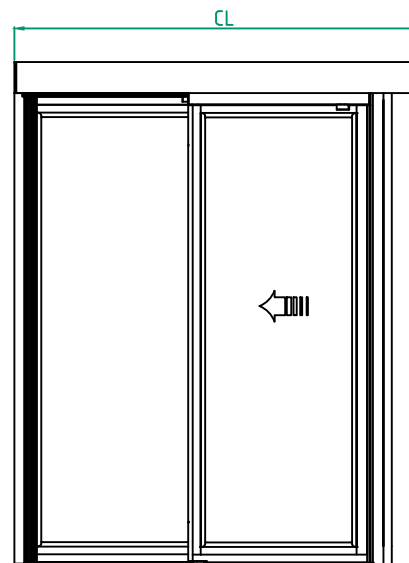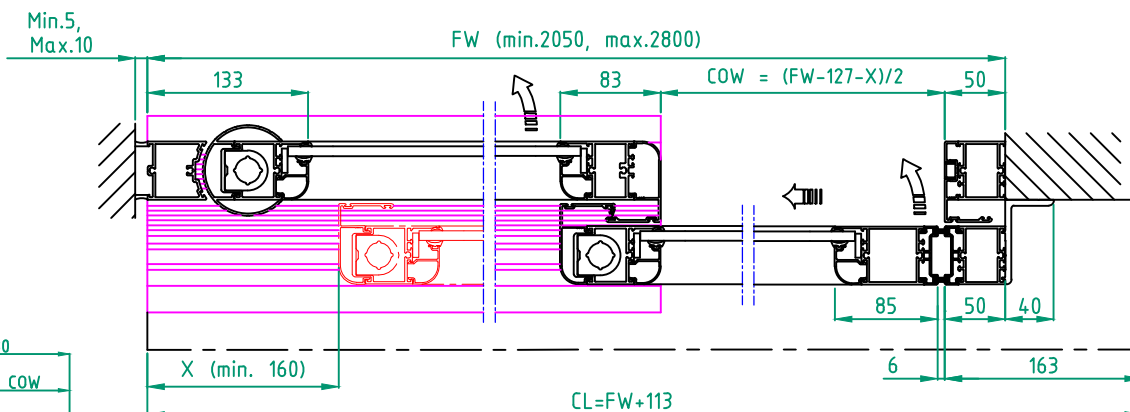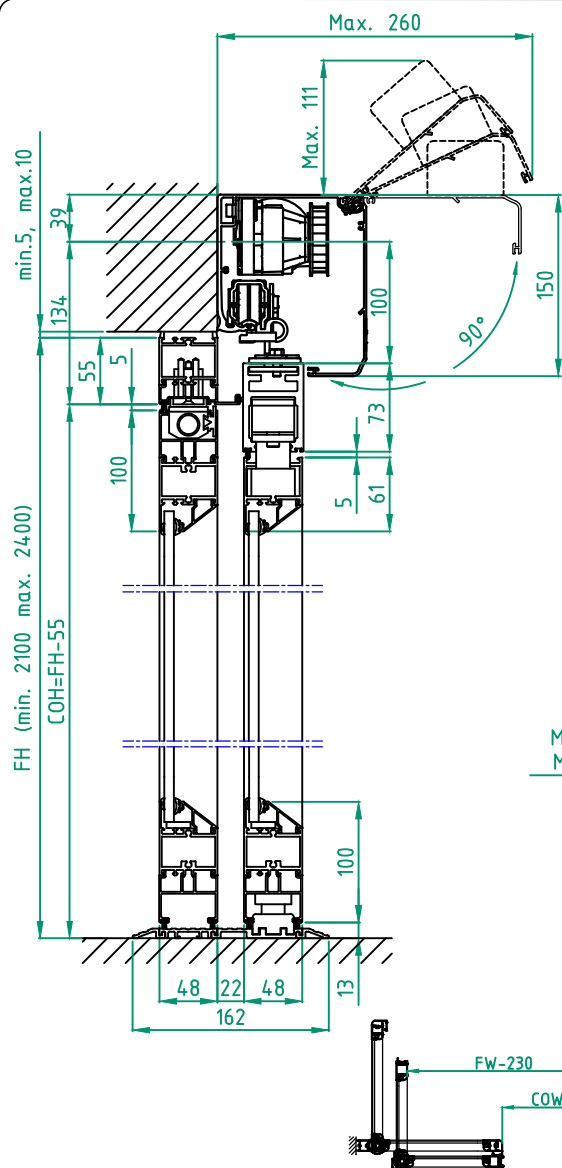

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 5,8 m²

If 40 mm glass FW x FH = max. 5,1 m²

Installation

☐ Floor heating
☐ Sensor
☐ Other


Notes:

Customer:	Ref:	Automatic door system ASSA ABLOY Frame break-out 2 Panel wall mounted opening left Art. No. 1009382-2PS-15 ASSA ABLOY SL500
Door id:	Date:	
Project No:	Sign:	

ASSA ABLOY

7.0

1009382-en

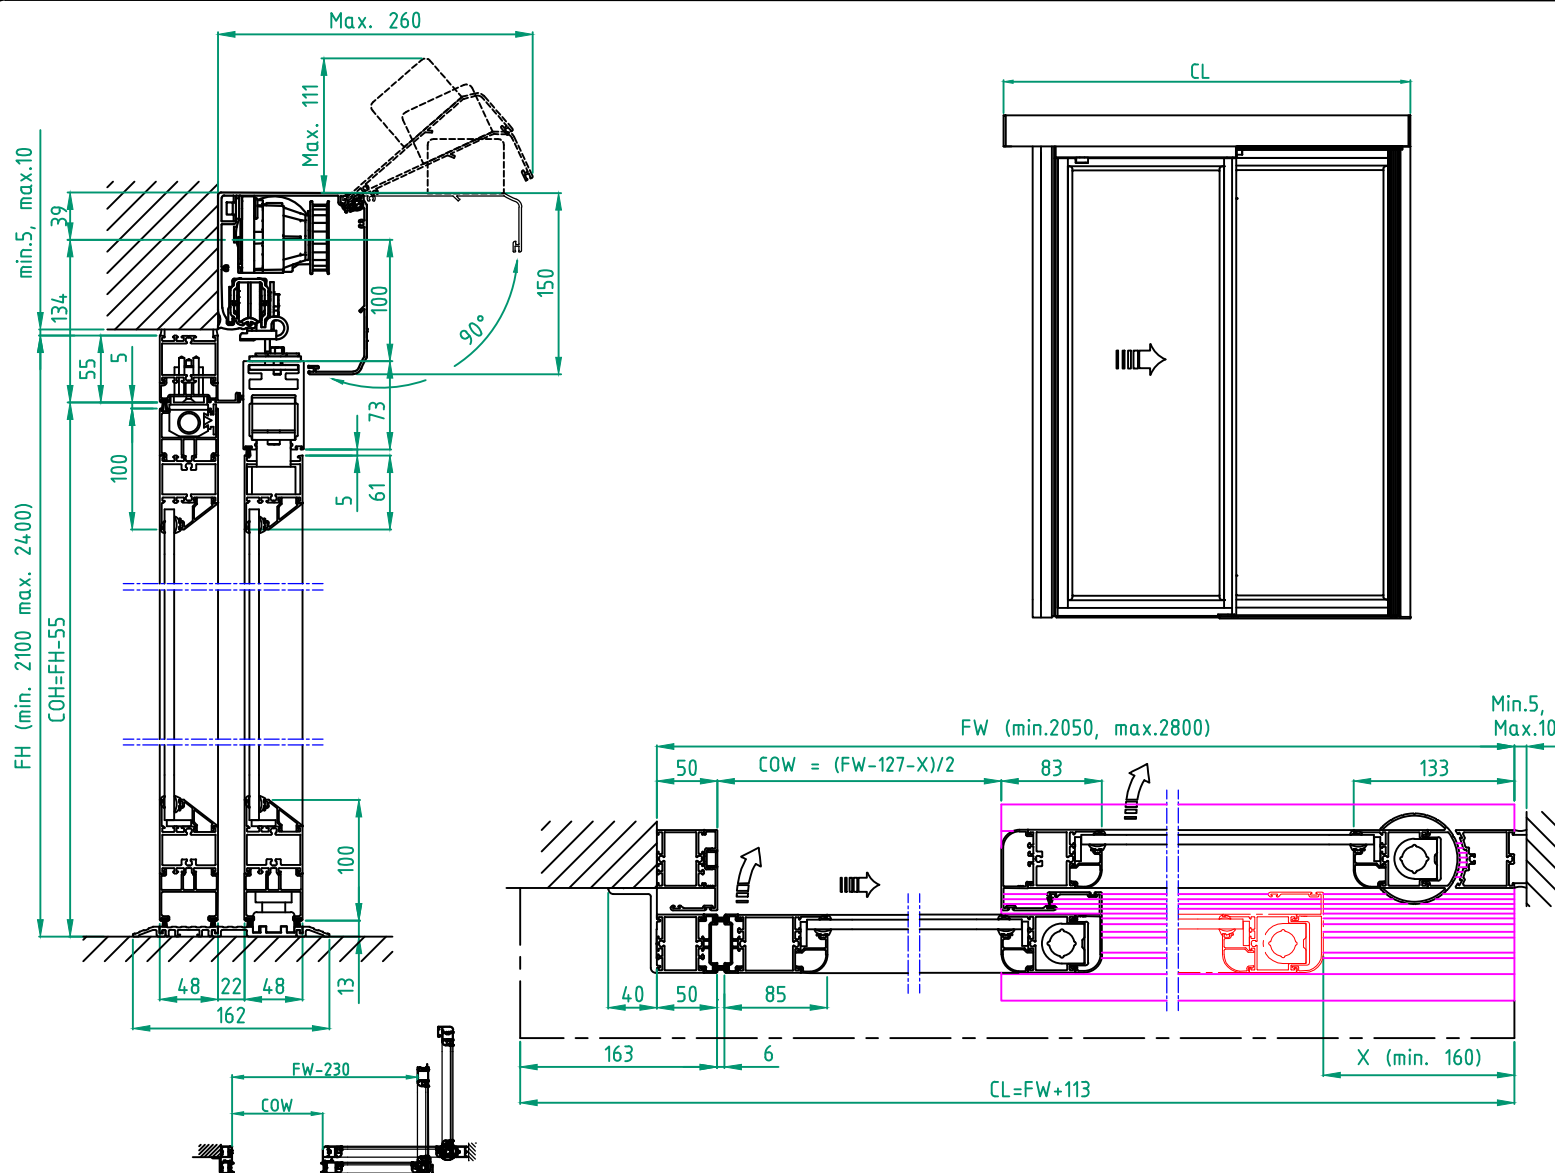

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 5,8 m²

If 40 mm glass FW x FH = max. 5,1 m²

Installation

☐ Floor heating
☐ Sensor
☐ Other

Notes:

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Automatic door system
ASSA ABLOY Frame break-out 2 Panel wall mounted opening right
Art. No. 1009382-2PS-15
ASSA ABLOY SL500

ASSA ABLOY

7.0

1009382-en

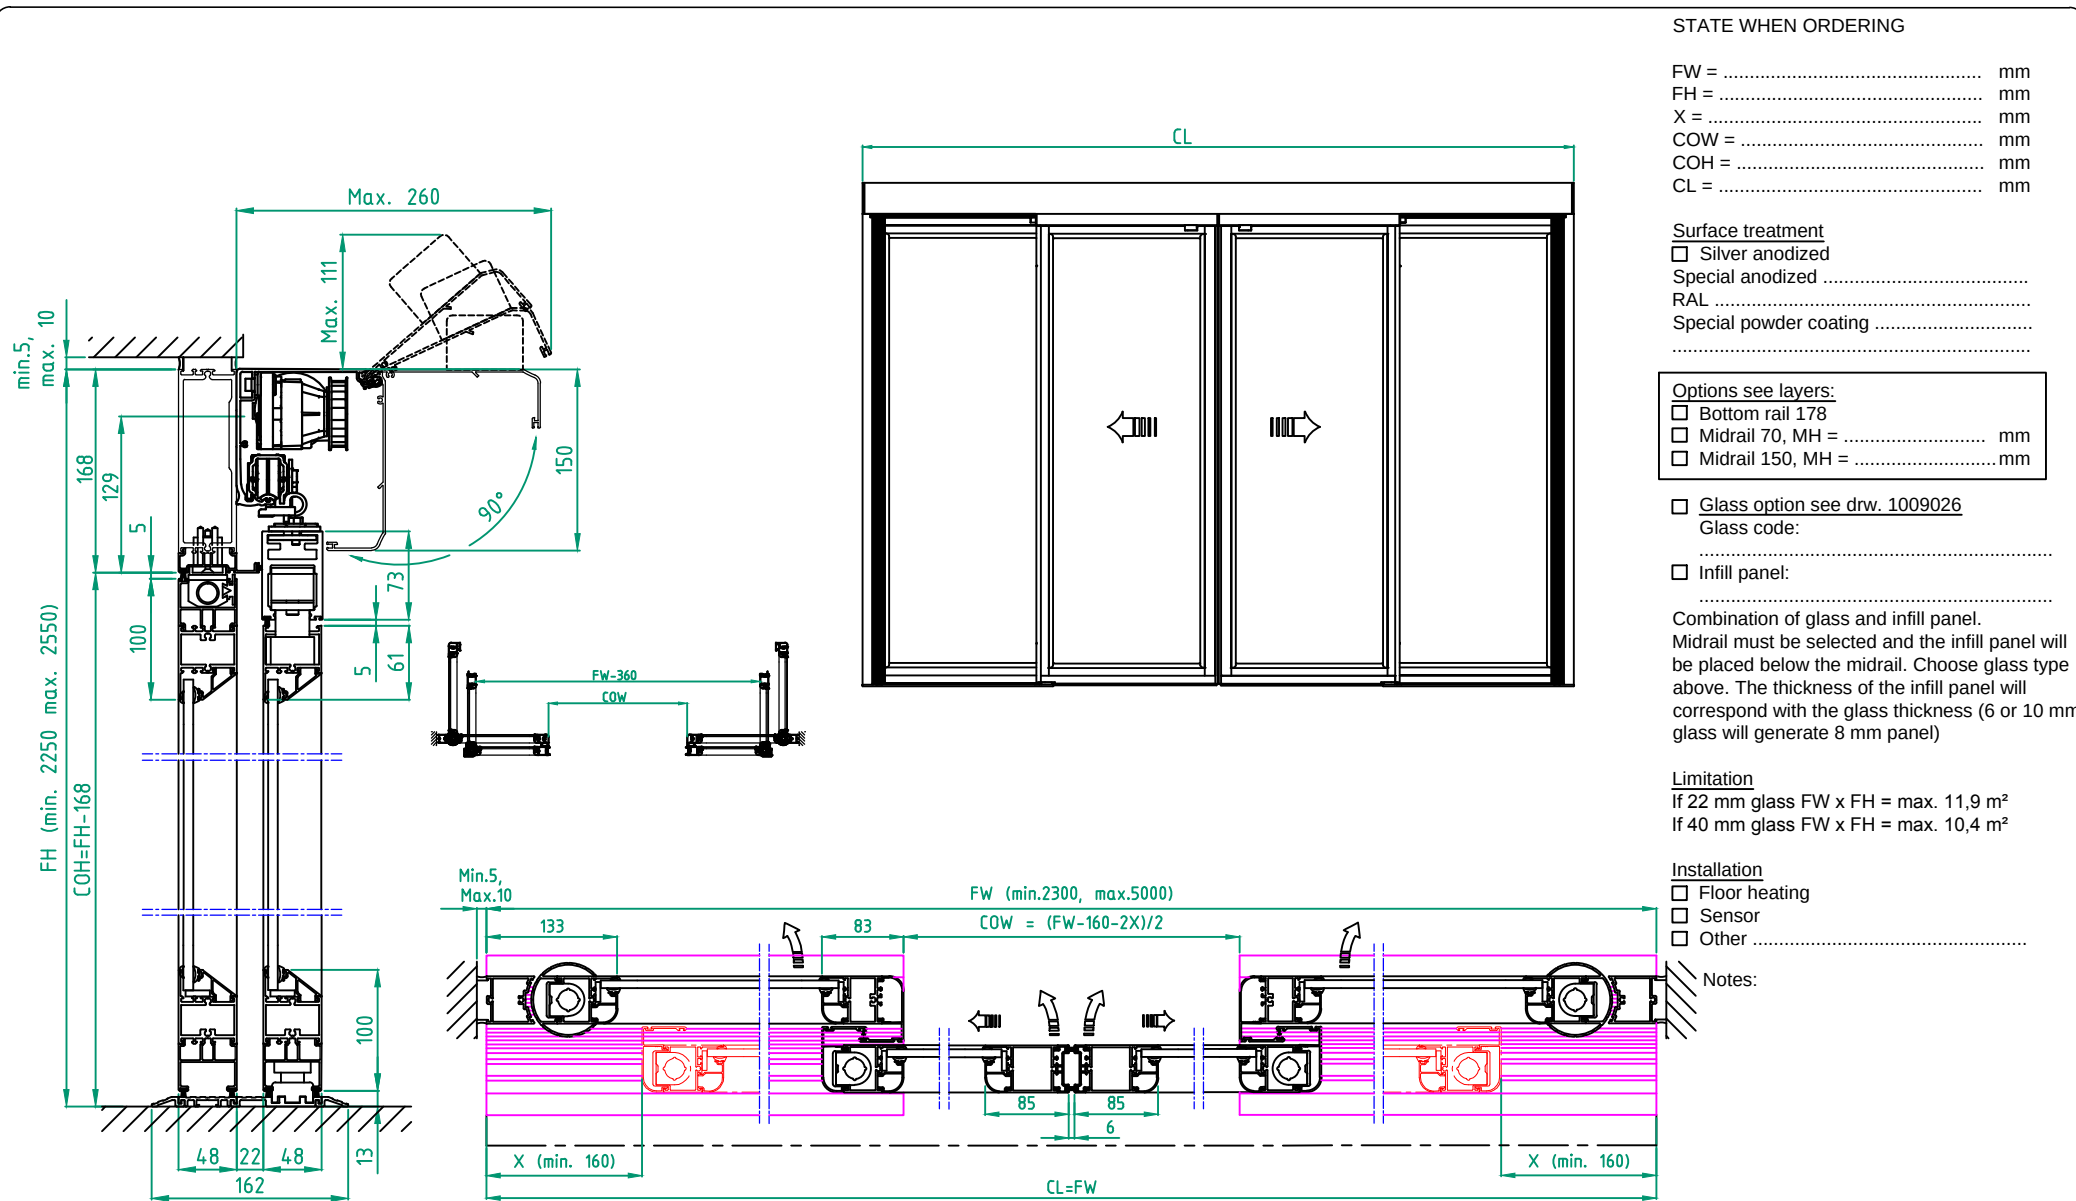

Customer: _____

Door id: _____

Project No: _____

Ref: _____


Date: _____

Sign: _____

Automatic door system
 ASSA ABLOY Frame break-out 4 Panel beam mounted
 Art. No. 1009382-4PB-15
 ASSA ABLOY SL500

ASSA ABLOY

7.0 1009382-en

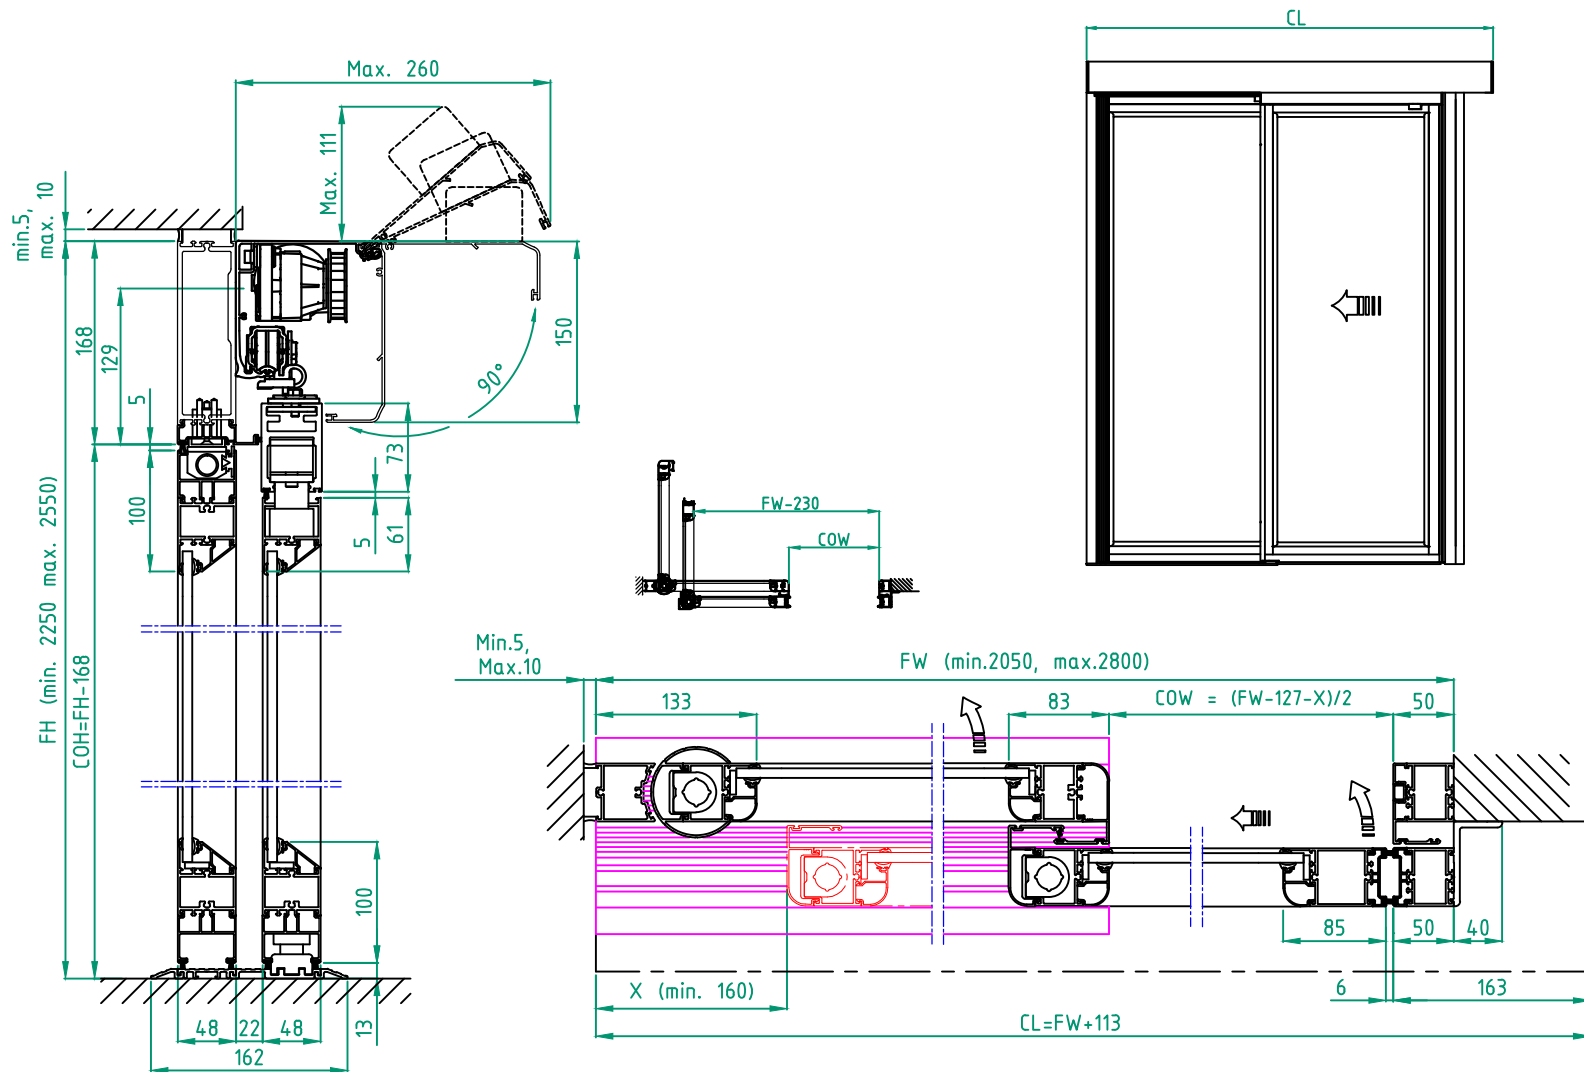

STATE WHEN ORDERING

FW = mm
 FH = mm
 X = mm
 COW = mm
 COH = mm
 CL = mm

Surface treatment

☐ Silver anodized
 Special anodized
 RAL
 Special powder coating

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.
 Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 6,1 m²
 If 40 mm glass FW x FH = max. 5,3 m²

Installation

☐ Floor heating
☐ Sensor
☐ Other

Notes:

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Automatic door system
 ASSA ABLOY Frame break-out 2 Panel beam mounted opening left
 Art. No. 1009382-2PS-15
 ASSA ABLOY SL500

ASSA ABLOY

7.0

1009382-en

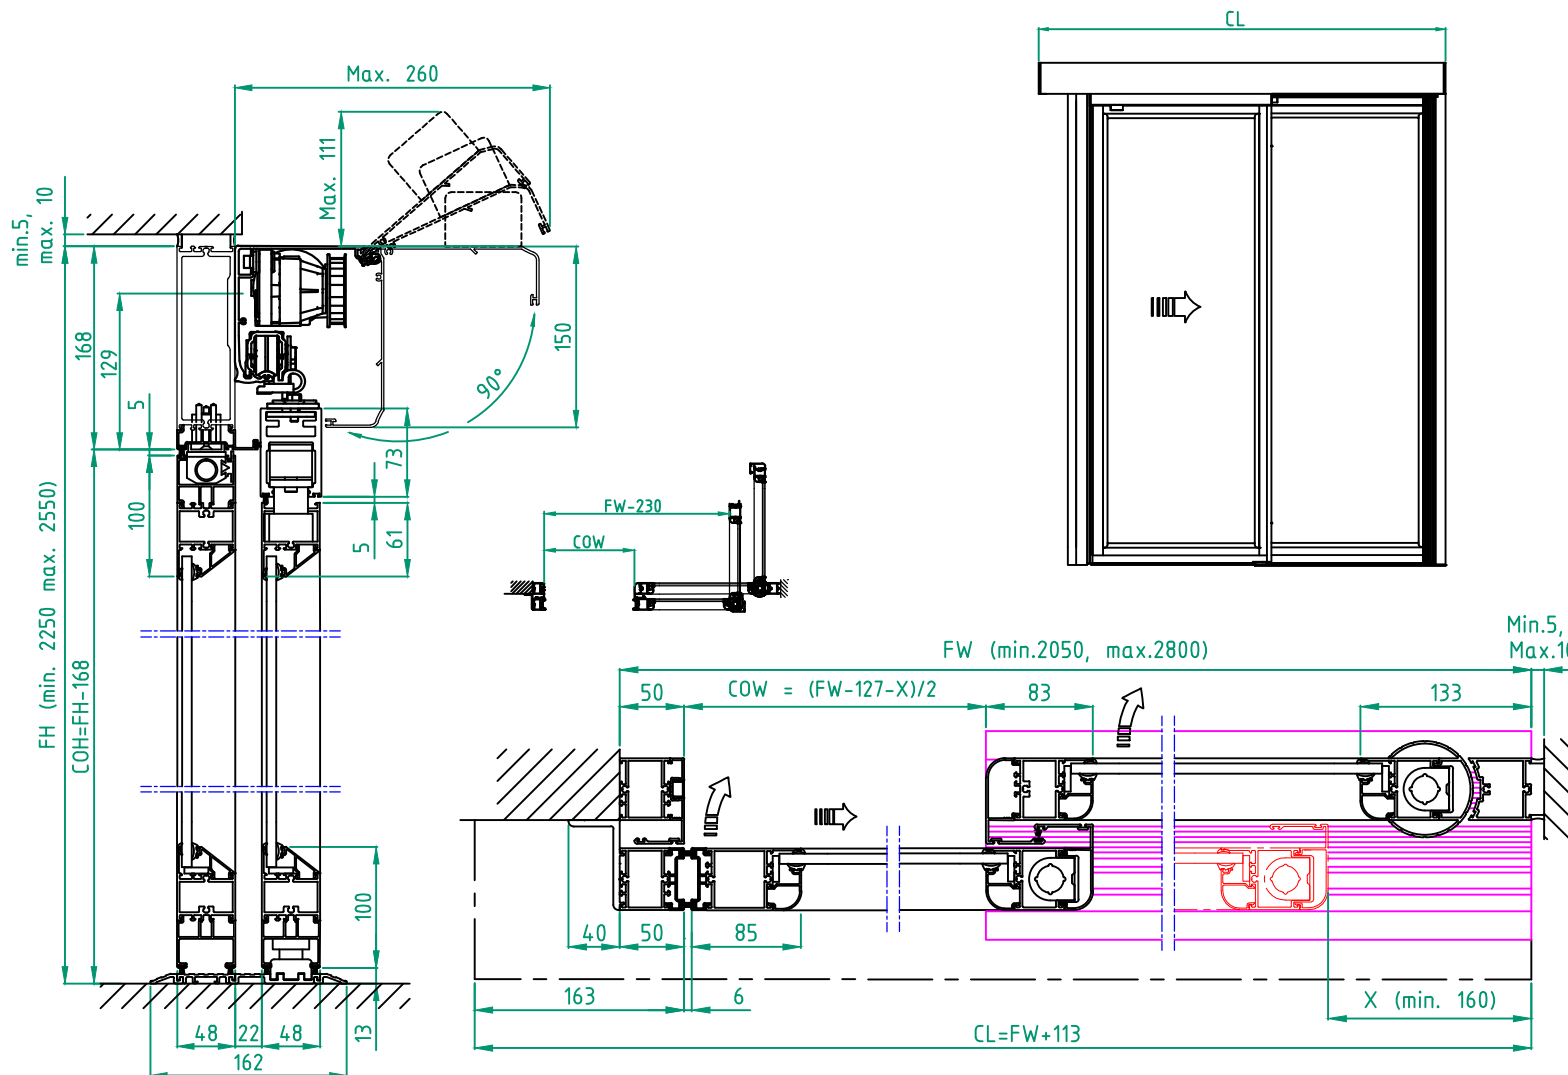

STATE WHEN ORDERING

FW = mm
FH = mm
X = mm
COW = mm
COH = mm
CL = mm

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Options see layers:

☐ Bottom rail 178
☐ Midrail 70, MH = mm
☐ Midrail 150, MH = mm

☐ Glass option see drw. 1009026

Glass code:

☐ Infill panel:

Combination of glass and infill panel.

Midrail must be selected and the infill panel will be placed below the midrail. Choose glass type above. The thickness of the infill panel will correspond with the glass thickness (6 or 10 mm glass will generate 8 mm panel)

Limitation

If 22 mm glass FW x FH = max. 6,1 m²

If 40 mm glass FW x FH = max. 5,3 m²

Installation

☐ Floor heating
☐ Sensor
☐ Other

Notes:

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Automatic door system
ASSA ABLOY Frame break-out 2 Panel beam mounted opening right
Art. No. 1009382-2PS-15
ASSA ABLOY SL500

ASSA ABLOY

7.0

1009382-en