
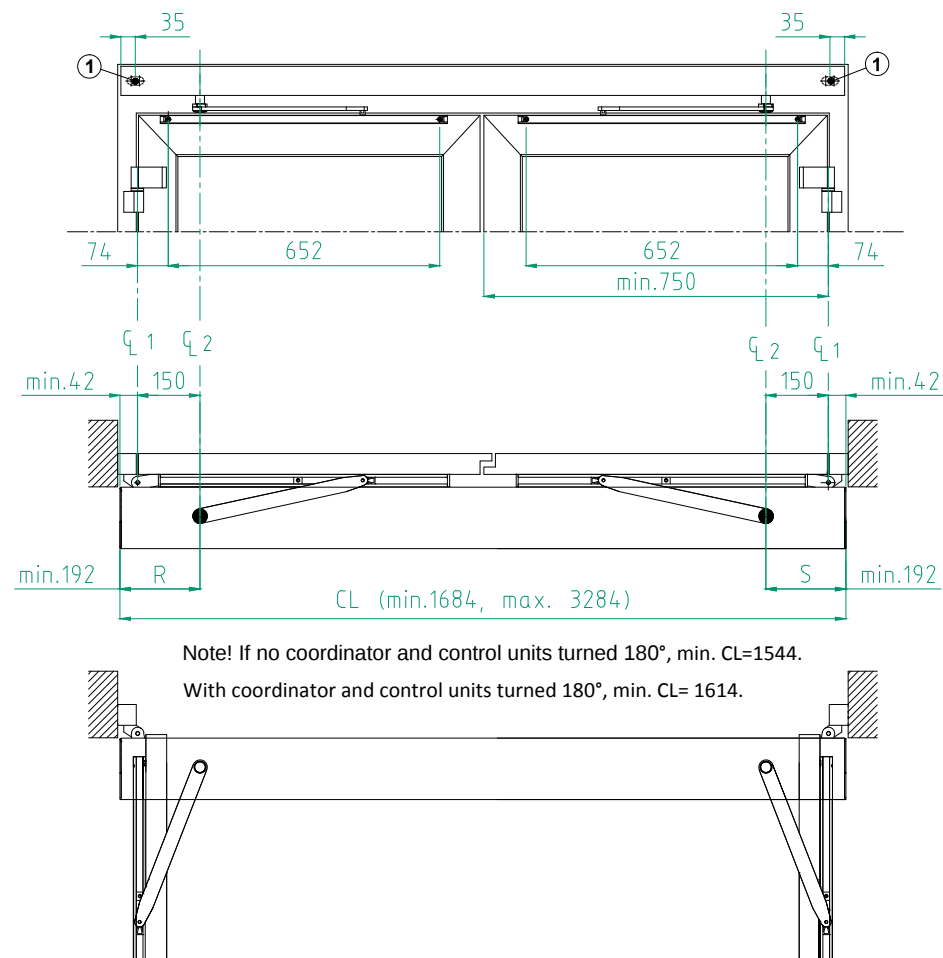


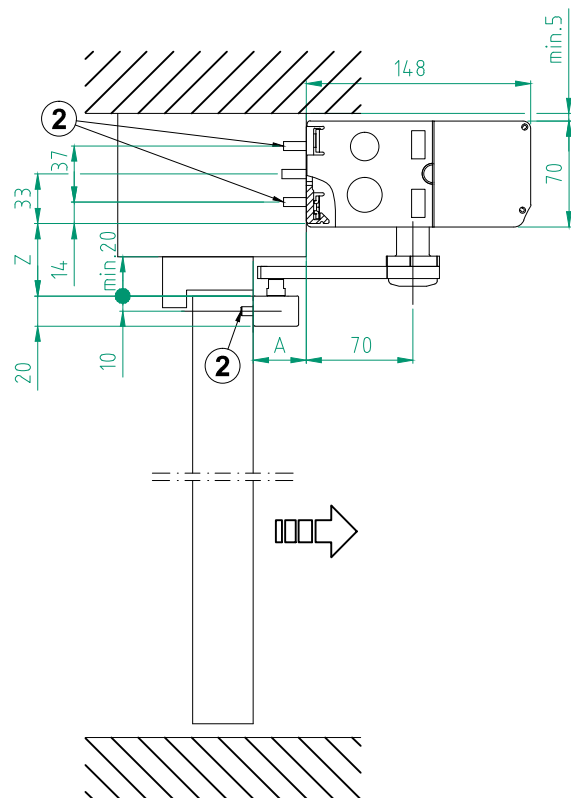

STATE WHEN ORDERING

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

Cover end plates

☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

Options see layers:

☐ Cover Modular, CL = mm
☐ Cover Full length, CL = mm
 R = mm
 S = mm

If R and S are set to "0", no cutouts will be made.

ℳ 1 = Hinges

② = Operator drive shaft

A = Reveal -20mm to 130mm

1 = Cable inlet

2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Swing door operator

ASSA ABLOY SW300-2(Art. No. 1009172)



ASSA ABLOY SW150-2(Art. No. 1009173)

PULL

ASSA ABLOY

17.0

1009172-en

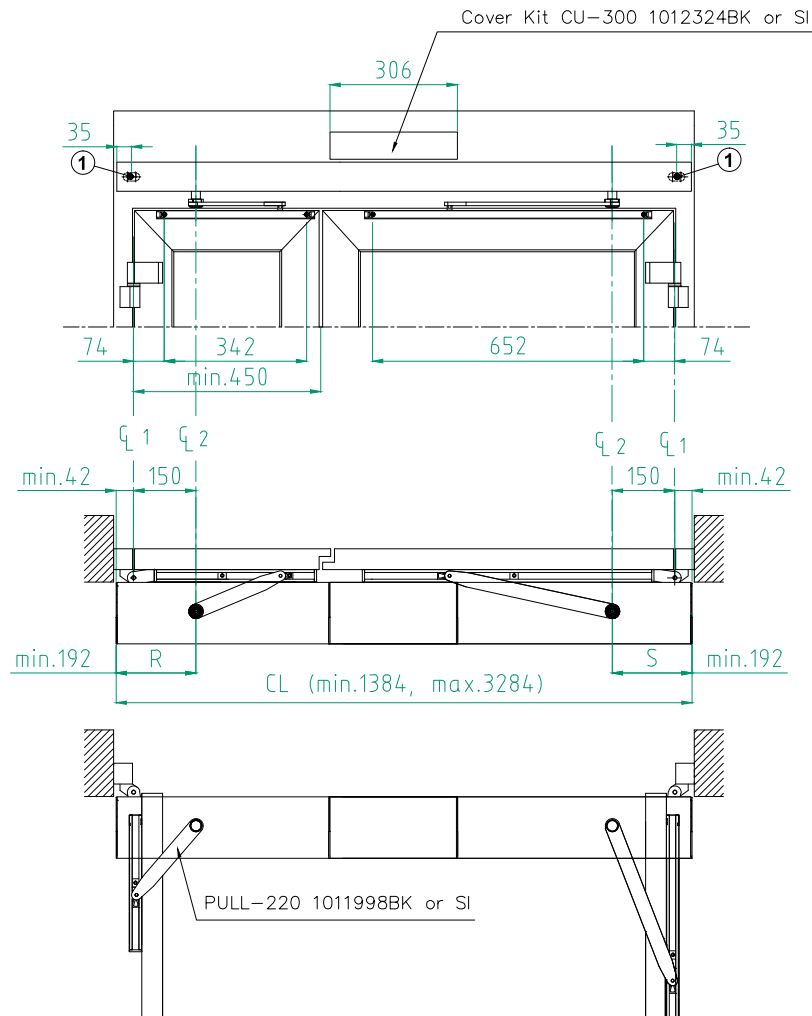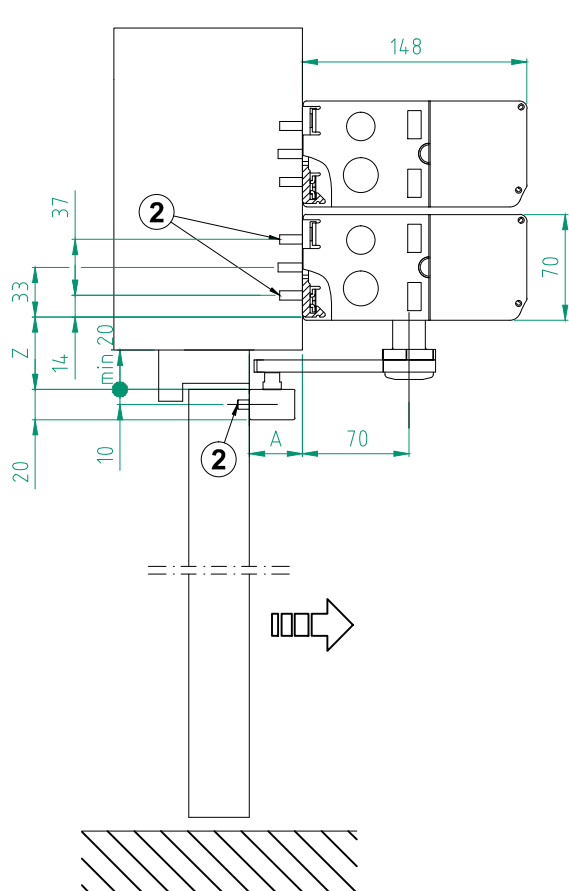

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

CL = mm
R = mm
S = mm
If R and S are set to "0", no cutouts will be made.

- CL 1 = Hinges
CL 2 = Operator drive shaft
A = Reveal -20mm to 65mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70

Customer:

Ref:

Door id:

Date:



Project No:

Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PULL Narrow Door

ASSA ABLOY

17.0 1009172-en

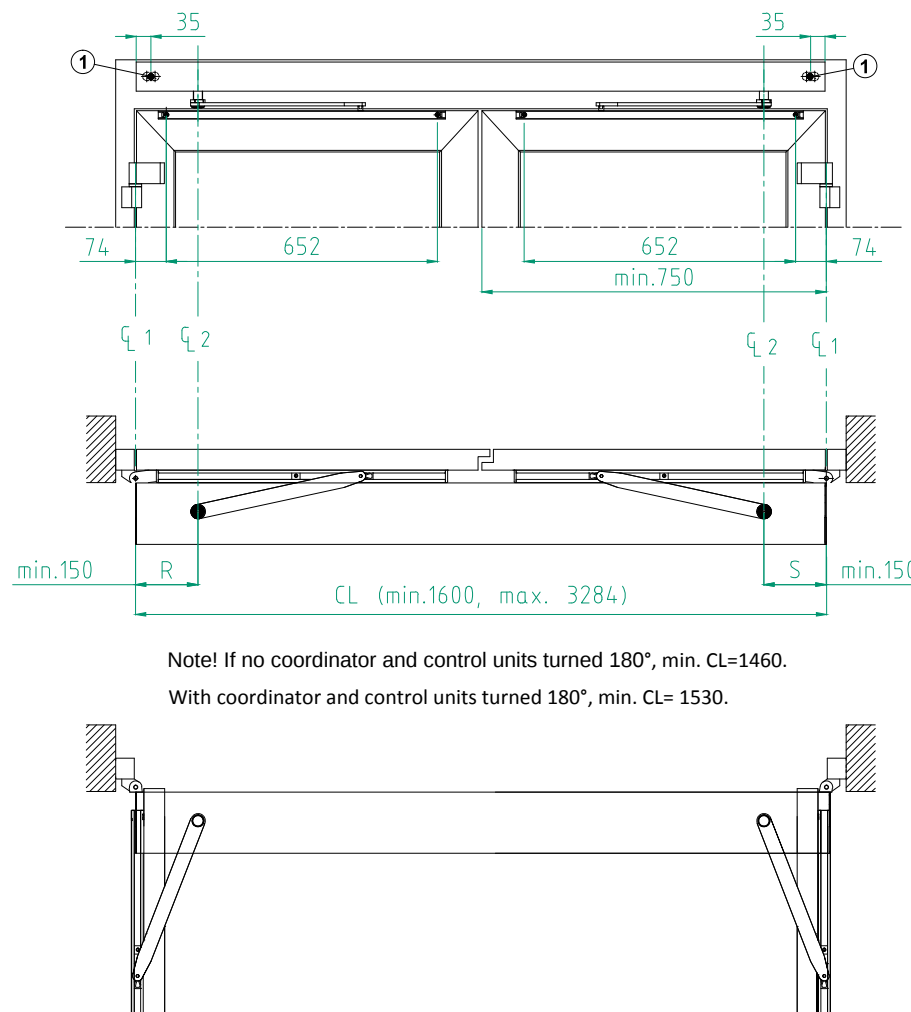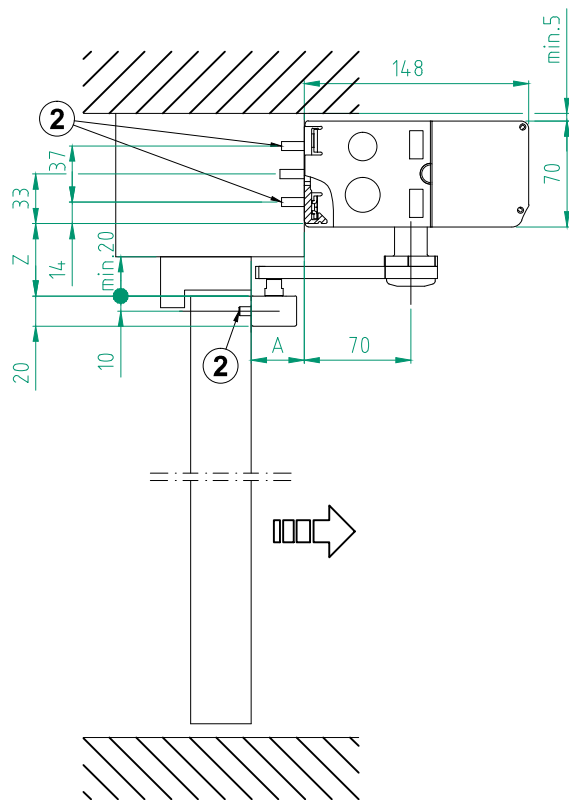

Note! If no coordinator and control units turned 180°, min. CL=1460.
With coordinator and control units turned 180°, min. CL= 1530.

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

CL = mm
R = mm
S = mm
If R and S are set to "0", no cutouts will be made.
Note! No space for battery if R/S<192

- CL 1 = Hinges
CL 2 = Operator drive shaft
A = Reveal -20mm to 130mm
1 = Cable inlet
2 = Reinforcements required

Z	Shaft extension
48	0
68	20
98	50
118	70

Customer:

Ref:

Door id:

Date:

Project No:


Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PULL with shorty cover

ASSA ABLOY

17.0

1009172-en

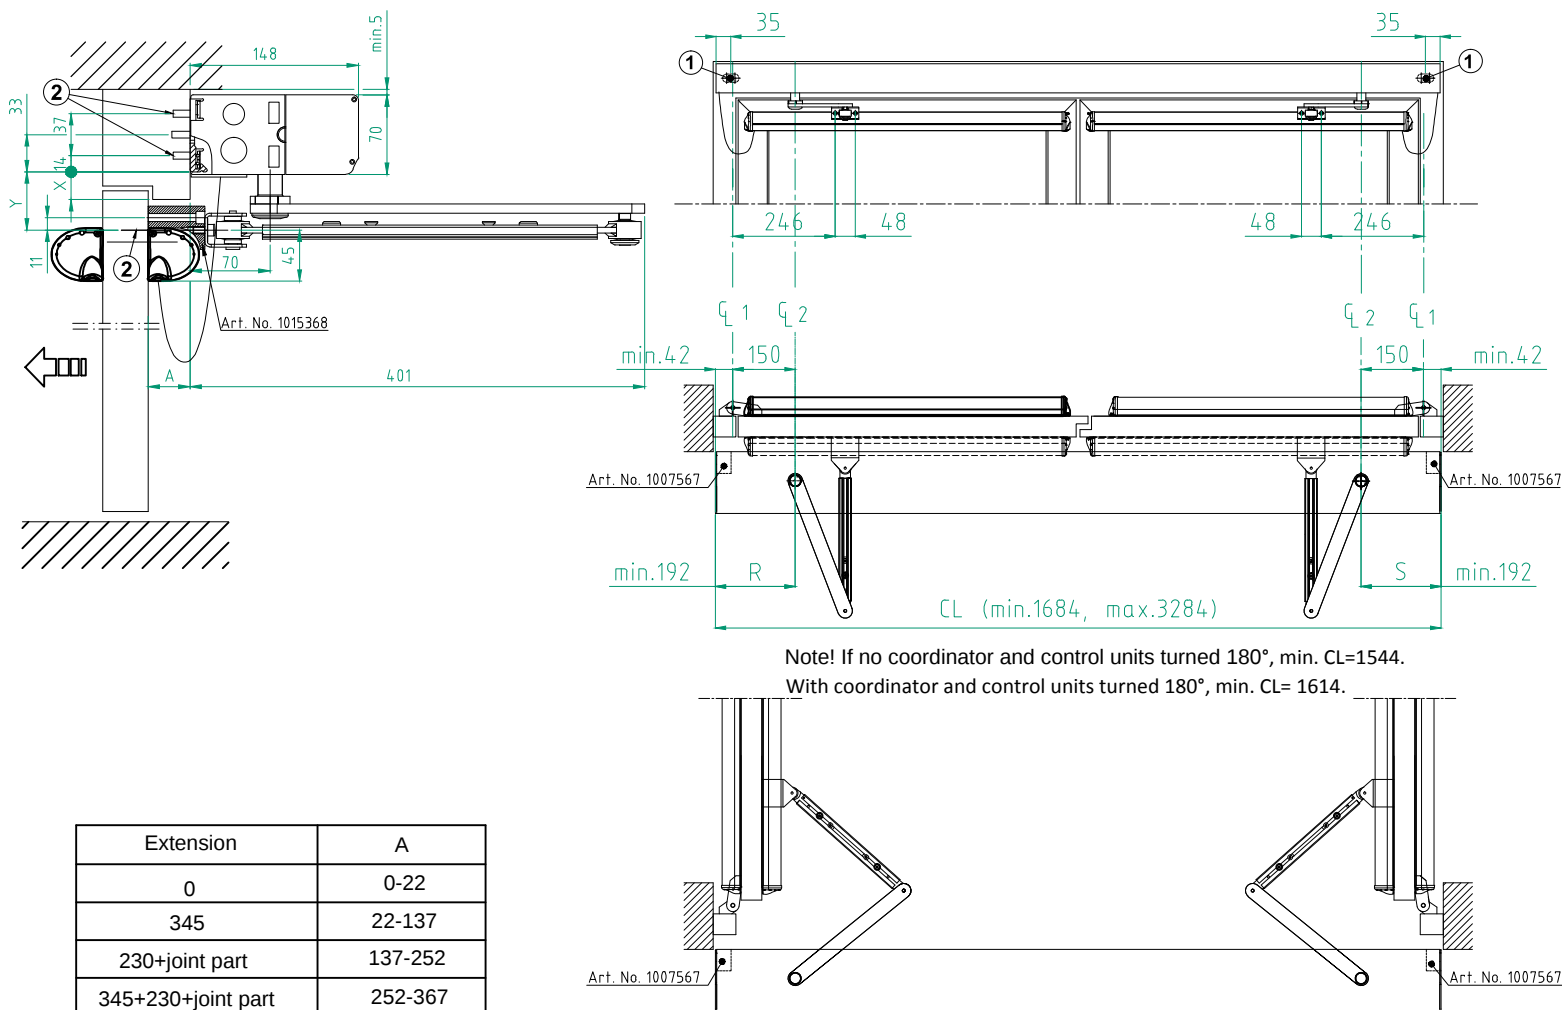

STATE WHEN ORDERING

Surface treatment

☐ Silver anodized
Special anodized
RAL
Special powder coating

Cover end plates

- ☐ BK
- ☐ SI
- ☐ Basic
- ☐ Fire door
- ☐ Connection box
- ☐ Connection plug

Options see layers:

☐ Cover Modular, CL = mm
☐ Cover Full length, CL = mm
 R = mm
 S = mm

If R and S are set to "0", no cutouts will be made.

⌘ 1 = Hinges

② = Operator drive shaft

1 = Cable inlet
2 = Reinforcements required

Extension	A
0	0-22
345	22-137
230+joint part	137-252
345+230+joint part	252-367

X	Y	Shaft extension
2-25	51	0
25-45	71	20
45-75	101	50
75-95	121	70

Customer:

Door id:

Project No:

Ref:

Date:



Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PUSH

ASSA ABLOY

17.0

1009172-en

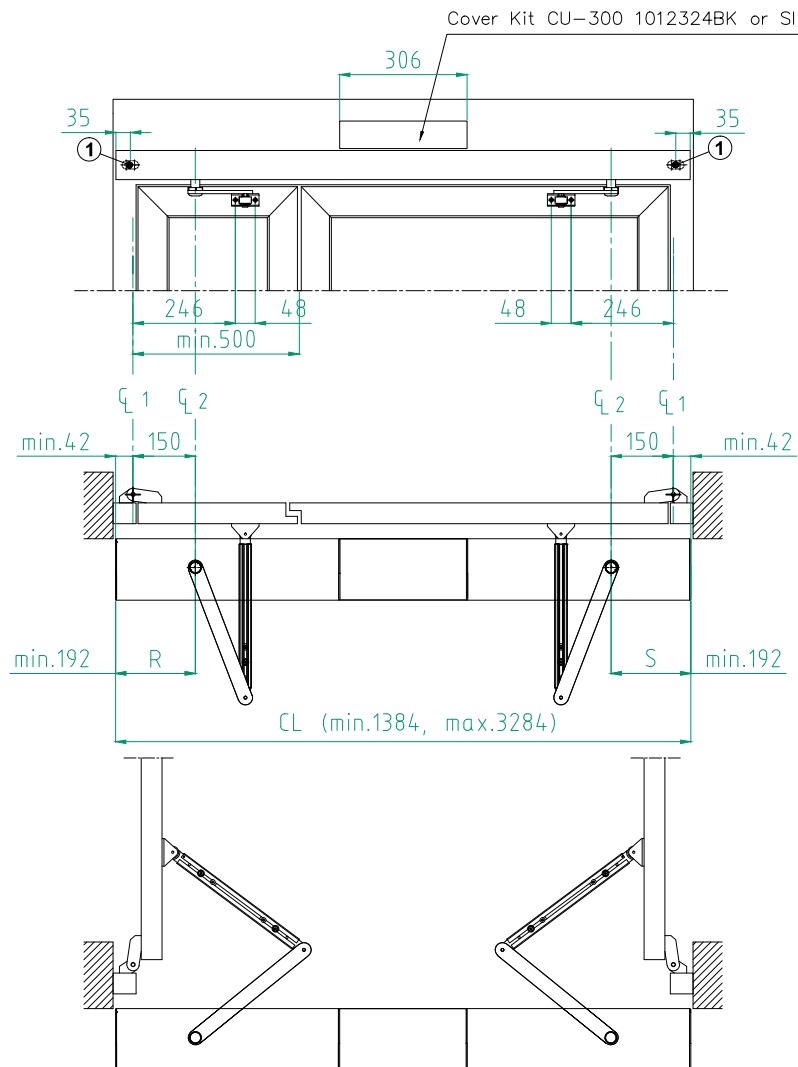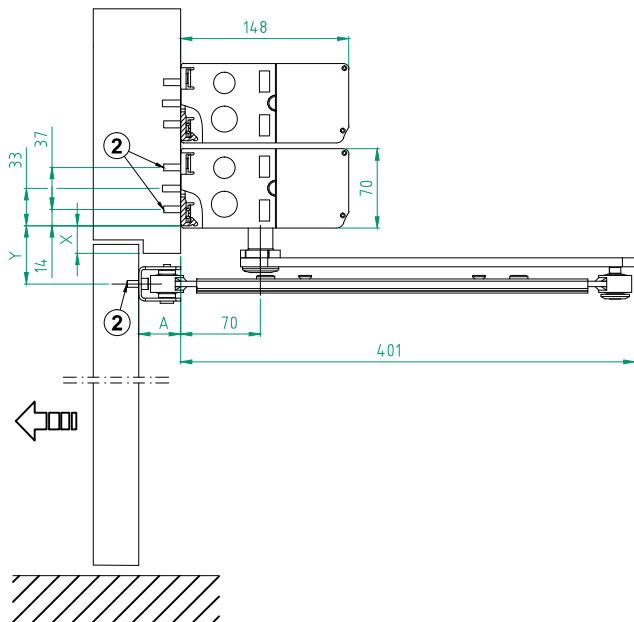

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

CL = mm
R = mm
S = mm
If R and S are set to "0", no cutouts will be made.

- CL 1 = Hinges
CL 2 = Operator drive shaft
A = Reveal 0mm to 22mm, optional 300mm
1 = Cable inlet
2 = Reinforcements required

X	Y	Shaft extension
2-25	51	0
25-45	71	20
45-75	101	50
75-95	121	70

Customer:

Ref:

Door id:

Date:



Project No:

Sign:


Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PUSH Narrow Door

ASSA ABLOY

17.0 1009172-en

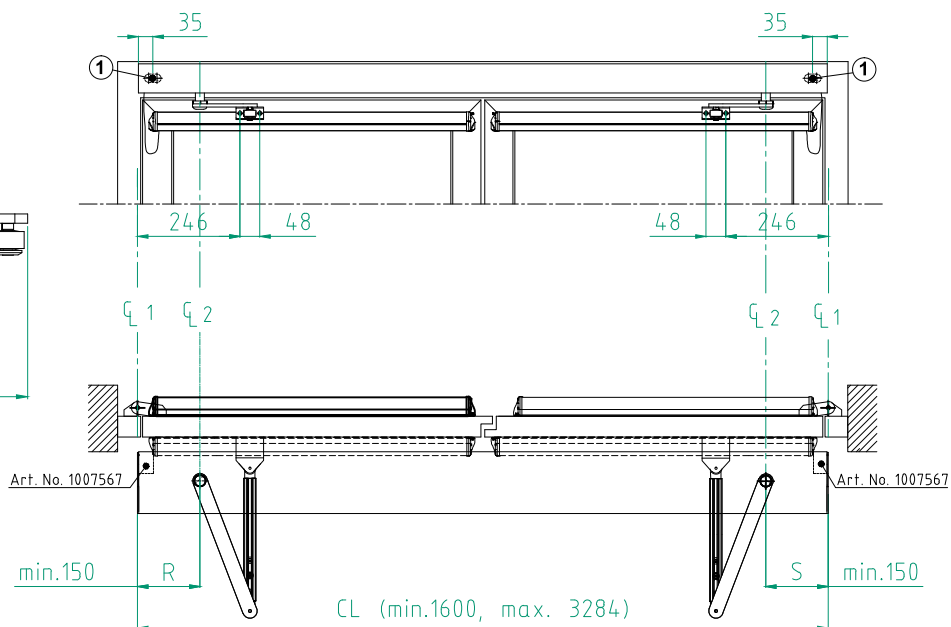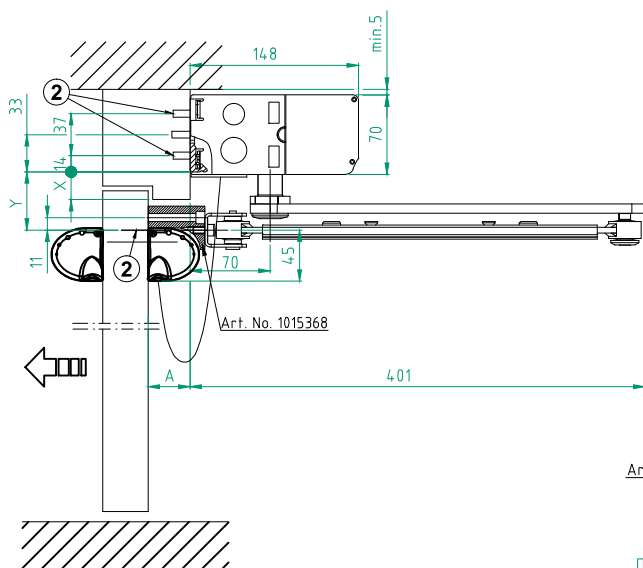

Note! If no coordinator and control units turned 180°, min. CL=1460.
With coordinator and control units turned 180°, min. CL= 1530.

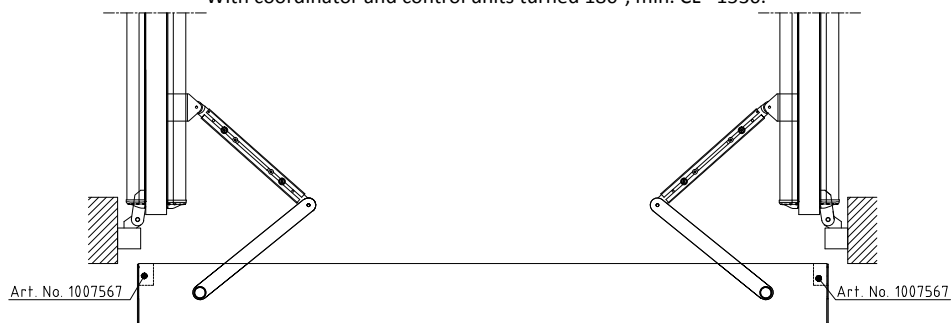

Extension	A
0	0-22
345	22-137
230+joint part	137-252
345+230+joint part	252-367

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

CL = mm

R = mm

S = mm

If R and S are set to "0", no cutouts will be made.

Note! No space for battery if R/S<192

1 = Hinges

2 = Operator drive shaft

1 = Cable inlet

2 = Reinforcements required

X	Y	Shaft extension
2-25	51	0
25-45	71	20
45-75	101	50
75-95	121	70

Customer:

Ref:

Door id:

Date:

Project No:




Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009172)
PUSH with shorty cover

ASSA ABLOY

17.0

1009172-en

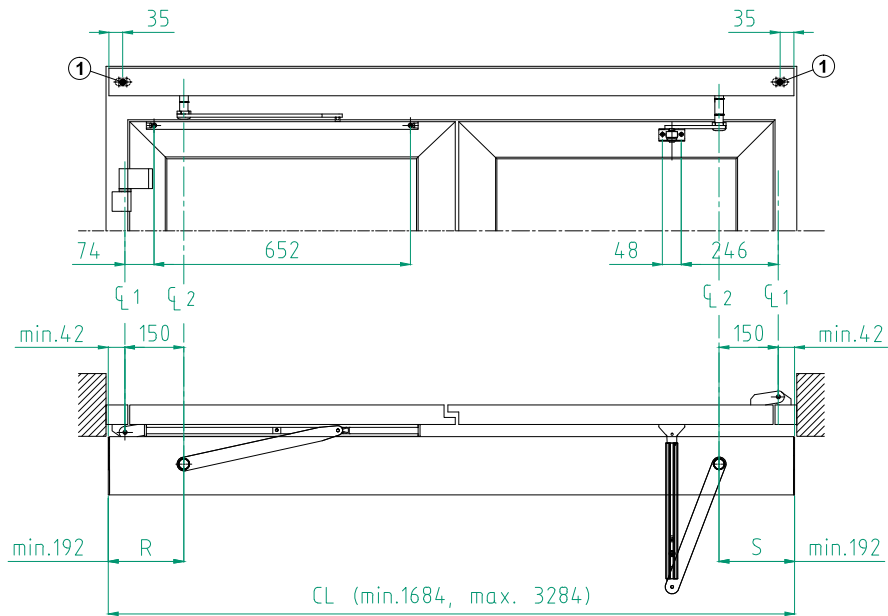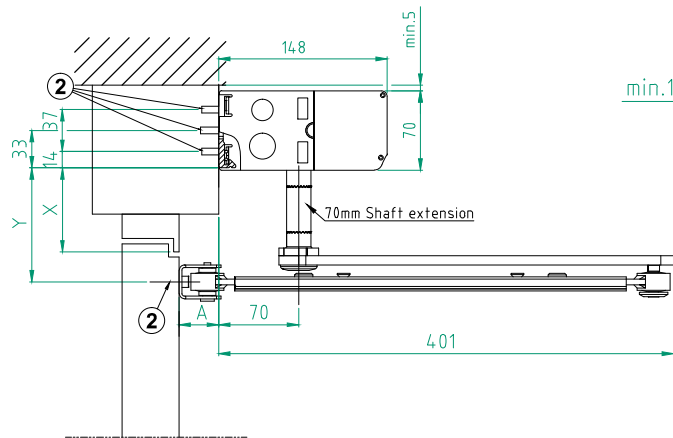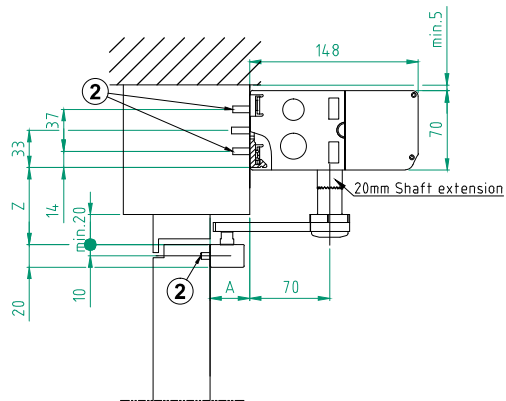

Note! If control units are turned 180°, min. CL=1544

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating

Cover end plates

- ☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

Options see layers:

- ☐ Cover Modular, CL = mm
☐ Cover Full length, CL = mm
R = mm
S = mm

If R and S are set to "0", no cutouts will be made.

CL 1 = Hinges

CL 2 = Operator drive shaft

A = Reveal 0mm to 22mm, optional 130mm

1 = Cable inlet

2 = Reinforcements required

Z	Pull Shaft extension
48	0
68	20

X	Y	Push Shaft extension
45-75	101	50
75-95	121	70

Customer:

Ref:

Door id:

Date:

Project No:



Sign:

Swing door operator
ASSA ABLOY SW300-2(Art. No. 1009172)
ASSA ABLOY SW150-2(Art. No. 1009173)
PULL+PUSH

ASSA ABLOY

17.0

1009172-en

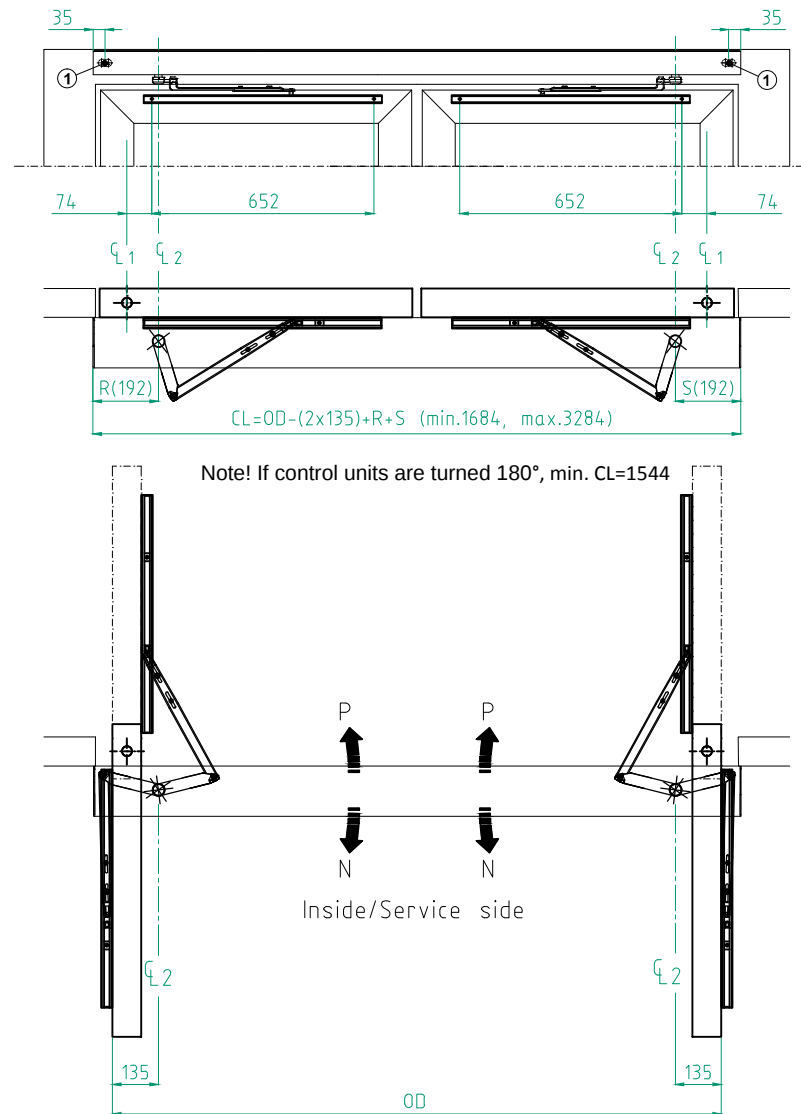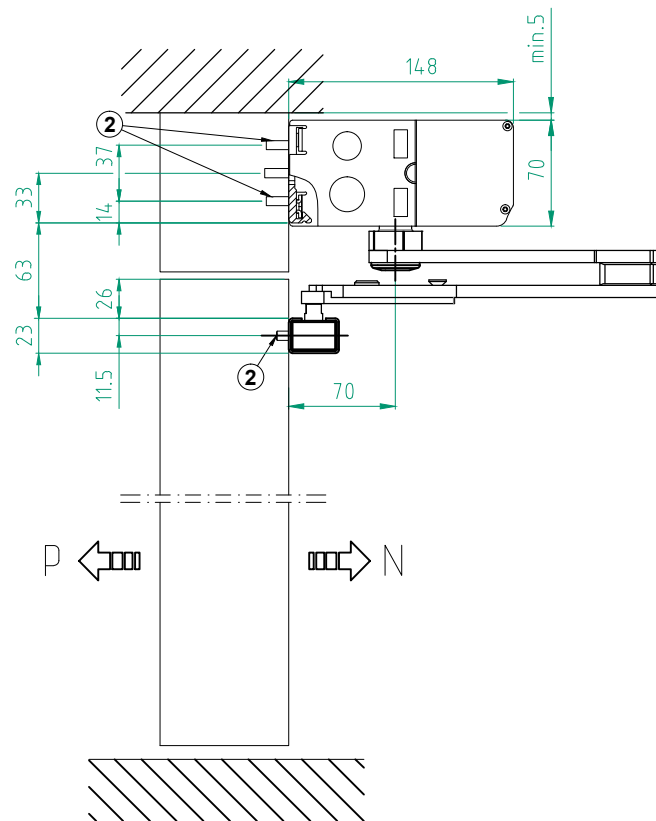

STATE WHEN ORDERING

Surface treatment

- ☐ Silver anodized
Special anodized
RAL
Special powder coating
.....

Cover end plates

- ☐ BK
☐ SI

☐ Basic
☐ Fire door
☐ Connection box
☐ Connection plug

OD = mm
CL = mm
If R and S are set to "0", no cutouts will be made.

- ⌀1 Pivot point
⌀2 Operator drive shaft
1 Cable inlet
2 Reinforcements required
OD Outside doors
N Normal opening direction
P Escape opening direction

Customer:

Ref:

Door id:

Date:

Project No:

Sign:

Swing door operator
ASSA ABLOY SW300 DA-2
Arm system Double Acting

ASSA ABLOY

17.0

1009172-en