


Prinzipzeichnung Schnelllauf-Rollltor RR 300

General Drawing High Speed Roller Door RR 300

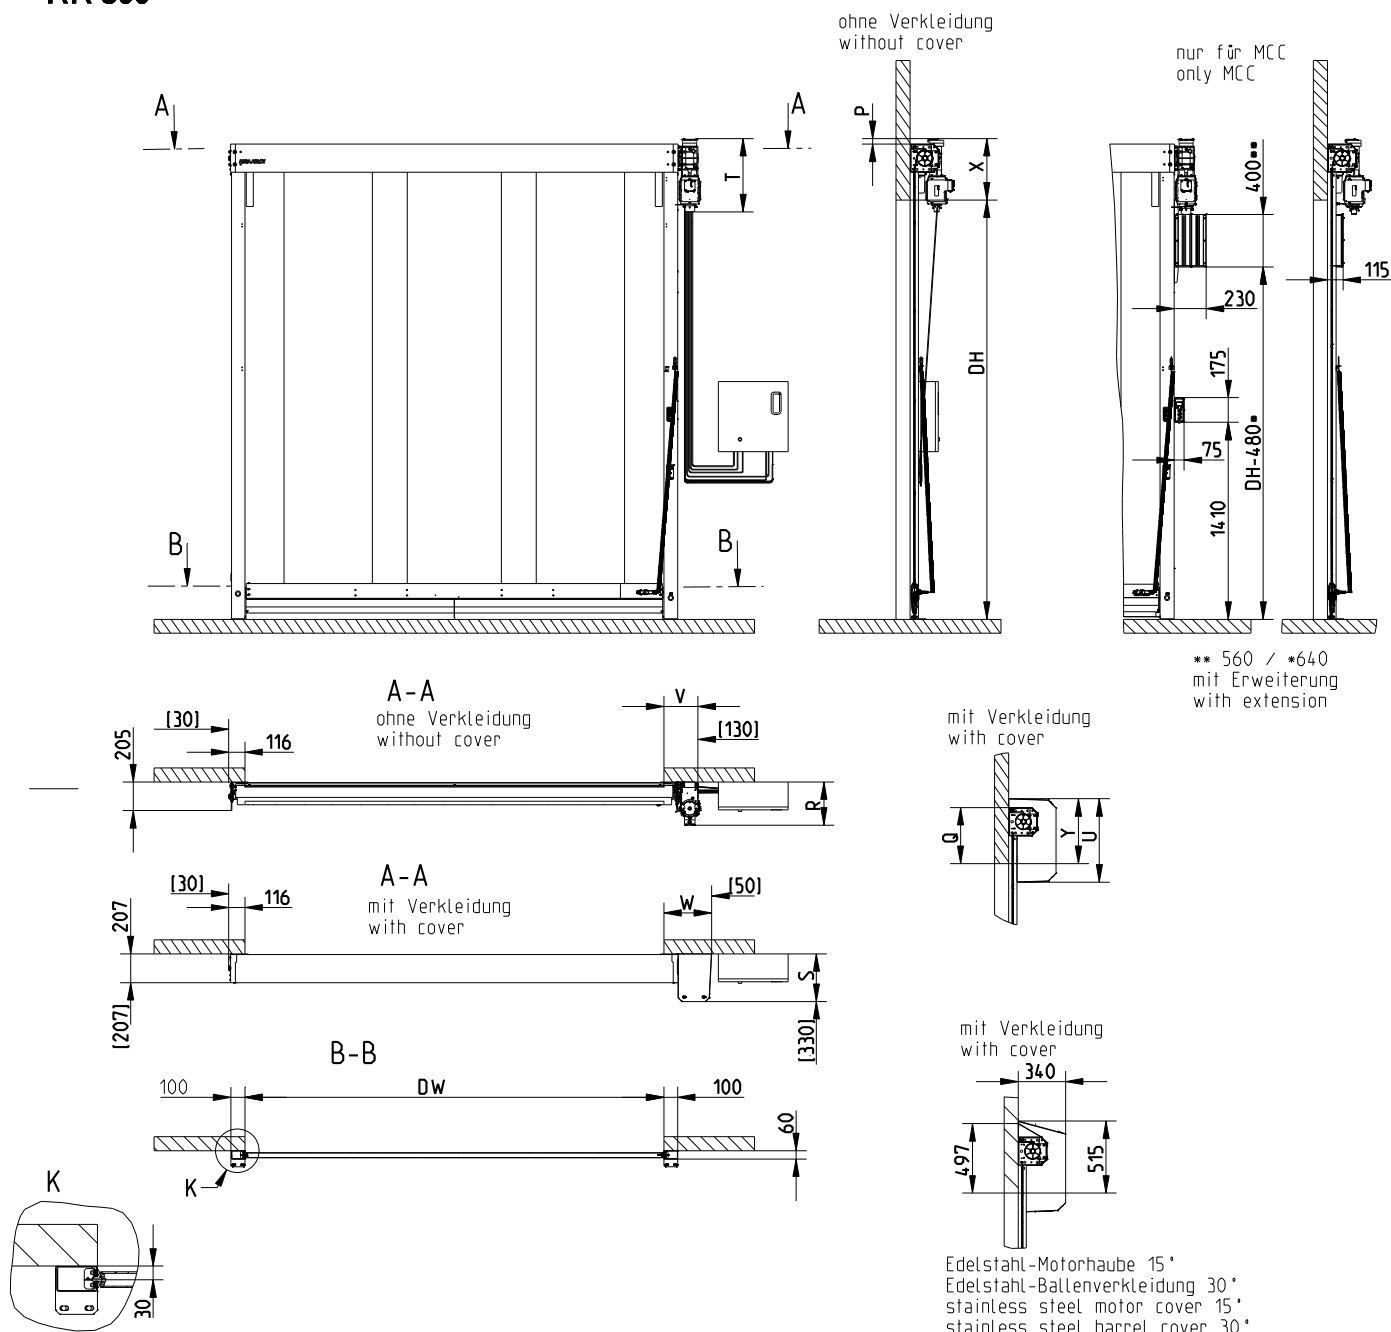

	Without covers			With covers		
	Standard			Standard		
	MCC	ACS 50. without control.		Plastic	Steel	Stainless steel
X	440	440	Y	470	465	515
V	265	265	W	346	342	342
R	315	315	S	340	340	340
T	550	520	U	610	600	650
P	42	42	Q	400	400	400

Steuerung / Control Unit		ACS 50	MCC
Abmessungen BxHxT Dimensions WxHxD	mm	300x400x210	220x380x100

Available sizes		DW (B)	DH (H)
Standard	min: ■	1000	1000
	max: ■■	4000	4200
■ Crash	min:	1300	1000
■■ ACS 50.Top 1.3.	max:	3500	3500

[] = Montagefreiraum
Space needed for installation

8300R0009/o
Stand: 2019-06-06