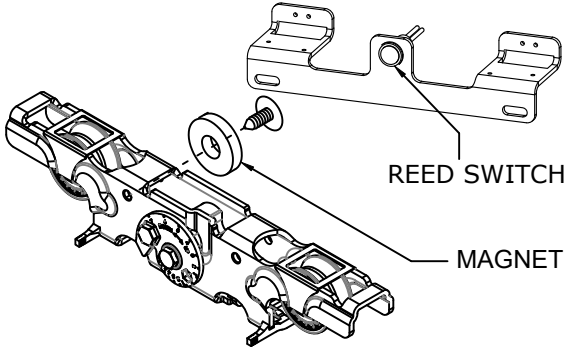
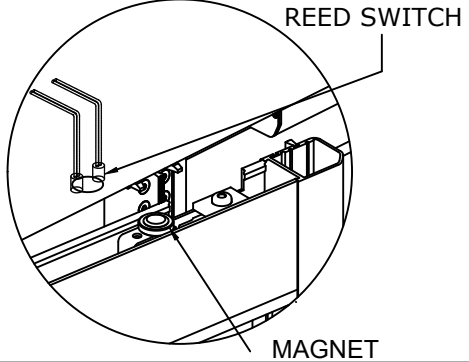


Description	Active Leaf Components	
Remarks	<ul style="list-style-type: none"> Includes Magnet and Reed Switch Magnet on Wheel Assembly, Reed Switch in Header 	
	Sidelite Components <ul style="list-style-type: none"> Magnet in Top of Sidelite, Reed Switch in Header. 	

Reed Switch Rating

0.4 Amp Max, 200 VDC

Connections



Connect to the terminals shown for building/security systems.

Reed switch(es) provided are normally open.

When doors are latched the reed switch is closed, when doors are open or broken out the reed switch is open.

To access terminal block, open access cover and follow arrow with note as shown.

Caution: NOT used for air curtains.

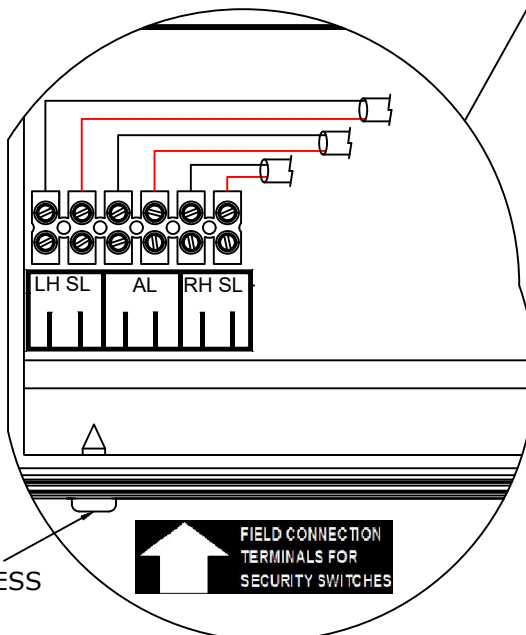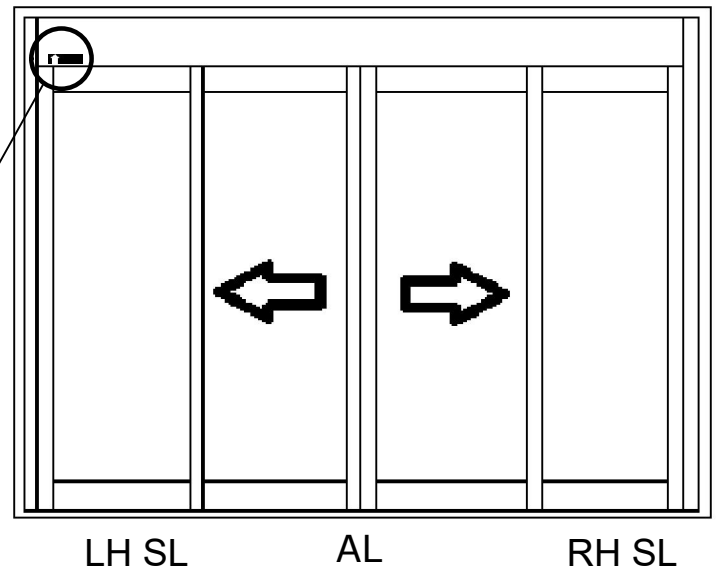

COVER ACCESS
SCREW

FIELD CONNECTION
TERMINALS FOR
SECURITY SWITCHES

DWG NO. 1022552

DRN BY CAT DATE 07/07/2021 CHK BY SS DATE 07/07/2021 REV. 1.0 DATE 07/07/2021

ASSA ABLOY