
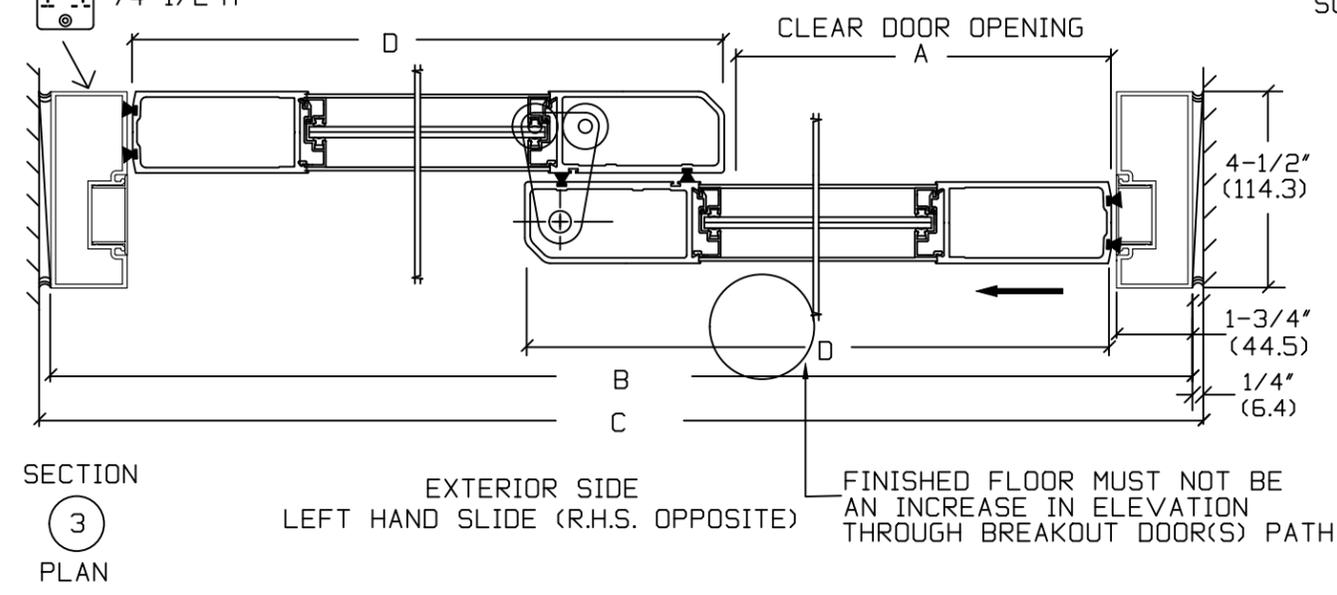


NON REMOVABLE
SECURITY TYPE
GLAZING BEAD
SYSTEM (TYP.)
1/4" STANDARD.
(6.4)

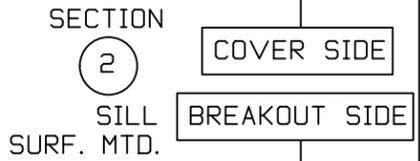

NOTE: THE STANDARD PACKAGE CONSISTS OF:
THE AUTOMATIC OPERATOR & WEATHERSTRIP. FRAMES. DOORS &
SIDELITES WITH VERTICAL WEATHERSTRIP, EMERGENCY BREAKAWAY
& 2-POINT LOCK. OPTIONAL 5 OR 3 POSITION SWITCHES (DIGITAL (3 OR 5)
OR KEY (5)), (OFF-EXIT ONLY-AUTO-REDUCED OPENING-HOLD OPEN OR, OFF.

AUTO, HOLD OPEN), MOTION/PRESENCE SENSORS, OPTIONAL 6" JAMBS.
STANDARD FINISH: CLEAR- AA-M12C22A41, CLASS 1, .018 MM.
DARK BRONZE- AA-M12C22A44, CLASS 1, .018 MM.
THE PACKAGE IS GLAZED WITH A 1" (25.4) INSULATED GLASS

ENHANCE YOUR BESAM SL500 PACKAGE WITH ECODOOR OPTIONS TO
IMPROVE AIR INFILTRATION PERFORMANCE. CHOOSE FROM: ECODOOR
SEALS, MAGNETIC CATCHES, HYDRAULIC CLOSERS, INSULATED GLASS.


NOTE DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC
REF. AS FOLLOWS 1" (25.4) ALL METRIC SIZES ARE MILLIMETERS.
* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT
SPECIFICATION, INSTALLATION INSTRUCTIONS, OR THE UL
LABEL ON THE EQUIPMENT.

REFER TO RELEVANT (LOCAL, STATE, NATIONAL OR AHJ) BUILDING
CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE
FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE BELOW.

SL500 OHC	DOOR OPENING A	OVERALL FRAME WIDTH B	MASONRY OPENING WIDTH C	ACTIVE & SIDELITE LEAF WIDTH D
OC7-7	32 1/2" (825.5)	84" (2133.6)	84 1/2" (2146.3)	42 3/8" (1076.3)
OC7-8	38 1/2" (977.9)	96" (2438.4)	96 1/2" (2451.1)	48 3/8" (1228.7)
OC7-8-6	41 1/2" (1054.1)	102" (2590.8)	102 1/2" (2603.5)	51 3/8" (1304.9)
KEY	(B/2)-9 1/2" (B/2)-(241.3)	(C-1/2") (C-12.7)	(B+1/2") (B+12.7)	(B/2)+3/8" (B/2)+(9.5)

STANDARD GLASS SIZES ARE AS FOLLOWS;

SL500 OHC		1/4"(6.4)	5/8"(15.9) AND 1"(25.4)
OC7-7	W	33 7/8"(860.4)	33 5/8"(854.1)
	H	71 11/16 (1820.9)	71 3/16" (1808.2)
OC7-8	W	39 7/8"(1012.8)	39 5/8"(1006.5)
	H	71 11/16 (1820.9)	71 3/16" (1808.2)
OC7-8-6	W	42 7/8"(1089)	42 5/8"(1082.6)
	H	71 11/16 (1820.9)	71 3/16" (1808.2)
KEY	WIDTH	(B/2)-8 1/8" (B/2)-(206.4)	(B/2)-8 3/8" (B/2)-(212.7)
	HEIGHT	(OFH)-18 1/16" (OFH)-(458.8)	(OFH)-18 9/16" (OFH)-(471.5)

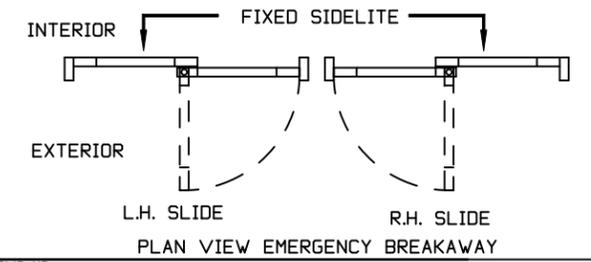

DWG NO. 1009864	DRN BY CLW	DATE 11/9/12	CHK BY SS	DATE 11/14/12	REV. 5.0	DATE 01/18/22
-----------------	------------	--------------	-----------	---------------	----------	---------------