

Sliding Door

ASSA ABLOY SL500 Resilience R128

ASSA ABLOY
Entrance Systems

Experience a safer
and more open world



Taking the oversize
hurricane door even further

Engineered for size...engineered for strength

Designing a door opening is all about choices...the type of product, the finish, the width, the height. When that door needs to be hurricane rated, traditionally options are limited. Until now. Building on the success of the already expansive SL500 Resilience R104, ASSA ABLOY is pleased to offer the ASSA ABLOY Resilience R128 hurricane resistant automatic sliding door. Offering medium stile door panels, 10" bottom rails, an innovative dry glazing system, up to 114 psf design pressure for full impact packages and heights all the way up to 128", it's the ideal product for home centers, garden centers and any application where an over height door package is required.



Think big...all the way to 128" tall

Your home center door requires robust performance, which is why the Resilience R128 is equipped with medium and 10" bottom rails and is built to withstand rugged conditions. With size parameters that take you up to 16' wide for bi-parts, 9' width for single slides and 128" overall frame heights, you're assured of an expansive door opening to meet your most challenging needs. Plus, its hurricane rated! Equipped with structural steel, the full impact package is rated up to 114 psf design pressure for use in hurricane zones. The package is Category D large missile impact test rated at 50 feet per second and features single point unlocking per operable panel to comply with NFPA 101 Life Safety Code.



State of Florida Approved		
Test	Result	
ASTM F-842-97 & F-588-97 Forced Entry Test	Passed	
TAS 202, ASTM E 330-97 Static Air Pressure	Passed	
TAS 202, ASTM E283-99 Air Infiltration	Passed	
TAS 201, ASTM E 1996-02 Impact, Large Missile	Passed	
TAS 203, ASTM E 1996 Cyclical Test	Passed	

ASSA ABLOY SL500 Resilience R128 Door Package	Florida Approval Number	Miami-Dade Approval Number
FBO Bi-Part/SingleSlide Impact	30356	NOA# 21-0324.12
FBO Bi-Part/Single Slide Non-Impact	30356	NOA# 21-0324.13



Glass replacement...in a snap

The Resilience R128 is designed for use with 9/16" hurricane resistant glass and features a strong yet time-saving dry glazing system which easily allows glass to be replaced on site without requiring the multi-week curing time of traditional wet glazing systems.

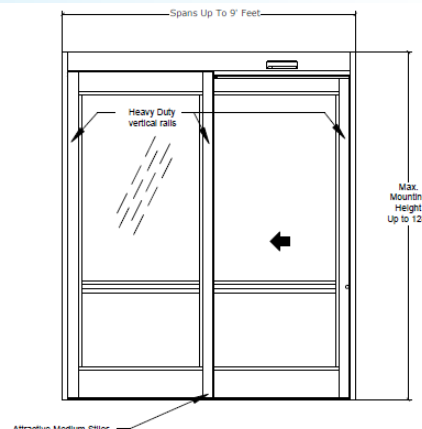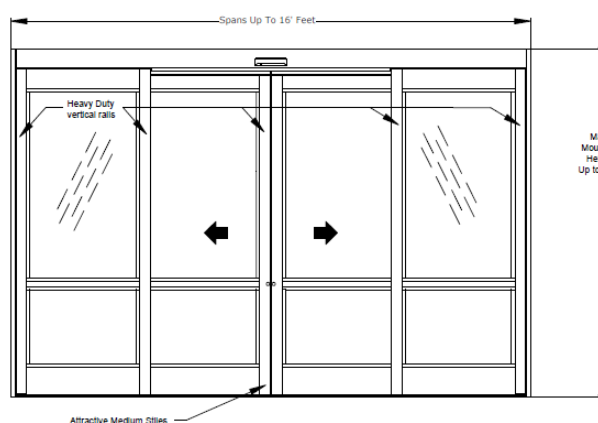

ASSA ABLOY SL500 Resilience R128 Features

- Up to 114 psf dependent on packages
- Max overall frame width: 16' bi-part, 9' single slide
- Max overall frame height: 128"
- State of Florida approval
- Miami Dade approval
- Standard 1-3/4" muntins bar (4" optional)
- Optional additional muntin bar (packages 113"+ height)
- Full dry glazed system
- On-site glass replacement
- Medium (full/non-impact) and narrow stile (non-impact) design
- 10" bottom rails
- Compliance with NFPA 101 life safety code
- Full impact packages
- Non-impact packages
- Single point unlocking per operable panel

ASSA ABLOY Entrance Systems
Tel: 1-866-237-2687 (US) • 1-888-608-9242 (Canada)
info-automatic.na.entrance@assaabloy.com
assaabloyentrance.us • assaabloyentrance.ca

ASSA ABLOY as words and logo are trademarks owned by the ASSA ABLOY Group.