

NOTE: THE STANDARD PACKAGE CONSISTS OF:
THE AUTOMATIC OPERATOR & WEATHERSTRIP. FRAMES. DOORS WITH
VERTICAL WEATHERSTRIP, EMERGENCY BREAKAWAY
& 2-POINT LOCK. OPTIONAL POSITION SWITCHES (DIGITAL (3 OR 5) OR
KEY (5)), (OFF-EXIT ONLY-AUTO-REDUCED OPENING-HOLD OPEN OR OFF,
AUTO, HOLD OPEN), MOTION/PRESENCE SENSORS, 6" JAMBS.
STANDARD FINISH: CLEAR- AA-M12C22A41, CLASS 1, .018 MM.
DARK BRONZE- AA-M12C22A44, CLASS 1, .018 MM
SPECIAL FINISHES ARE AVAILABLE.

THIS PACKAGE WILL ACCEPT UP TO 1" (25.4) INSULATED GLASS.

NOTE DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC
REF. AS FOLLOWS 1" (25.4) ALL METRIC SIZES ARE MILLIMETERS.

* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT SPECIFICATION, INSTALLATION INSTRUCTIONS, OR THE UL LABEL ON THE EQUIPMENT.



REFER TO RELEVANT (LOCAL, STATE, NATIONAL OR AHJ) BUILDING CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE BELOW.

MASONRY OPENING WIDTH C	ACTIVE LEAF WIDTH D	DOOR OPENING A	OVERALL FRAME HEIGHT	ROUGH OPENING HEIGHT	OVERALL FRAME WIDTH B
36" (914.4)	38 5/8" (981.1)	32 3/8" (822.3)	91" (2311.4)	84" (2134)	78 1/4" (1987.5)
42" (1066.8)	44 5/8" (1133.5)	38 3/8" (974.7)	91" (2311.4)	84" (2134)	90 1/4" (2292.4)
48" (1219.2)	50 5/8" (1285.9)	44 3/8" (1127.1)	91" (2311.4)	84" (2134)	102 1/4" (2597.2)
50 7/8" (1292.2)	53 1/2" (1358.9)	47 1/4" (1200.2)	91" (2311.4)	84" (2134)	108" (2743.2)
KEY	C+2 5/8" C+(66.7)"	C-3 5/8" C-(92.1)"	ROH+7" ROH+(177.8)"	OFH-7" OFH-(177.8)"	2C+6 1/4" 2C+(158.8)"

OFW NOTE: CONSULT FACTORY FOR EXTENDED HEADERS

STD. GLASS SIZE KEY*	WIDTH	C-2 1/4" C-(57.2)
	HEIGHT	(OFH)-15 7/8" (OFH)-(403.2)

* NARROW STILE RAILS w/ 1/4" GUTTER. NO MUTTINS BASED ON MASONRY OPENING

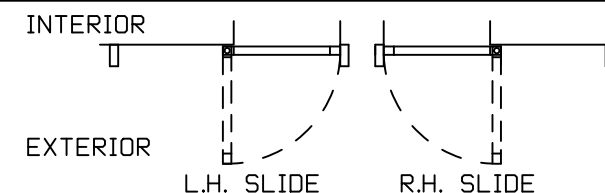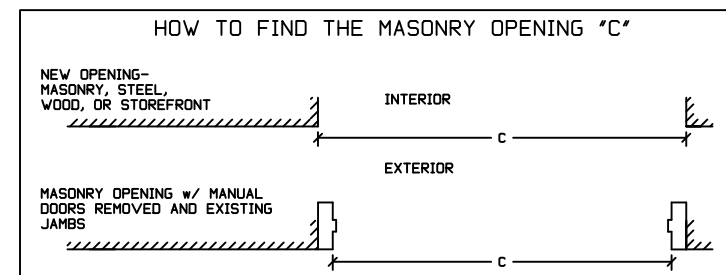

PLAN VIEW EMERGENCY BREAKAWAY

DWG NO. 1009872											
DRN BY	CLW	DATE	11/9/12	CHK BY	SS	DATE	11/14/12	REV.	5.0	DATE	01/19/22

ASSA ABLOY

