

NOTE: THE STANDARD PACKAGE CONSISTS OF:
THE AUTOMATIC OPERATOR & WEATHERSTRIP, FRAMES, DOORS WITH
VERTICAL WEATHERSTRIP, EMERGENCY BREAKAWAY
& 2-POINT LOCK, OPTIONAL POSITION SWITCHES (DIGITAL (3 OR 5) OR
KEY (5)), (OFF-EXIT ONLY-AUTO-REDUCED OPENING-HOLD OPEN OR OFF,
AUTO, HOLD OPEN), MOTION/PRESENCE SENSORS.
STANDARD FINISH: CLEAR- AA-M12C22A41, CLASS 1, .018 MM.
DARK BRONZE- AA-M12C22A44, CLASS 1, .018 MM
SPECIAL FINISHES ARE AVAILABLE.

THIS PACKAGE WILL ACCEPT UP TO 1" (25.4) INSULATED GLASS.

NOTE DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC
REF. AS FOLLOWS 1" (25.4) ALL METRIC SIZES ARE MILLIMETERS.

* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT SPECIFICATION, INSTALLATION INSTRUCTIONS, OR THE UL LABEL ON THE EQUIPMENT.

REFER TO RELEVANT (LOCAL, STATE, NATIONAL OR AHJ) BUILDING CODE FOR MIN DOOR HEIGHT & MIN/MAX WIDTH ALLOWABLE FOR EGRESS REQUIREMENT IN CONJUNCTION WITH TABLE BELOW.

MASONRY OPENING WIDTH C	ACTIVE LEAF WIDTH D	DOOR OPENING A	OVERALL FRAME HEIGHT	ROUGH OPENING HEIGHT	OVERALL FRAME WIDTH B
43 1/2" (1104.9)	24 3/8" (619.1)	36 1/4" (920.8)	91" (2311.4)	84" (2134)	96" (2438.4)
72" (1828.8)	38 5/8" (981.1)	64 3/4" (1644.7)	91" (2311.4)	84" (2134)	153" (3886.2)
84" (2133.6)	44 5/8" (1133.5)	76 3/4" (1949.5)	91" (2311.4)	84" (2134)	177" (4495.8)
96" (2438.4)	50 5/8" (1285.9)	88 3/4" (2254.3)	91" (2311.4)	84" (2134)	201" (5105.4)
KEY	(C/2)+2 5/8" (C/2)+(66.7)	C-7 1/4" (C-184.3)	ROH+7" (ROH+(177.8)	OFH-7" (OFH-(177.8)	2C+9" (2C+(228.6)

OFW NOTE: CONSULT FACTORY FOR EXTENDED HEADERS.

STD. GLASS SIZE KEY*	WIDTH	(C/2)-2 1/4" (C/2)-(57.2)
	HEIGHT	(OFH)-15 7/8" (OFH)-(403.2)

* NARROW STILE RAILS w/ 1/4" GUTTER, NO MUTTINS BASED ON MASONRY OPENING

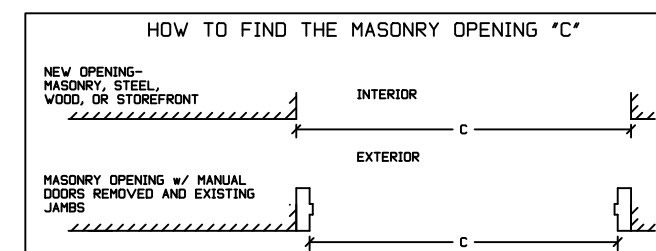


Diagram showing the view from the breakout side of the wall. It illustrates the interior and exterior spaces, the wall structure, and the location of the window opening. The view is from the exterior side, looking through the wall into the interior.

DWG NO. 1011271											
DRN BY	CLW	DATE	8/26/13	CHK BY	SS	DATE	8/26/13	REV.	4.0	DATE	01/19/22

ASSA ABLOY

