



HOLLOW METAL OR WOOD
FLUSH DOOR AND FRAME
BY OTHERS. _____



FOR WOOD AND HOLLOW —
METAL DOORS: SHOE SHOULD
BE MOUNTED TO DOOR USING
#1/4-20 BINDING HEAD POST
SCREWS (SEX BOLTS).
HARDWARE FOR DOOR
BY INSTALLER.

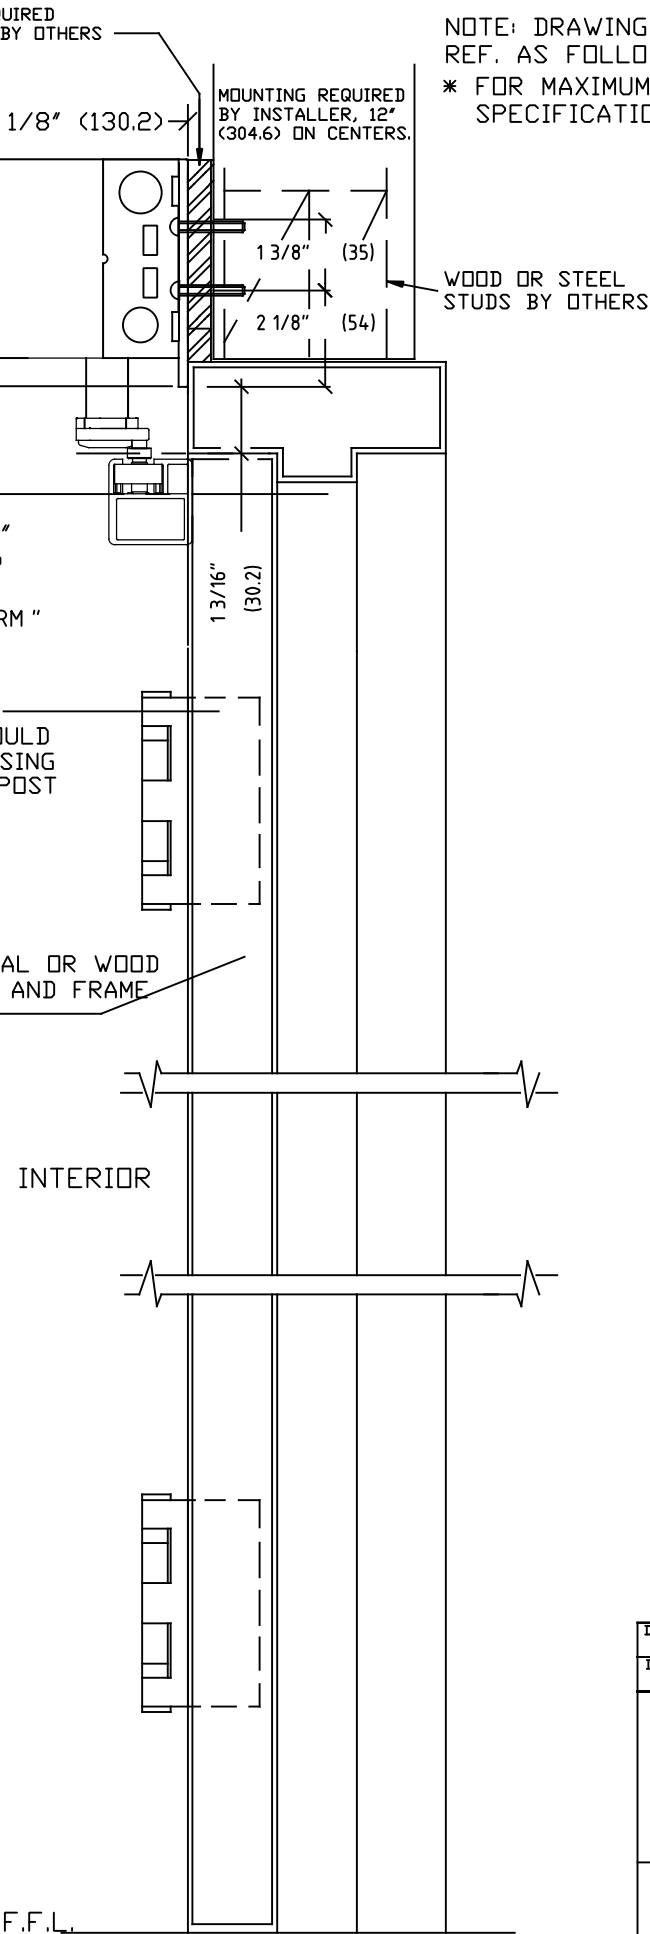

NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC.
REF. AS FOLLOWS: 1" (25.4). ALL METRIC SIZES ARE IN MILLIMETERS.
* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT
SPECIFICATION OR INSTALLATION INSTRUCTIONS.

MANUAL :-


PUSH OR PULL THE DOOR OPEN AND IT
CLOSES AS A NORMAL MANUAL DOOR CLOSER.

AUTOMATIC :-




ACTIVATE THE DOOR BY HANDICAPPED
PUSHPLATE AND THE DOOR WILL SLOWLY
POWER OPEN, TIME OUT, AND SLOWLY
CLOSE.

PUSH ACTIVATION :- (OPTIONAL)



PUSH OR PULL THE DOOR AND IT WILL
SLOWLY POWER OPEN , TIME OUT, AND
SLOWLY CLOSE.

NOTE :- OPERATIONAL ADJUSTMENTS TO BE IN ACCORDANCE WITH ANSI/BHMA STANDARD. FOR LOW ENERGY POWER OPERATED DOORS.

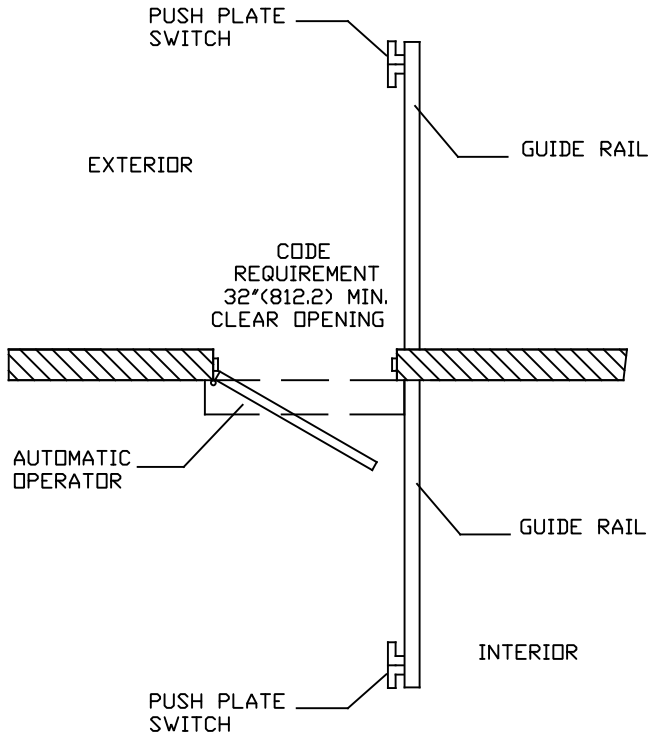

DWG NO. 1015905					
DRN BY	MHW	DATE	10/26/16	CHK BY	SS
		DATE	10/26/16	REV.	2.0
				DATE	1/18/18