


Technical Data Sheet

ASSA ABLOY SW100

ASSA ABLOY
Entrance Systems

Experience a safer
and more open world

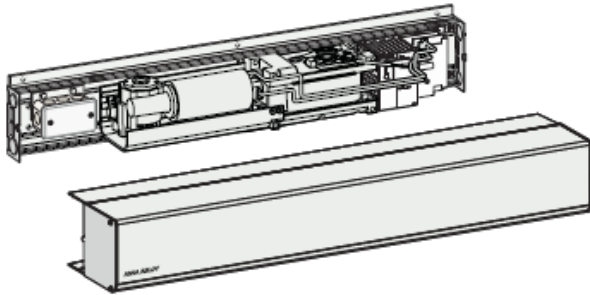

SW100 Swing Door Operator

The ASSA ABLOY SW100 is an automatic swing door operator developed to facilitate entrances to buildings and within buildings through swing doors. The SW100 is a low-energy operator using a DC motor and a gear-reduction system to drive an arm system, which opens the door. It is recommended to be installed on internal swing doors. The ASSA ABLOY SW100 is the ideal low energy operator for applications that need reliable, durable entrances with the strength to withstand continuous usage. For universities, schools, and commercial buildings, the ASSA ABLOY SW100 is a dependable, convenient door that meets the gentle push forces of low energy codes and manual use. The motor, oil pump and gear system are combined into a compact unit mounted alongside the control unit within the cover. The operator is connected to the door leaf with different arm systems. The ASSA ABLOY SW100 is designed to offer continuous use, a high degree of safety and maximum performance over the lifetime of your entrance.


Operator Features and Performance

- Operator: electro-mechanical, non-handed operator, 24 volt, 5/16 hp motor
- ANSI Compliance: ANSI A156.19
- Door Weight: 100-200lbs
- Door Size: 36-48" (consult for wider sizes)
- Manual Push Force: adjustable from 5 lbf – 15 lbf
- Hold Open Time: adjustable from 1.5 seconds to 30 seconds
- Low power consumption – average electrical power required to open a 36" (914 mm) door is 25W resulting in lower running costs.
- Stack Pressure Compensation: the electronic control allows for increases of forces to overcome mild stack pressures while automatically compensating to power manual push forces to comply with ANSI A156.19 when the door is used in manual mode.
- Power assist open – torque-controlled feature that can be adjusted to lower the open forces when the operator is used manually.



- Latch Retry: if an attempt to close the door is unsuccessful, the operator will reverse 10 degrees and reclose in an attempt to successfully lock the door.
- Astragal coordination
- Inertia learn cycle
- ANSI compliant lock kick
- Battery convenience mode
- Obstruction control
- Electronic dampening


Door Set-ups:

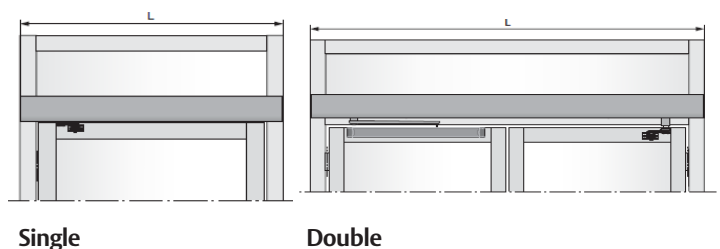

Operation

- Push and go feature allowing door to open automatically when operator senses movement of door (ANSI A156.19)
- Power assist open – provides easy to open push forces (ANSI A156.19)
- Internal, push to open, push to close (i.e., ratchet relay)
- Speed controlled Extended Closing Torque (ECT) to provide power assist close with on-board functionality to automatically adjust torque without increasing speed
- Loss of Power: the operator controls the door closing, preventing slamming of door
- Torque Limiting: if positive air pressure condition is removed, operator compensates accordingly and will not slam

Door Operator Handings



Electric Lock Management

- Lock monitoring prevents operator(s) from opening door(s) until release of electrified lock
- Operator pulls door closed before opening, unjamming electric latch hardware
- Sequenced operation between operators for pairs of doors allowing lock release and astragal coordination
- Electric Lock Output: selectable 12 VDC, maximum 1200 mA / 24 VDC, maximum 600 mA

Aesthetics

- Aesthetically pleasing, low profile appearance: 4-5/16" (109mm) high by 5-1/8" (130mm) deep
- Continuous header for full width of door
- Same header/housing as ASSA ABLOY PowerSwing and ASSA ABLOY SW200i for consistent sightlines in your facility
- Finishes: anodized, powder coat, Kynar, clad

Configurations

- Surface Applied

Authorities

- UL/CUL approved
- UL Listed Fire Door Operator
- UL325
- IBC and CBC
- ANSI A156.19
- California State Fire Marshall

Sensor Packages

- Sensor Package as follows:
 - Activation: push plates per your selection
 - Safety devices: not required per ANSI. Optional door mounted presence sensors (DMPS) are available



Authorities

Operator type	Electro-mechanical
Door width	36" – 48" (914 – 1219mm)
Door weight	100-200lbs
Power supply	120 V AC +10/-15%, 50/60 hz
Power consumption	Max. 230W
Auxiliary voltage	24 V DC, max. 400 mA
Main fuse F1,F2	2 x T 6,3 AH/250 V
Electro-mechanical locking device	Selectable: 12V DC, max. 500 mA or 24 V DC, max. 250 mA
Door opening	Push: 80 – 110° with reveal 0 – 12" (0 – 305mm) Pull: 80 – 110° with reveal 5/8 - 2" (16 - 51mm)
Opening time (0 – 80o)	Variable between 2 – 12 seconds
Closing time (90 – 100o)	Variable between 4 – 12 seconds
Hold open time	1.5-30 seconds
Ambient temperature	-4 °F to +113 °F (-20 °C to +45 °C)
Relative humidity	Max. 85%
Drive weight unit	7.1 kg
Class of protection	IP 20.
Complies with: IEC 335-1, ANSI/BHMA A156.19 and UL 325	