




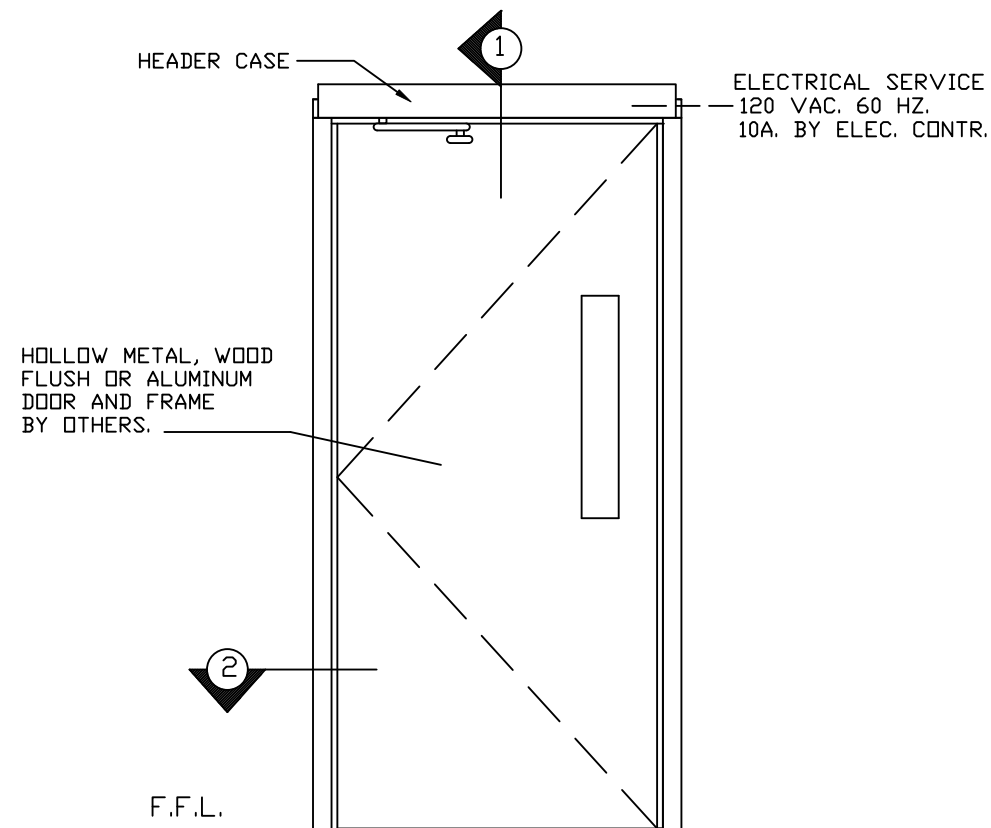


INTERIOR ELEVATION
(L.H. SHOWN/R.H. OPPOSITE)
SW300 SA (SINGLE)

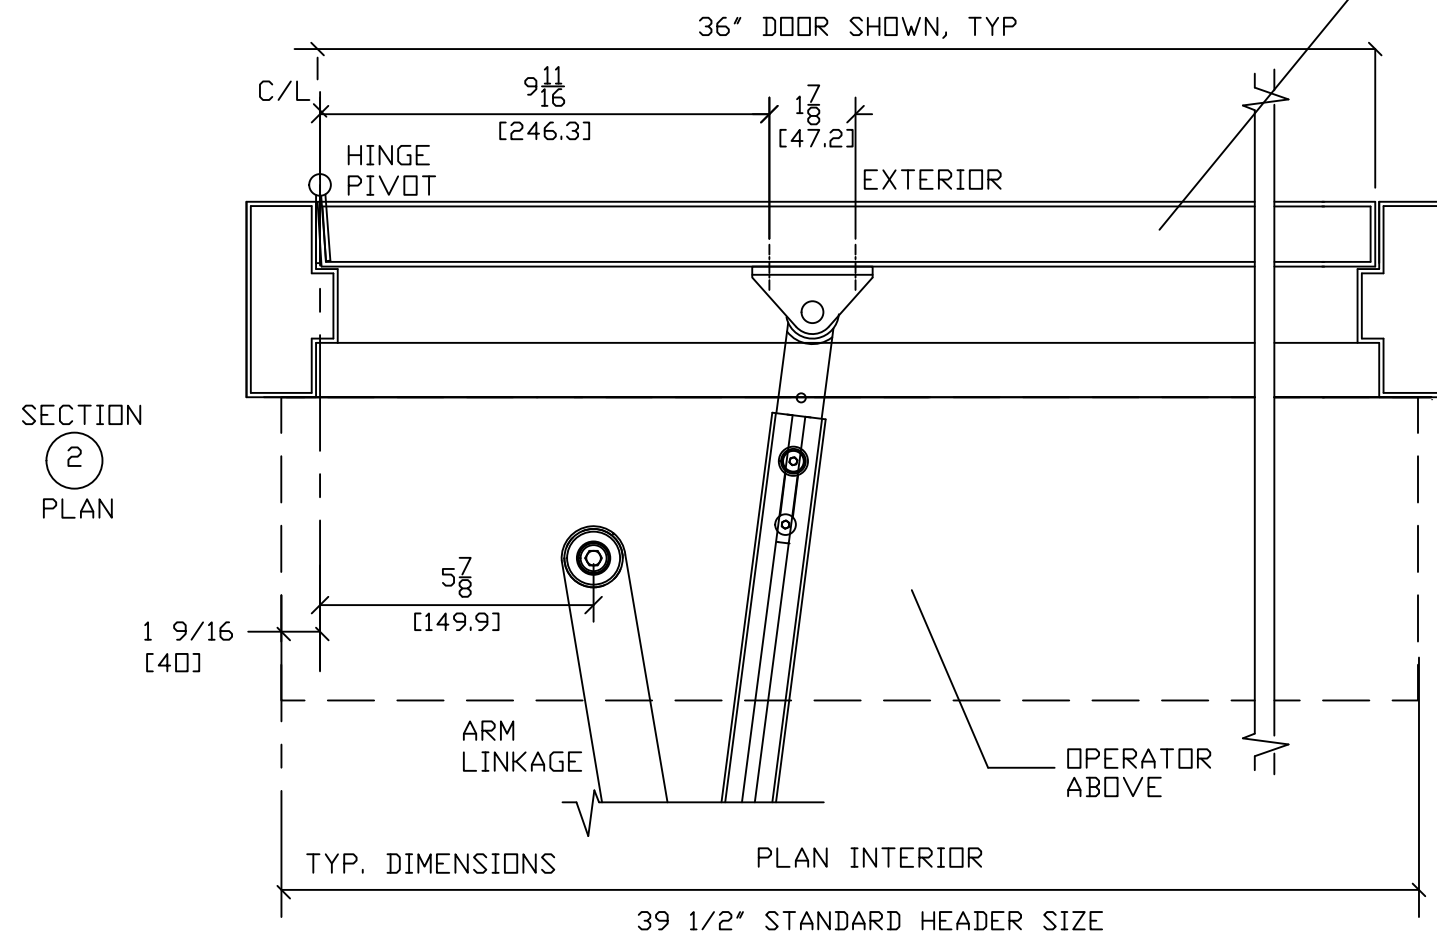


SECTION
2
PLAN

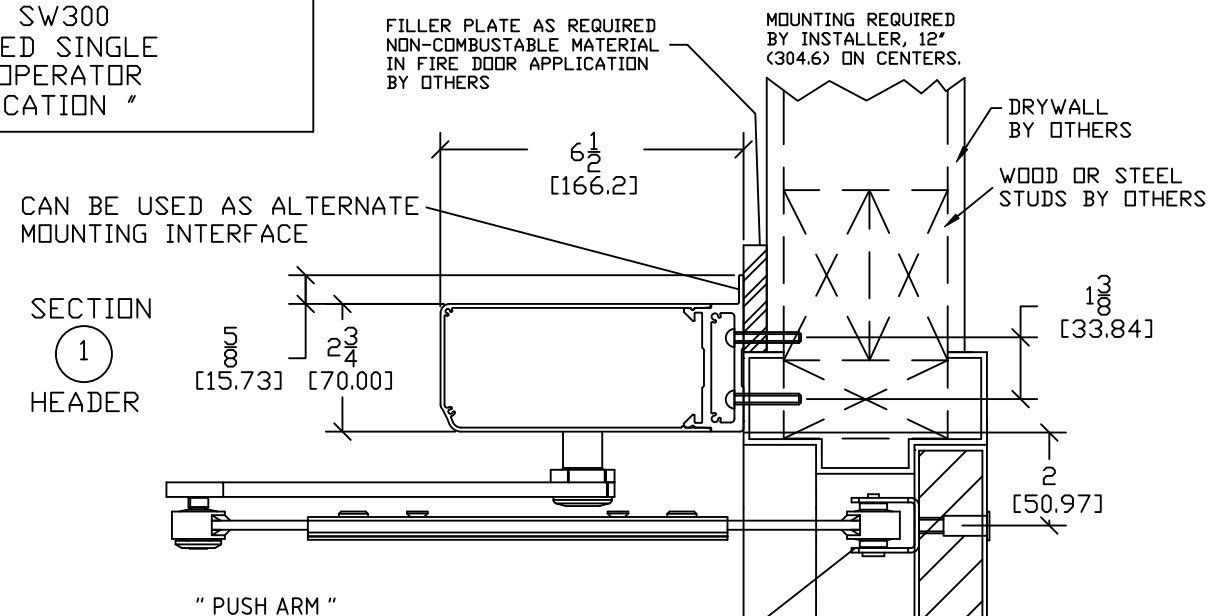

SECTION
1
HEADER

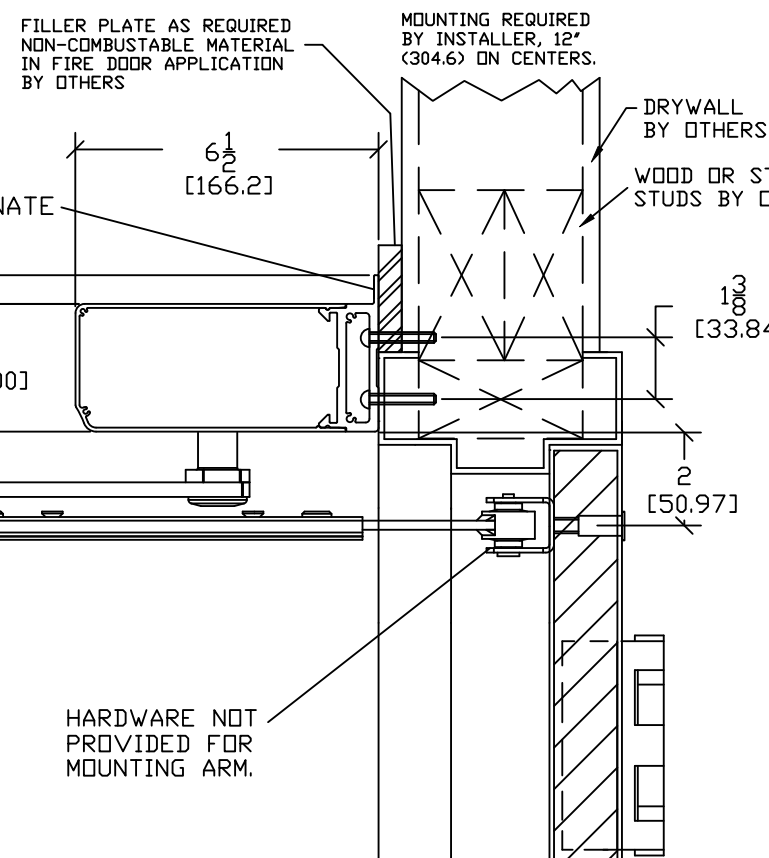

HARDWARE NOT
PROVIDED FOR
MOUNTING ARM.

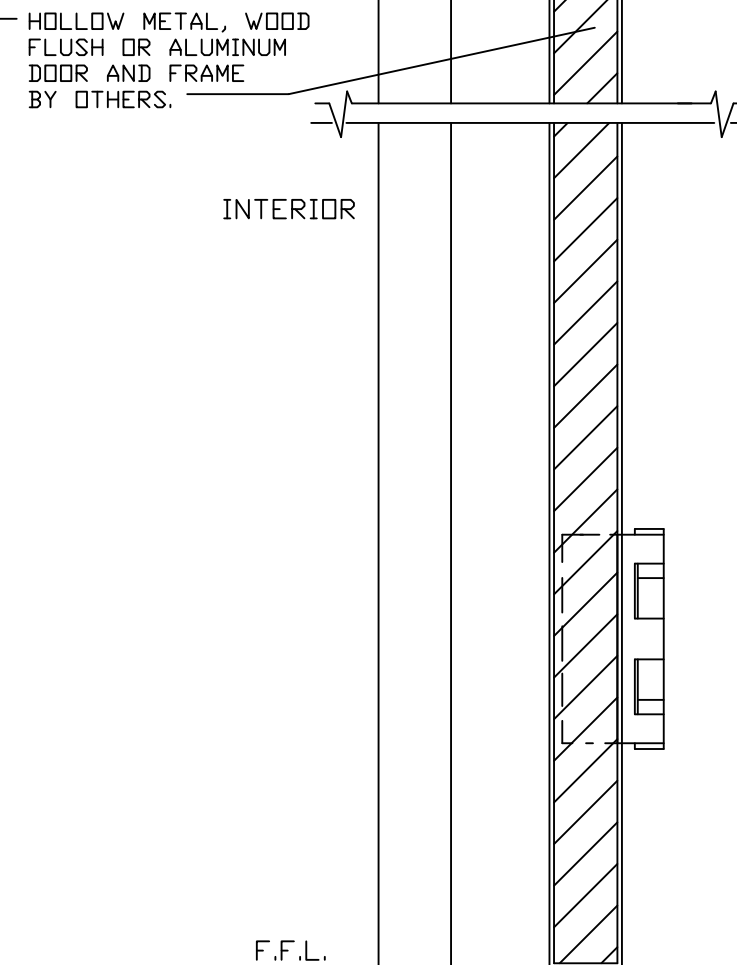

INTERIOR

F.F.L.

NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH
AND METRIC. REF. AS FOLLOWS: 1: (25.4).
ALL METRIC SIZES ARE IN MILLIMETERS.

NOTE:

PACKAGE INCLUDES AUTOMATIC OPERATOR, CONTROLLER,
PUSH ARM AND SENSOR SYSTEM PER YOUR SELECTION.
SEE I-ADAPT DRAWINGS 1010265 AND 1010266 FOR DETAILS


SW300 IS DESIGNED FOR HIGH PERFORMANCE, HEAVY USAGE PEDESTRIAN APPLICATIONS THAT COMPLY WITH ANSI A156.10.  THE OPERATOR CAN ALSO BE ADJUSTED FOR LOWER MANUAL PUSH FORCES TO COMPLY WITH ANSI A156.19 AND FIRE DOOR REGULATIONS. SW300 SHIPS AS LOW ENERGY BUT CAN BE PROGRAMMED AS FULL ENERGY. SW300 IS A DUAL ACTING OPERATOR.

STANDARD FINISH:
CLEAR - AA-C23-A31
DARK BRONZE - AA-C23-A44
SPECIAL FINISHES ARE AVAILABLE

OPTIONS AVAILABLE:

- RECEIVERS/TRANSMITTERS, SEE SHEET AA-192 FOR DETAILS
- SWITCHES/MODE SELECTORS, SEE SHEET AA-193 FOR DETAILS
- PUSHPLATES/WAVEPLATES, SEE SHEET AA-194 FOR DETAILS
- PUSH ARM, SEE SHEET AA-197 FOR DETAILS
- ELECTRICAL CONNECTIONS, SEE SHEET AA-199 FOR DETAILS

SEE SHEET DS-12 FOR ALL OTHER OPTIONS.



NOTE: *
NET CLEAR (EGRESS MIN 32" (813)) DOOR

ENCROACHMENT OF 4" INTO NET CLEAR BY
PANIC HARDWARE IS PERMITTED ABOVE 34".

* GUIDE RAILS (SHOWN, PROVIDED BY OTHERS) ARE
REQUIRED ON THE SWINGPATH SIDE OF POWER OPERATED
PEDESTRIAN DOORS (ANSI A156.10) BUT NOT ON
LOW ENERGY POWER OPERATED DOORS (ANSI A156.19).

[illegible]