


NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC.  
REF. AS FOLLOWS: 1" (25.4). ALL METRIC SIZES ARE IN MILLIMETERS.

\* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT  
SPECIFICATION OR INSTALLATION INSTRUCTIONS.  
POWER ADAPTOR TO BE INSTALLED PER NFPA 70/NEC REQUIREMENTS AND/OR AHJ

FOR INTERIOR AND  
EXTERIOR WITH LOW  
WIND APPLICATION  
USE ONLY

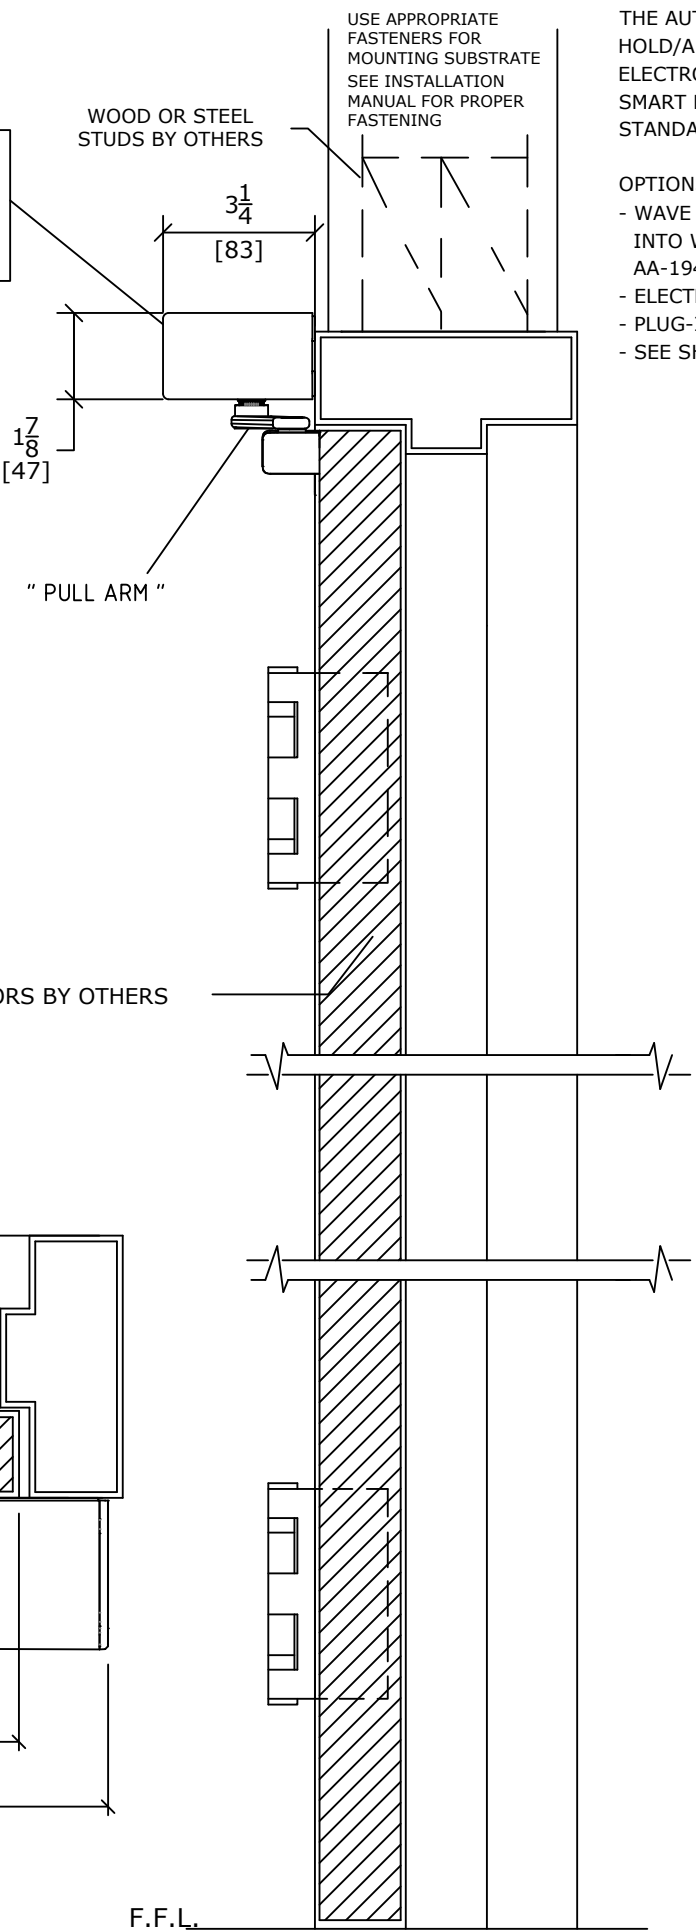

**NOTE:** THE STANDARD PACKAGE CONSISTS OF:  
THE AUTOMATIC OPERATOR, CONTROLLER, POWER SUPPLY, PULL ARM, SPINDLE COVERS,  
HOLD/AUTO/OFF SWITCH, SMART DEVICE OPERATION VIA APP (DEVICE BY OTHERS), DOOR STOP,  
ELECTRONIC & MECHANICAL LOCK KICK.  
SMART DEVICE DIAGNOSTICS & STATISTICS VIA APP (DEVICE BY OTHERS)  
STANDARD FINISH: CLEAR OR DARK BRONZE

- OPTIONS:
- WAVE OR PRESS ACTIVATION PLATES (PLATES CAN BE CONCEALED INTO WALL OR SURFACE MOUNTED WITH WATER RESISTANT PLASTIC ENCLOSURE) , CUT SHEET AA-194
  - ELECTRIC STRIKE TO RELEASE DOOR LATCH (IF EQUIPPED)
  - PLUG-IN POWER SUPPLY KIT, CUT SHEET AA-64
  - SEE SHEET OS-8 FOR ALL OTHER OPTIONS.

**AUTOMATIC :-**


ACTIVATE THE DOOR BY HANDICAPPED  
WAVE/PRESS PLATE AND THE DOOR WILL SLOWLY  
POWER OPEN, TIME OUT, AND SLOWLY  
CLOSE.

**PUSH ACTIVATION :- (OPTIONAL)**

PUSH OR PULL THE DOOR AND IT WILL  
SLOWLY POWER OPEN , TIME OUT, AND  
SLOWLY CLOSE.

**NOTE :** OPERATIONAL ADJUSTMENTS TO BE IN  
ACCORDANCE WITH ANSI/BHMA A156.19 STANDARD.  
FOR LOW ENERGY POWER  
OPERATED DOORS.

**NOTE :** WAVE/PRESS PLATE ACTIVATION TO BE LOCATED  
WITHIN VIEW OF THE DOOR. REFERENCE ANSI A156.19  
FOR FURTHER DETAILS.

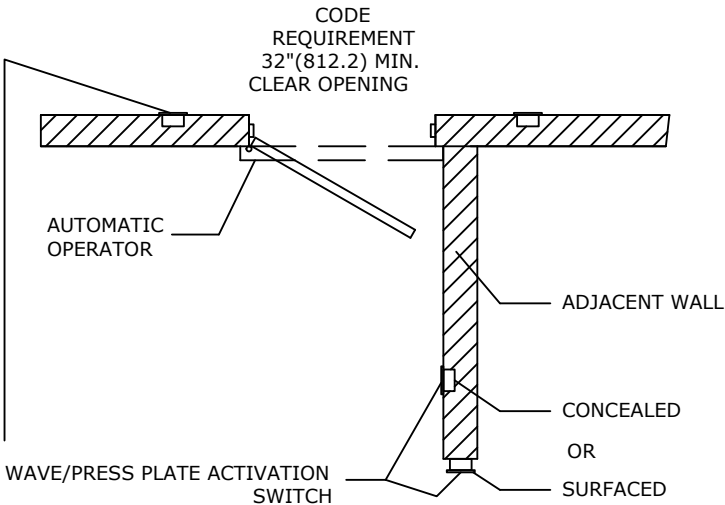

DWG NO.	ACH-1570794				
DRN BY	SS	DATE	7/23/20	CHK BY	DATE
				REV. 2.0	DATE 8/13/25