
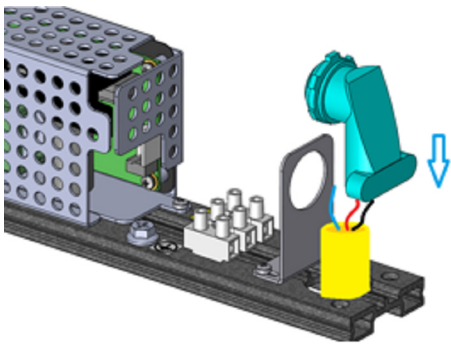

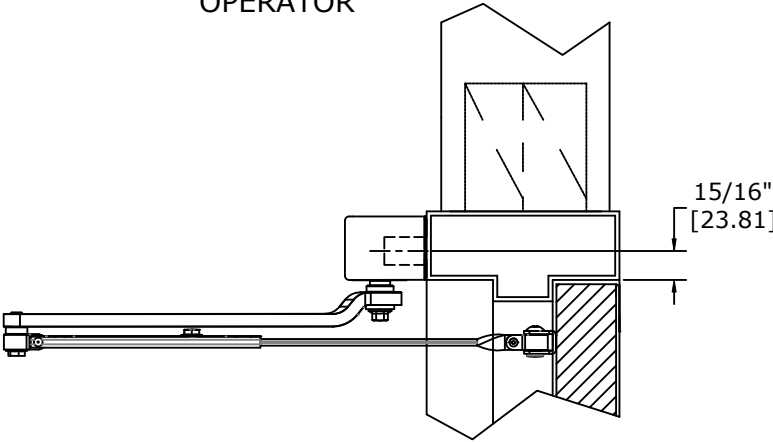
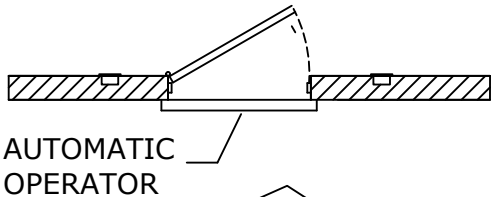
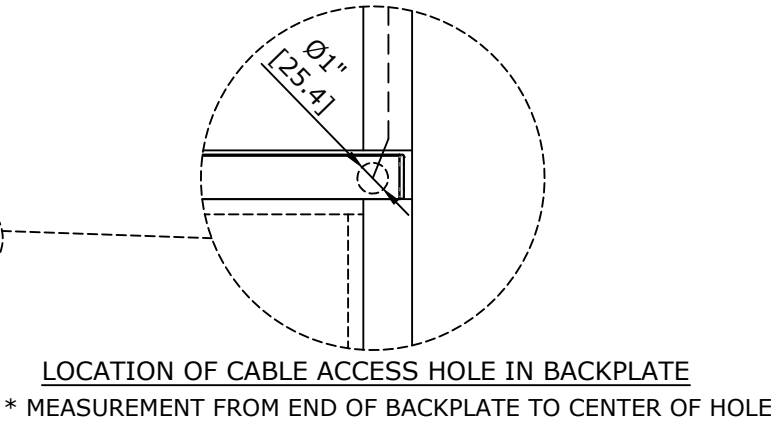


TYPICAL WIRING DETAIL/SINGLE ALUMINUM DOOR

- SW60 SINGLE DOOR OPERATOR/ PUSH APPLICATION, LEFT HAND, RIGHT HAND
- FOR INFORMATION ONLY, THE WIRING REQUIRED FOR A SPECIFIC PROJECT MAY DIFFER
- THE WIRING MUST BE IN THE SAME SIDE AS THE INSTALLATION OF THE HEADER OF THE SW60 DOOR OPERATOR

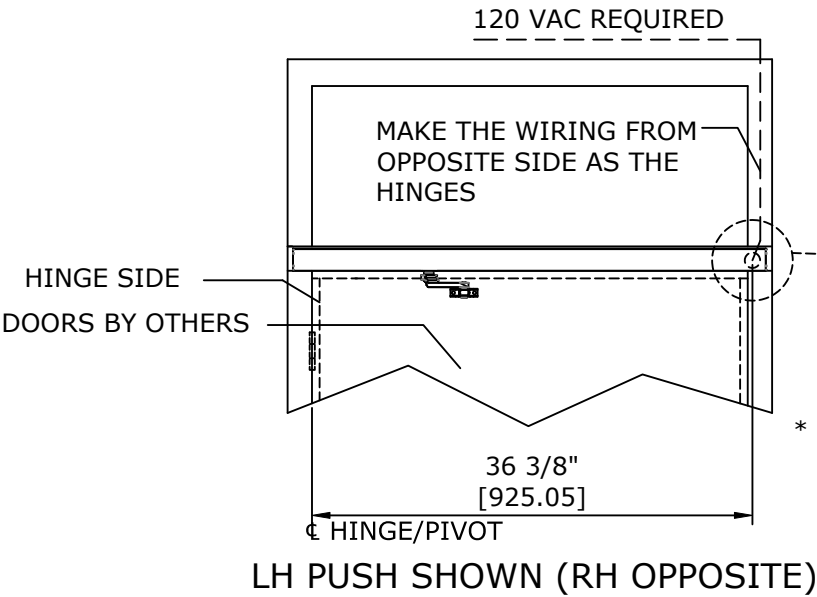

ELECTRICAL CONNECTION INSIDE SW60  
USE 3/8" GALFLEX (OR EQUAL) RWS METALLIC ARMORED FLEXIBLE CONDUIT (MIN 14 GA), RIGHT ANGLE ADAPTOR TO BE SUPPLIED BY ELECTRICIAN FOR ELECTRICAL CONNECTION

ADDITIONAL INFORMATION

- THE 120V WILL BE CONNECTED INSIDE THE OPERATOR BY ELECTRICAL CONTRACTOR
- WARNING, THE OPENING DIRECTION MAY BE DIFFERENT THAN THE PROVIDED DRAWING
- POWER ACCESS HOLE WILL ALWAYS BE 36 3/8" FROM THE HINGE NO MATTER SIZE OF THE DOOR.

|   |    |      |          |        |      |      |     |      |          |
|---|----|------|----------|--------|------|------|-----|------|----------|
| DWG NO. D001570711-001                          |    |      |          |        |      |      |     |      |          |
| DRN BY  | SS | DATE | 11/20/24 | CHK BY | DATE | REV. | 1.0 | DATE | 11/20/24 |
| <div></div> <div></div> <div></div> <div></div> |    |      |          |        |      |      |     |      |          |