







TYPICAL WIRING DETAIL/SINGLE ALUMINUM DOOR

- SW60 SINGLE DOOR OPERATOR/ PULL APPLICATION, RIGHT HAND, LEFT HAND
- FOR INFORMATION ONLY, THE WIRING REQUIRED FOR A SPECIFIC PROJECT MAY DIFFER
- THE WIRING MUST BE IN THE SAME SIDE AS THE INSTALLATION OF THE HEADER OF THE SW60 DOOR OPERATOR

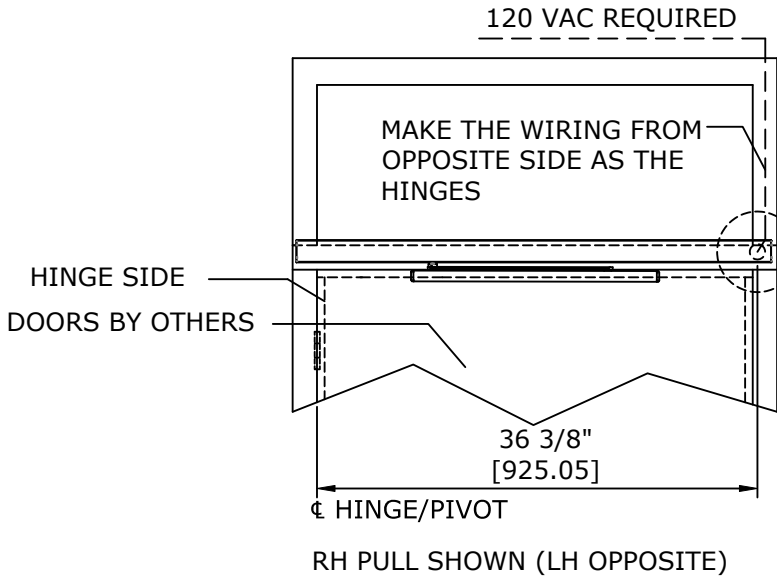

LOCATION OF CABLE ACCESS HOLE IN BACKPLATE

* MEASUREMENT FROM END OF BACKPLATE TO CENTER OF HOLE

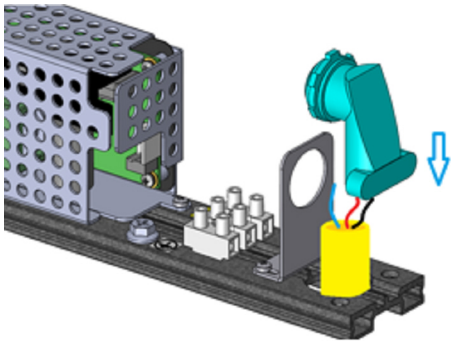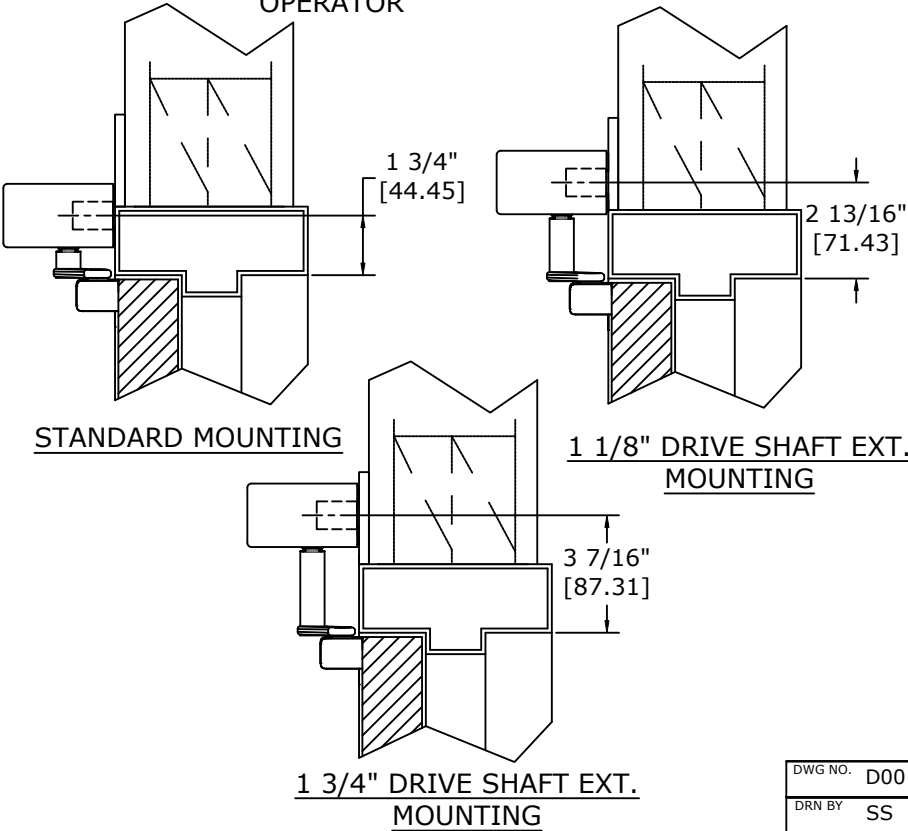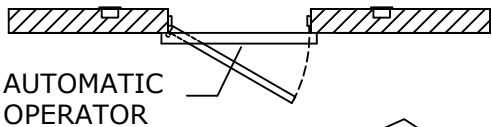

ELECTRICAL CONNECTION INSIDE SW60

USE 3/8" GALFLEX (OR EQUAL) RWS METALLIC ARMORED FLEXIBLE CONDUIT (MIN 14 GA), RIGHT ANGLE ADAPTOR TO BE SUPPLIED BY ELECTRICIAN FOR ELECTRICAL CONNECTION

DWG NO. D001570717-001		DRN BY SS		DATE 11/20/24	CHK BY	DATE	REV. 1.0	DATE 11/20/24
------------------------	--	-----------	--	---------------	--------	------	----------	---------------

- ADDITIONAL INFORMATION
- THE 120V WILL BE CONNECTED INSIDE THE OPERATOR BY ELECTRICAL CONTRACTOR
 - WARNING, THE OPENING DIRECTION MAY BE DIFFERENT THAN THE PROVIDED DRAWING
 - POWER ACCESS HOLE WILL ALWAYS BE 36 3/8" FROM THE HINGE NO MATTER SIZE OF THE DOOR.