


FOR INTERIOR AND
EXTERIOR WITH LOW
WIND APPLICATION
USE ONLY

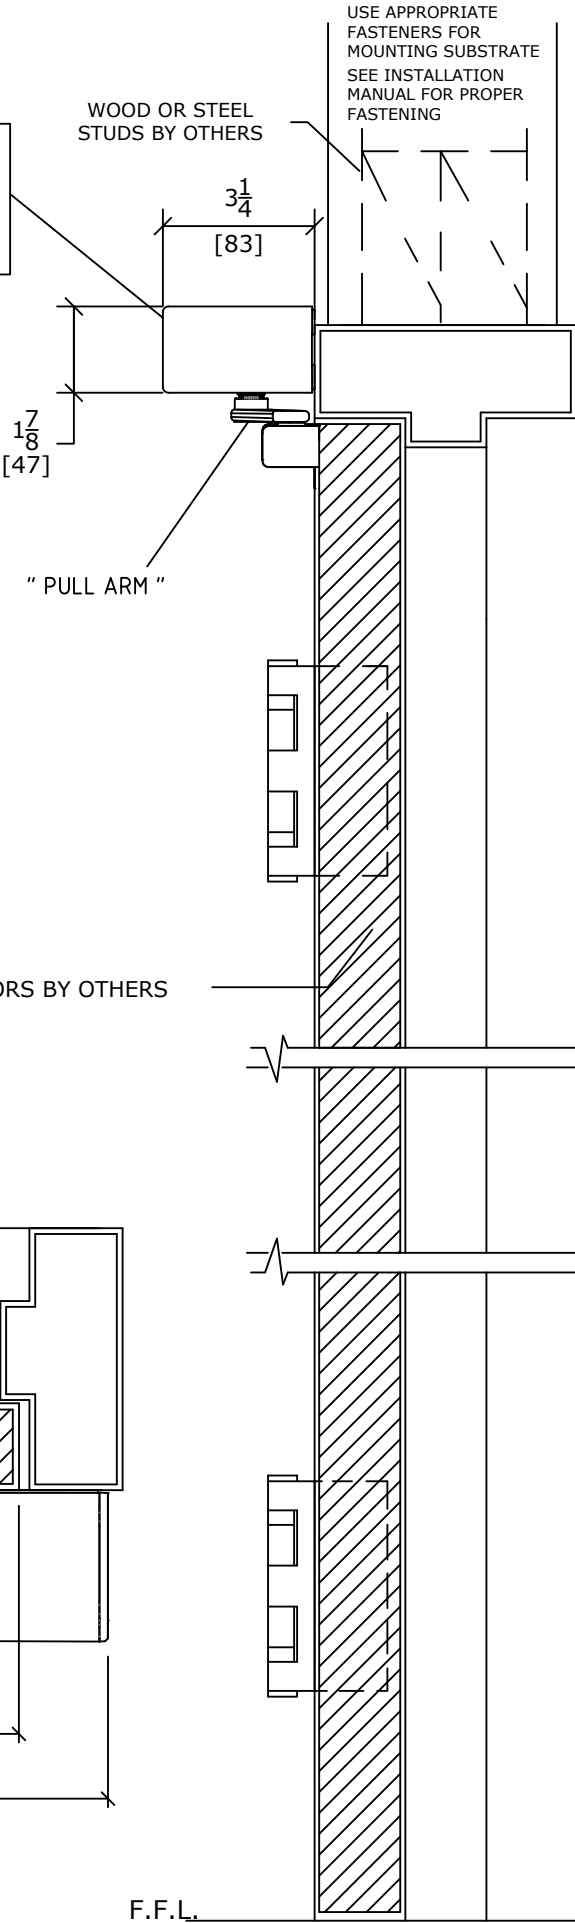

NOTE: THE STANDARD PACKAGE CONSISTS OF:
THE AUTOMATIC OPERATOR, CONTROLLER, POWER SUPPLY, PULL ARM, SPINDLE COVERS,
HOLD/AUTO/OFF SWITCH, SMART DEVICE OPERATION VIA APP (DEVICE BY OTHERS), DOOR STOP,
ELECTRONIC & MECHANICAL LOCK KICK.
SMART DEVICE DIAGNOSTICS & STATISTICS VIA APP (DEVICE BY OTHERS)
STANDARD FINISH: CLEAR OR DARK BRONZE

- OPTIONS:
- REMOTE POWER BOX ADAPTOR KIT, CONCEALED IN CEILING OR FLUSH MOUNTED IN WALL. CUT SHEET AA-60
 - SURFACE MOUNTED WIRE MOLD
 - DOOR MOUNTED APPROACH SIDE SAFETY SENSOR
 - WAVE OR PRESS ACTIVATION PLATES (PLATES CAN BE CONCEALED INTO WALL OR SURFACE MOUNTED WITH WATER RESISTANT PLASTIC ENCLOSURE)
 - ELECTRIC STRIKE TO RELEASE DOOR LATCH (IF EQUIPPED)
 - PLUG-IN POWER SUPPLY KIT, CUT SHEET AA-64

AUTOMATIC :-



ACTIVATE THE DOOR BY HANDICAPPED
WAVE/PRESS PLATE AND THE DOOR WILL SLOWLY
POWER OPEN, TIME OUT, AND SLOWLY
CLOSE.


PUSH ACTIVATION :- (OPTIONAL)



PUSH OR PULL THE DOOR AND IT WILL
SLOWLY POWER OPEN , TIME OUT, AND
SLOWLY CLOSE.

NOTE : OPERATIONAL ADJUSTMENTS TO BE IN
ACCORDANCE WITH ANSI/BHMA A156.19 STANDARD.
FOR LOW ENERGY POWER
OPERATED DOORS.

NOTE : WAVE/PRESS PLATE ACTIVATION TO BE LOCATED
WITHIN VIEW OF THE DOOR. REFERENCE ANSI A156.19
FOR FURTHER DETAILS.

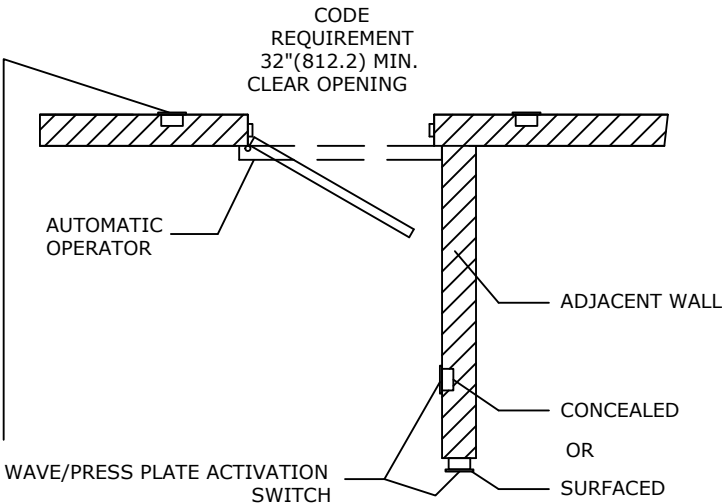

DWG NO. D001570794-001					
DRN BY	SS	DATE	7/23/20	CHK BY	DATE
					REV. 3.0
					DATE 11/18/24

NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH AND METRIC.
REF. AS FOLLOWS: 1" (25.4). ALL METRIC SIZES ARE IN MILLIMETERS.

* FOR MAXIMUM CURRENT DRAW PER OPERATOR, SEE PRODUCT
SPECIFICATION OR INSTALLATION INSTRUCTIONS.
POWER ADAPTOR TO BE INSTALLED PER NFPA 70/NEC REQUIREMENTS AND/OR AHJ